

**Revised**

# **Semiannual Groundwater Monitoring Report Second Quarter 2014 and Third Quarter 2014 Laborde Canyon (Lockheed Martin Beaumont Site 2) Beaumont, California**



Prepared for:



Prepared by:



**TETRA TECH**  
301 E. Vanderbilt, Suite 450  
San Bernardino, California 92408  
TC# 31299-B2GWOM.04/ February 2015



**Matthew Rodriguez**  
Secretary for  
Environmental Protection



## Department of Toxic Substances Control

Barbara A. Lee, Director  
5796 Corporate Avenue  
Cypress, California 90630



**Edmund G. Brown Jr.**  
Governor

February 10, 2015

Mr. Brian T. Thorne  
Remediation Analyst Senior Staff  
Lockheed Martin Corporation  
Enterprise Business Services – EESH  
2550 N. Hollywood Way, Suite 406  
Burbank, CA 91505-5047

SEMIANNUAL GROUNDWATER MONITORING REPORT, SECOND AND THIRD  
QUARTER 2014, LOCKHEED MARTIN CORPORATION, BEAUMONT SITE 2,  
BEAUMONT, CALIFORNIA (Site Code: 400261)

Dear Mr. Thorne:

The Department of Toxic Substances Control (DTSC) has reviewed the subject report and has the following comments:

1. Page 4-5, Summary: GSU requests clarification on this seemingly contradictory statement: "The perchlorate plume does not appear to extend off-site, but terminates in the riparian corridor south of the southern site boundary." If the plume terminates south of the southern boundary then the plume is offsite, as illustrated by Figure 11. The statement should be revised accordingly.
2. Appendix H: All final laboratory reports should be signed and approved by a qualified professional.


Dina would like to observe surface water sampling at Site 2 during their next event. Please coordinate with Dina to set up the site visit.

Please address the aforementioned comments and/or make the appropriate revisions by March 10, 2015.

Mr. Brian T. Thorne  
February 10, 2015  
Page 2 of 2

Should you have any questions or comments, please feel contact to me at [Daniel.Zogaib@dtsc.ca.gov](mailto:Daniel.Zogaib@dtsc.ca.gov) or at (714) 484-5483.

Sincerely,

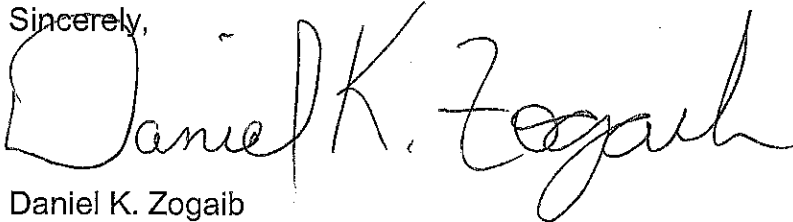A handwritten signature in black ink that reads "Daniel K. Zogaib". The signature is fluid and cursive, with the first name "Daniel" being the most prominent.

Daniel K. Zogaib  
Project Manager  
Brownfields and Environmental Restoration Program

cc: Mr. Gene Matsushita  
Senior Manager  
Environmental Remediation  
Lockheed Martin Corporation  
Enterprise Business Services – EESH  
2550 N. Hollywood Way, Suite 406  
Burbank, CA 91505-5047

**Responses to DTSC Comments**  
**Semiannual Groundwater Monitoring Report, Second Quarter 2014 and Third Quarter 2014**  
**Laborde Canyon (Lockheed Martin Beaumont Site 2)**  
**Beaumont, California**  
**Tetra Tech, Inc**  
**February 24, 2015**

Comments from DTSC Dated February 10, 2015		
Comment	Response	Proposed Action
Page 4-5, Summary: GSU requests clarification on this seemingly contradictory statement: "The perchlorate plume does not appear to extend off-site, but terminates in the riparian corridor south of the southern site boundary." If the plume terminates south of the southern boundary then the plume is offsite, as illustrated by Figure 11. The statement should be revised accordingly.	We concur that the sentence referenced in this comment is unclear.	The referenced sentence will be rephrased as follows:  <i>"The perchlorate plume appears to extend offsite, terminating in the riparian corridor south of the southern site boundary."</i>
Appendix H: All final laboratory reports should be signed and approved by a qualified professional.	The electronic reports received from the laboratory included the appropriate signature, but the signature was inadvertently removed when the laboratory reports were compiled into a single file. Electronic file handling procedures have been revised to prevent this issue from recurring in the future.	Revised electronic copies of the laboratory reports will be included with the final version of the report.





February 24, 2014

Mr. Daniel Zogaib  
Southern California Cleanup Operations  
Department of Toxic Substances Control  
5796 Corporate Avenue  
Cypress, CA 90630

Subject: Submittal of Responses to Comments and Revised *Semiannual Groundwater Monitoring Report, Second Quarter 2014 and Third Quarter 2014, Laborde Canyon (Lockheed Martin Beaumont Site 2), Beaumont, California*

Dear Mr. Zogaib:

Please find enclosed one hard copy of the body of the report and two compact disks with the report body and appendices of the revised *Semiannual Groundwater Monitoring Report, Second Quarter 2014 and Third Quarter 2014, Laborde Canyon (Lockheed Martin Beaumont Site 2), Beaumont, California* for your approval. Also enclosed are responses to comments provided by DTSC on February 10, 2015.

If you have any questions regarding this submittal, please contact me at 818-847-9901 or [brian.thorne@lmco.com](mailto:brian.thorne@lmco.com).

Sincerely,

A handwritten signature in black ink, appearing to read "Brian T. Thorne".

Brian T. Thorne  
Project Lead

Enclosure: Revised *Semiannual Groundwater Monitoring Report, Second Quarter 2014 and Third Quarter 2014, Laborde Canyon (Lockheed Martin Beaumont Site 2), Beaumont, California*

cc: Mr. Gene Matsushita, Lockheed Martin (electronic copy)  
Ms. Barbara Melcher, CDM Smith (electronic copy)

BUR047\_Beau2 Trans\_Q2Q3 2014 GWMR

---


# **Semiannual Groundwater Monitoring Report Second Quarter 2014 and Third Quarter 2014 Laborde Canyon (Lockheed Martin Beaumont Site 2) Beaumont, California**


Prepared for:  
Lockheed Martin Corporation

Prepared by:  
Tetra Tech

February 2015

  
\_\_\_\_\_  
Christopher Patrick  
Environmental Scientist

  
\_\_\_\_\_  
Mark Feldman, CHG CEG  
Project Manager



---

# TABLE OF CONTENTS

<b><u>Section</u></b>	<b><u>Page</u></b>
Section 1 Introduction .....	1-1
1.1    Site Background .....	1-1
Section 2 Summary of Monitoring Activities .....	2-1
2.1    Groundwater Level Measurements.....	2-1
2.2    Surface Water Sampling.....	2-1
2.3    Groundwater Sampling.....	2-2
2.3.1    Proposed and Actual Well Locations Sampled .....	2-4
2.3.2    Groundwater Sampling Procedures .....	2-4
2.4    Analytical Data QA/QC .....	2-5
2.5    Habitat Conservation .....	2-5
Section 3 Groundwater Monitoring Results .....	3-1
3.1    Groundwater Elevation and Flow.....	3-1
3.2    Groundwater Gradients .....	3-2
3.3    Surface Water Flow .....	3-2
3.4    Analytical Data Summary .....	3-3
3.4.1    Data Quality Review .....	3-3
3.5    Chemicals of Potential Concern .....	3-4
3.5.1    Organic Analytes .....	3-5
3.5.2    Inorganic Analytes.....	3-6
3.5.3    Chemicals of Potential Concern .....	3-7
3.6    Private Production Wells and Springs.....	3-7
3.7    Surface Water Sampling Results .....	3-7
3.8    Temporal Trends in Groundwater Chemical Concentrations.....	3-8
3.9    Groundwater Monitoring Program and the Groundwater Quality Monitoring Network .....	3-11

---

3.9.1	Groundwater Sampling Frequency .....	3-11
3.9.2	Increasing Trend Wells.....	3-11
3.10	Habitat Conservation .....	3-12
Section 4 Summary and Conclusions .....		4-1
4.1	Groundwater Elevation and Gradient .....	4-1
4.2	Surface Water Flow Results .....	4-2
4.3	Surface Water and Storm Water Sampling Results.....	4-2
4.4	Groundwater Sampling Results .....	4-2
4.4.1	Private Production Wells and Springs Sampling Results.....	4-2
4.4.2	Groundwater Sampling Results .....	4-2
Section 5 References .....		5-1

---

## **APPENDICES**

**APPENDIX A - RECENT ENVIRONMENTAL ACTIVITIES AND CONCEPTUAL SITE MODEL**

**APPENDIX B - FIELD DATA SHEETS**

**APPENDIX C - WELL CONSTRUCTION SUMMARY TABLE**

**APPENDIX D - WATER LEVEL HYDROGRAPHS**

**APPENDIX E - CHEMICALS OF POTENTIAL CONCERN TIME-SERIES GRAPHS**

**APPENDIX F - SUMMARY OF CALCULATED HORIZONTAL AND VERTICAL GROUNDWATER GRADIENTS**

**APPENDIX G - VALIDATED ANALYTICAL RESULTS BY METHOD**

**APPENDIX H - LABORATORY DATA PACKAGES**

**APPENDIX I - CONSOLIDATED DATA SUMMARY TABLES**

**APPENDIX J - SUMMARY OF THE MANN-KENDALL AND LINEAR REGRESSION ANALYSES**

---

## LIST OF FIGURES

- Figure 1 Regional Location of Laborde Canyon
- Figure 2 Historical Operational Areas and Site Features
- Figure 3 Surface and Storm-Water Sampling Locations
- Figure 4 Second Quarter 2014 Sampling Locations
- Figure 5 Groundwater Contours for First Groundwater - Second Quarter 2014
- Figure 6 Groundwater Contours for First Groundwater - Third Quarter 2014
- Figure 7 Changes in Groundwater Elevation - Second Quarter 2014
- Figure 8 Changes in Groundwater Elevation - Third Quarter 2014
- Figure 9 1,4-Dioxane Isoconcentration Map ( $\mu\text{g/L}$ ) – Second Quarter 2014
- Figure 10 Trichloroethene (TCE) Isoconcentration Map ( $\mu\text{g/L}$ ) – Second Quarter 2014
- Figure 11 Perchlorate Isoconcentration Map ( $\mu\text{g/L}$ ) – Second Quarter 2014
- Figure 12 Perchlorate Statistical Analysis Summary Results
- Figure 13 TCE Statistical Analysis Summary Results
- Figure 14 1,4-Dioxane Statistical Analysis Summary Results
- Figure 15 RDX Statistical Analysis Summary Results

---

## LIST OF TABLES

Table 1	Groundwater Elevation Data - Second Quarter 2014 and Third Quarter 2014
Table 2	Sampling Schedule and Analysis Method - Second Quarter 2014
Table 3	2014 Water Quality Monitoring Locations and Sampling Frequency
Table 4	Groundwater Elevation Change - Second Quarter 2013 and Third Quarter 2014
Table 5	Summary of Horizontal and Vertical Groundwater Gradients
Table 6	Summary of Validated Detected Organic and Inorganic Analytes - Second Quarter 2014
Table 7	Summary Statistics for Validated Detected Organic and Inorganic Analytes - Second Quarter 2014
Table 8	Groundwater Chemicals of Potential Concern
Table 9	Mann-Kendall Concentration Trend Matrix
Table 10	Summary of Mann-Kendall Trend Analysis of Chemicals of Potential Concern for 2014 Sampled Monitoring Wells
Table 11	Summary of Mann-Kendall Trend Analysis of Chemicals of Potential Concern for 2014 Sampled Surface Water Locations
Table 12	Magnitude of Trends Detected for Chemicals of Potential Concern for 2014 Sampled Surface Water and Spring Locations
Table 13	Historical Trichloroethene Trend Summary in Monitoring Wells
Table 14	Historical Perchlorate Trend Summary in Monitoring Wells
Table 15	Historical 1,4-Dioxane Trend Summary in Monitoring Wells
Table 16	Historical Perchlorate Trend Summary in Surface Water
Table 17	Summary of Increasing Chemicals of Potential Concern Trends – Second Quarter 2014
Table 18	Current Sampling Frequencies by Well Classification
Table 19	Monitoring Well Sampling Schedule and Frequency

---

## ACRONYMS AND ABBREVIATIONS

%/yr	percent change per year with respect to the sample mean
bgs	below ground surface
cis-1,2-DCE	cis-1,2-dichloroethene
COV	coefficient of variation
1,2-DCA	1,2-dichloroethane
1,1 -DCE	1,1-dichloroethene
DO	dissolved oxygen
DWNL	California Department of Public Health drinking water notification level
EC	electrical conductivity
ft/ft	feet per foot
GMP	Groundwater Monitoring Program
GPS	global positioning system
HCP	Habitat Conservation Plan
J	This data validation qualifier means the analyte was positively identified, but the concentration is an estimated value.
LC	lower canyon
MAROS	Monitoring and Remediation Optimization System
MW	monitoring well
MCL	California Department of Public Health maximum contaminant level
MEF	Mt. Eden formation
mg/L	milligrams per liter
MS	matrix spike
MSD	matrix spike duplicate
msl	mean sea level
µg/L	micrograms per liter
µg/L/yr	micrograms per liter per year
NA	not applicable/not available



---

ND	non-detect
NTUs	nephelometric turbidity units
NWS	National Weather Service
ORP	oxidation-reduction potential
PQL	practical quantitation limit
q	This data validation qualifier means the analyte detected was below the PQL.
QAL	Quaternary alluvium
QA/QC	quality assurance/quality control
RCA	Western Riverside County Regional Conservation Authority
RDX	hexahydro-1,3,5-trinitro-1,3,5-triazine
RPD	relative percent difference
RWQCB	Regional Water Quality Control Board
S	Mann-Kendall statistic
STF	San Timoteo formation
TCE	trichloroethene
USEPA	United States Environmental Protection Agency
USFWS	United States Fish and Wildlife Service
VOC	volatile organic compound
WDA	waste discharge area
wMEF	weathered Mt. Eden formation
wSTF	weathered San Timoteo formation

---

## Section 1

# Introduction

On behalf of Lockheed Martin Corporation, Tetra Tech has prepared this Semiannual Groundwater Monitoring Report, which presents the results of the Second Quarter 2014 and Third Quarter 2014 groundwater monitoring activities for the Laborde Canyon (former Lockheed Propulsion Company Beaumont Site 2) Groundwater Monitoring Program. Laborde Canyon is southwest of the City of Beaumont, Riverside County, California (Figure 1). Currently, the site is inactive except for ongoing investigative activities performed under Consent Order HSA 88/89-034, amended January 1, 1991, with the California Department of Toxic Substances Control.

The objectives of this report are to accomplish the following:

- Briefly summarize the site history
- Document the water quality monitoring procedures and results
- Analyze and evaluate the groundwater elevation and water quality monitoring data generated
- Identify groundwater chemicals of potential concern based on the analytes detected at the site.
- Propose changes to the monitoring network and sampling frequencies as necessary to meet the objectives of the overall program

This report is organized into the following sections: (1) Introduction, (2) Summary of Monitoring Activities, (3) Groundwater Monitoring Results, (4) Summary and Conclusions, and (5) References. The conceptual site model for Laborde Canyon is described in Appendix A (Recent Environmental Activities and Conceptual Site Model).

### 1.1 SITE BACKGROUND

The site consists of 2,668 acres of land located southwest of Beaumont, California. The parcels that comprise the site were owned by individuals and the United States government before 1958. Between 1958 and 1960, portions of the site were purchased by the Grand Central Rocket

---

Company and used as a remote test facility for early space and defense program efforts. In 1960, the Lockheed Aircraft Corporation purchased one-half interest in the Grand Central Rocket Company. The Grand Central Rocket Company became a wholly-owned subsidiary of the Lockheed Aircraft Corporation in 1961. The remaining parcels of land that comprise the site were purchased from the United States government between 1961 and 1964. In 1963, the Lockheed Propulsion Company became an operating division of the Lockheed Aircraft Corporation and was responsible for the operation of the site until its closure in 1974. The site was used by the Grand Central Rocket Company and the Lockheed Propulsion Company from 1958 to 1974 for small rocket motor assembly, testing operations, propellant incineration, and minor disposal activities. Ogden Labs is known to have leased portions of the site during the 1970s (Radian Corporation, 1986). In 2007 the property was sold to the County of Riverside, California, which remains the current owner.

In 1989, the California Department of Health Services issued a Consent Order requiring Lockheed Martin Corporation to clean up contamination at the site related to past testing activities (California Department of Health Services, 1989). After reviewing reports on investigative and cleanup activities performed at the site, the California Department of Toxic Substances Control, as a successor agency, issued a no further remedial action letter to Lockheed Martin Corporation in 1993.

Because of regulatory interest in perchlorate and 1,4-dioxane, a groundwater sample was collected from an inactive groundwater production well (identified as W2-3) at the site in January 2003. The sample was analyzed for volatile organic compounds, perchlorate, and 1,4-dioxane to determine the potential presence and concentration of those chemicals in groundwater. The analytical results indicated that volatile organic compounds and 1,4-dioxane were not present at or above their respective method detection limits. However, perchlorate was reported at a concentration of 4,080 micrograms per liter, which exceeded the then-current California Department of Public Health drinking water notification level of 4 micrograms per liter. (In October 2007, the drinking water notification level was replaced by the California Department of Public Health maximum contaminant level of 6 micrograms per liter.) Based on the detection of perchlorate in the groundwater sample collected, the California Department of Toxic Substances Control reopened the site for further assessment in August 2004.

---

Four primary historical operational areas have been identified at the site (Figure 2). Each operational area was used for various activities associated with rocket motor assembly, testing, and propellant incineration. In addition, a waste discharge area has been defined. A brief description of each area follows.

*Historical Operational Area J (Area J) – Final Assembly*

Area J was used from 1970 to 1974 for final assembly and shipment of rocket motors for the Short Range Attack Missile program. Rocket motor casings with solid propellant were transported to Building 250, where final assembly of the rocket motor hardware was conducted. Assembly operations included installation of the nozzle and headcap, pressure check of the motor, installation of electrical systems, and preparations for shipment. During plant closure in 1974, all usable parts of this facility were dismantled, taken off the site, and sold (Radian Corporation, 1986).

*Historical Operational Area K (Area K) – Test Bays and Miscellaneous Facilities*

The primary features in Area K included four test bays with two associated bunkers, conditioning chambers, a centrifuge, and a large earthen structure known as the “Prism.”

Four test bays were present at the site. Initially, only three test bays were known; however, a former employee reported in an interview that a fourth test bay, north of the other three bays, was also used in Area K (Tetra Tech, 2009b). The initial testing activities had a history of explosions that destroyed complete test areas, especially during the period when the Grand Central Rocket Company operated at the site (Radian Corporation, 1986). Although vestiges from three test bays are currently visible at the site, the fourth was reportedly destroyed by such an explosion during testing. After a motor failure occurred, the area surrounding the test bay was reportedly inspected to recover any unburned propellant.

The conditioning chambers were used to examine the effects of extreme temperatures on rocket motors and to meet specification requirements (Radian Corporation, 1986). A centrifuge was located in the northwestern portion of Area K, where rocket motors were tested to determine if the solid propellant would separate from its casing under increased gravitational forces.

---

The Prism was reportedly built between 1984 and 1990, and was used by General Dynamics to test radar (Tetra Tech, 2007b). Details concerning construction of the Prism are not available, but it appears to have been constructed with soils from near the test bays.

#### *Historical Operational Area L (Area L) – Propellant Burn Area*

Solid propellant was reportedly transported to a burn area in Area L and set directly on the ground surface for burning (Radian Corporation, 1986). No pits or trenches were dug as part of the burning process according to the Radian report. No evidence or physical features identify the precise location of burning activities, and previous site investigations (Tetra Tech, 2005 and 2010a) found no evidence of significant contamination in Area L, suggesting that propellant incineration may not have been conducted in this area of the site.

#### *Historical Operational Area M (Area M) – Garbage Disposal Area*

The Area M garbage disposal area was located adjacent to a small creek at the site (Radian Corporation, 1986). Scrap metal, paper, wood, and concrete materials were discarded at the disposal site by the Lockheed Propulsion Company. Hazardous materials, including explosives and propellants, were not disposed of at the disposal site by the Lockheed Propulsion Company, according to employee interviews. However, Ogden Labs, a company that tested valves and explosive items, reportedly used this site for disposal of hazardous waste. In 1972, a Lockheed Safety Technician was exposed to toxic vapors of unsymmetrical dimethyl hydrazine from a pressurized gas container located in the disposal site. To avoid possible exposure risks to occupants, the Lockheed Propulsion Company safety group required Ogden Labs to take measures to remove any potentially hazardous materials at the disposal site. Shortly thereafter, a disposal company was contracted by Ogden Labs to clean up the disposal site (Radian Corporation, 1986).

In March 1993, an excavation was performed to remove the debris from the Area M garbage disposal area. A total of 816 tons of debris was removed and disposed of off-site, and the excavation was backfilled to surrounding grade. Excavation activities were performed under the supervision of the Department of Toxic Substances Control (Radian Corporation, 1993).

#### *Waste Discharge Area*

In 2007, Lockheed Martin Corporation discovered the existence of Santa Ana River Basin Regional Water Pollution Control Board Resolution 62-24, dated September 14, 1962. Resolution 62-24 prescribed requirements for the “discharge of industrial wastes (rocket fuel residuum) to

---

excavated pits.” The discharge area was described as two shallow basins protected by two-foot berms, located in a small canyon on the western side of Laborde Canyon, in the SW quarter of the NW quarter of Section 19, Township 3 South, Range 1 West, San Bernardino Baseline and Meridian. Resolution 62-24 further described the wastes to be discharged as “residue remaining after the manufacturing refuse is burned,” and indicated that the amount of material to be discharged was “approximately 5,000 gallons per year.”

The exact nature of the waste proposed for discharge is not clear from Resolution 62-24. The description of the waste material suggests that the area may have been used for burning propellant; but the description of the quantity of material to be discharged suggests that the waste may have been liquid rather than solid. A 1961 aerial photograph shows the waste discharge area as a large cleared area with roads leading to two circular structures, suggesting that the waste discharge area was in use by 1961 (Tetra Tech, 2009b). Investigation of this area found evidence for perchlorate impacts in both soil and groundwater (Tetra Tech, 2007b and 2008).

Features remaining at the waste discharge area include two roughly circular depressions surrounded by earthen berms, at the location of the circular structures identified in the 1961 aerial photograph.

---

## Section 2

# Summary of Monitoring Activities

Section 2 summarizes the Second Quarter 2014 and Third Quarter 2014 groundwater monitoring activities conducted at the site. The results of these monitoring events are discussed in Section 3.

### 2.1 GROUNDWATER LEVEL MEASUREMENTS

Groundwater level measurements are collected at the site on a quarterly basis from all available wells. Water level measurements were proposed for 71 wells and four piezometers for Second Quarter 2014 and Third Quarter 2014. During Second Quarter 2014, groundwater level measurements were collected from 69 monitoring wells and four piezometers on 1 May 2014. Two monitoring wells, TT-MW2-29A and TT-MW2-43, were found to be dry. During Third Quarter 2014, groundwater level measurements were collected from 68 monitoring wells and four piezometers on 15 August 2014. Three monitoring wells, TT-MW2-29A, TT-MW2-43, and TT-MW2-6S were found to be dry. The groundwater level data are summarized in Table 1. Copies of the field data sheets from the water quality monitoring events are presented in Appendix B. A summary of well construction details is presented in Appendix C.

Precipitation data are collected from the local weather station in Beaumont to correlate observed changes in groundwater levels with local precipitation. During Second Quarter 2014, the Beaumont National Weather Service (NWS) station reported approximately 3.13 inches of precipitation. During Third Quarter 2014, the Beaumont NWS station reported approximately 0.79 inches of precipitation.

### 2.2 SURFACE WATER SAMPLING

Surface water samples are collected at the site during the second and fourth quarter groundwater monitoring events. Surface water sampling locations WS-1, WS-2, and WS-3 are located at a spring approximately 3,700 feet south of the southern site boundary on the Western Riverside

---

County Regional Conservation Authority (RCA) property. Surface water is generally present at one or more of these sampling locations throughout the year. Figure 3 shows the surface water sampling locations.

Storm water samples are collected at the site on an annual basis, usually during the first quarter. Storm water sampling locations SW-01 through SW-07 are located in ephemeral stream beds within Laborde Canyon and major side canyons. Storm water runoff drains to the stream beds during periods of heavy precipitation and flows south through the site and the RCA property to the south of the site, eventually crossing beneath Gilman Hot Springs Road. Water is present in the stream beds only during periods of heavy, prolonged precipitation. Figure 3 shows the storm-water sampling locations.

During the Second Quarter 2014 monitoring event, three surface water sampling locations were proposed for water quality monitoring but were found to be dry and were not sampled. Table 2 lists the locations monitored for the Second Quarter 2014 monitoring event; Figure 4 illustrates the sampling locations. During the Third Quarter 2014 monitoring event, no surface water samples were scheduled to be collected.

## **2.3 GROUNDWATER SAMPLING**

The Groundwater Monitoring Program (GMP) has a quarterly, semiannual, annual, and biennial frequency. Both groundwater and surface water are sampled as part of the GMP. The annual event is the major monitoring event, and the quarterly and semiannual events are smaller, minor events. All new wells are sampled quarterly for one year, after which a frequency for future sampling is proposed based on the well classification (i.e., the purpose of the well). The well classifications from the approved *Groundwater Sampling and Analysis Plan* (Tetra Tech, 2007a) include the following:

- **Horizontal Extent Wells:** Horizontal extent wells are utilized to assess the lateral extent of affected groundwater and the shape of the plume. Horizontal extent wells can be utilized to track plume migration and plume reduction rates as a result of remedial actions.
- **Vertical Distribution Wells:** Vertical distribution wells are utilized to assess the vertical extent of affected groundwater. Vertical distribution wells can also be utilized to track plume migration and plume reduction rates as a result of remedial actions.



- 
- **Increasing Contaminant Trend Wells:** Increasing contaminant trend wells are wells that demonstrate statistically increasing contaminant trends. Increasing contaminant trend wells are utilized to assist in identifying new contaminant sources or areas where the remedial actions are not effective.
  - **Guard Wells:** Guard wells would be utilized to provide an early warning to detect contaminants for the protection of private and municipal wells. Guard wells may also include wells used to monitor off-site contaminant migration.
  - **Background Wells:** Background (or upgradient) wells are utilized to assess the quality of the groundwater that is entering the site.
  - **Remedial Monitoring Wells:** Remedial monitoring wells are utilized to evaluate the effectiveness of remedial activities at the site. Remedial monitoring wells can be used to measure mass removal rates and assess remediation schedules for site cleanup.
  - **New Wells:** New wells are wells that are new to the network or which have been out of the sampling program for an extended period of time.
  - **Redundant Wells:** Redundant wells are wells that provide information that duplicates the data from other functional well classifications. Redundant wells are generally located in the same vicinity as one of the other well classifications. These wells provide no additional technical information and would not be monitored.

The annual monitoring event is performed during the second quarter of each year, and includes sampling of horizontal extent wells, vertical distribution wells, increasing contaminant trend wells, and guard wells. Background wells are also sampled during the annual monitoring event in even-numbered years. The semiannual event is performed during the fourth quarter of each year, and includes sampling of increasing contaminant trend and guard wells only. Quarterly events currently consist of water level measurements only, and are performed during the first and third quarters of each year. A complete list of the surface water and monitoring well locations in the monitoring program can be found in Table 3. The table shows the well classification and the current approved sampling frequency for each well.

The groundwater monitoring schedule is reviewed and modified as necessary annually following the second quarter groundwater monitoring event. Modifications to the sampling schedule are made in accordance with the approved *Groundwater Sampling and Analysis Plan* (Tetra Tech, 2007a). The Second and Third Quarter 2014 sampling events followed the monitoring schedule proposed in the Second and Third Quarter 2013 monitoring report (Tetra Tech, 2013), which was

---

submitted to the California Department of Toxic Substances Control in December 2013, and was approved with no comments to the proposed schedule.

### **2.3.1 Proposed and Actual Well Locations Sampled**

During the Second Quarter 2014 monitoring event, 60 sampling locations (52 groundwater monitoring wells and eight off-site private production wells or springs) were proposed for water quality monitoring. Two monitoring wells, TT-MW2-6S and TT-MW2-29A, and one off-site private spring, PPW-6, were dry and could not be sampled. Therefore, water quality data were collected from 50 monitoring wells and seven private production wells or springs during this event. Table 2 lists the locations monitored for the Second Quarter 2014 monitoring event, analytical methods, sampling dates, and QA/QC samples collected. Figure 4 illustrates the sampling locations for the Second Quarter 2014 monitoring event. During the Third Quarter 2014 monitoring event, no groundwater monitoring wells or off-site private production wells or springs were scheduled to be sampled.

### **2.3.2 Groundwater Sampling Procedures**

Groundwater sampling was performed by low-flow purging and sampling methods, using either dedicated double-valve sampling pumps or a non-dedicated bladder pump, as indicated in Table 2. Water quality field parameters (water level, temperature, pH, EC, turbidity, ORP, and DO) were measured and recorded on field data sheets (Appendix B) during well purging. Collection of water quality parameters started when at least one discharge hose/pump volume had been removed, and purging was considered complete when the above parameters had stabilized, or the well was purged dry. Stabilization of water quality parameters was used as an indication that representative formation water had entered the well and was being purged. The criteria for stabilization of these parameters were as follows: water level  $\pm 0.1$  foot, pH  $\pm 0.1$ , EC  $\pm$  three percent, turbidity  $< 10$  nephelometric turbidity units (NTUs) (if  $> 10$  NTUs  $\pm 10\%$ ), DO  $\pm 0.3$  milligrams per liter (mg/L), and ORP  $\pm 10$  millivolts. Sampling instruments and equipment were maintained, calibrated, and operated in accordance with the manufacturers' specifications, guidelines, and recommendations. If a well was purged dry, the well was sampled with a disposable bailer after sufficient recharge had taken place to allow sample collection.

Groundwater samples were collected in order of decreasing volatilization potential and placed in appropriate containers. A sample identification label was affixed to each container, and sample

---

custody was maintained by chain-of-custody record. Samples collected were chilled and transported via courier to E.S. Babcock & Sons, Inc. or EMAX Laboratories, Inc., state-accredited analytical laboratories, thus maintaining proper temperatures and sample integrity. Trip blanks were collected for the monitoring events to assess potential cross-contamination of water samples while in transit to the laboratory in accordance with the *Programmatic Sampling and Analysis Plan* (Tetra Tech, 2010b). Equipment blanks were collected when sampling with non-dedicated equipment to assess potential cross-contamination of water samples via sampling equipment.

## **2.4 ANALYTICAL DATA QA/QC**

The samples were tested using methods approved by the United States Environmental Protection Agency (USEPA). Since the analytical data were obtained by following USEPA-approved method criteria, the data were evaluated by using the USEPA-approved validation methods described in the National Functional Guidelines (USEPA, 2008 and 2010). The National Functional Guidelines contain instructions on method-required quality control parameters and on how to interpret these parameters to confer validation to environmental data results.

Quality control parameters used in validating data results included holding times, field blanks, laboratory control samples, method blanks, duplicate environmental samples, spiked samples, and surrogate and spike recovery data.

## **2.5 HABITAT CONSERVATION**

All monitoring activities were performed in accordance with the United States Fish and Wildlife Service (USFWS) approved Habitat Conservation Plan (HCP) (USFWS, 2005) and subsequent clarifications (Lockheed Martin Corporation, 2006a and 2006b) to the HCP. Groundwater sampling activities were conducted with light duty vehicles and were supervised by a USFWS-approved biologist, as specified in the Low Effect HCP.

---

## Section 3

# Groundwater Monitoring Results

The results of Second Quarter 2014 and Third Quarter 2014 groundwater monitoring events are presented in the following subsections. These subsections describe tabulated summaries of the groundwater elevation and water quality data, groundwater elevation maps, and figures showing analytical results.

### 3.1 GROUNDWATER ELEVATION AND FLOW

Seventy-one monitoring wells and four piezometers were identified for groundwater level measurements during the Second Quarter 2014 and Third Quarter 2014 monitoring events. During these events, two wells were dry (MW-29A and MW-43). A third well, TT-MW2-6S, was also dry during the Third Quarter 2014 event. A tabulated summary of groundwater depths and elevations is presented in Table 1.

On-site groundwater elevations during the Second Quarter 2014 and Third Quarter 2014 monitoring events ranged from approximately 2,073 feet above mean sea level (msl) at TT-MW2-16, located in the northern portion of the site, to about 1,817 feet above msl at TT-MW2-8, located in the southern portion of the site. Depth to first groundwater ranged from about 121 feet below ground surface (bgs) at TT-MW2-29B to about 20 feet bgs at TT-MW2-8. Groundwater elevation contour maps for wells screened in first groundwater for the Second Quarter 2014 and Third Quarter 2014 are presented in Figures 5 and 6, respectively. Hydrographs for individual wells are provided in Appendix D.

During Second Quarter 2014, the Beaumont National Weather Service (NWS) reported approximately 3.13 inches of precipitation, and the average site-wide groundwater elevation increased approximately 0.11 foot. During Third Quarter 2014, the Beaumont NWS reported approximately 0.79 inches of precipitation and the average site-wide groundwater elevation increased approximately 0.39 feet. Table 4 presents the range and average change in groundwater elevation by area. Figures 7 and 8, respectively, present elevation differences between the First

---

Quarter 2014 and Second Quarter 2014, and between the Second Quarter 2014 and Third Quarter 2014 groundwater monitoring events.

### **3.2 GROUNDWATER GRADIENTS**

Horizontal groundwater gradients are calculated using a segmented path from well to well that approximates the overall site flowline. The horizontal gradient is a measure of the change in the hydraulic head divided by the distance between wells (i.e., the slope of the water table). The average horizontal groundwater gradient calculated between TT-MW2-16 and TT-MW2-6S for the Second Quarter 2014 groundwater monitoring event for the shallow wells screened in the weathered San Timoteo formation (wSTF) was 0.030 feet per foot (ft/ft). TT-MW2-6S was found to be dry during the Third Quarter 2014 monitoring event so the horizontal gradient was calculated between TT-MW2-16 and TT-MW2-5 and was found to be 0.030 feet per foot. The horizontal groundwater gradient calculated between TT-MW2-2 and TT-MW2-6D for deeper wells screened in the San Timoteo formation (STF) was 0.029 ft/ft during the Second Quarter 2014 and Third Quarter 2014 groundwater monitoring events.

Vertical groundwater gradients are calculated from individual clusters of wells. Well clusters measure the differences in static water level at different depths in the aquifer. The vertical gradient is a comparison of static water level between wells at different depths in the aquifer, and is an indication of the vertical head difference (downward—negative gradient, upward—positive gradient) of groundwater. Vertical groundwater gradients at the site are generally downward. The vertical gradients ranged from -0.31 ft/ft at well cluster TT-MW2-4S and 4D located in Area L, to +0.17 ft/ft at well cluster TT-MW2-19S and 19D located on the RCA property to the south of the site. A summary of calculated horizontal and vertical groundwater gradients is presented in Table 5. A complete listing of historical horizontal and vertical groundwater gradients and associated calculations is presented in Appendix E.

### **3.3 SURFACE WATER FLOW**

During the Second Quarter 2014 and Third Quarter 2014, Tetra Tech field personnel walked the Laborde Canyon drainage channel to determine the presence, nature, and quantity of surface water within the creek bed. Surface water was not present within the creek bed during the Second

---

Quarter 2014 and Third Quarter 2014 monitoring events, so stream flow measurements were not taken.

### **3.4 ANALYTICAL DATA SUMMARY**

All groundwater and surface water samples collected during the Second Quarter 2014 monitoring event were analyzed for perchlorate. Select wells were also sampled for volatile organic compounds (VOCs), 1,4-dioxane, and hexahydro-1,3,5-trinitro-1,3,5-triazine (RDX), as indicated in Table 6. Groundwater and surface water samples were not scheduled to be collected during the Third Quarter 2014 monitoring event.

A summary of validated laboratory analytical results for analytes detected above their respective method detection limits during the Second Quarter 2014 monitoring event is presented in Table 6. Analytes with sample results above the published maximum contaminant level (MCL) or drinking water notification level (DWNL) are indicated by bold type in Table 6. Table 7 presents summary statistics for validated organic and inorganic analytes detected during the monitoring event. A complete list of the analytes tested, along with validated sample results by analytical method, is provided in Appendix F. Laboratory analytical data packages, which include all environmental, field quality control (QC), and laboratory QC results, are provided in Appendix G. A consolidated laboratory data summary table is presented in Appendix H.

#### **3.4.1 Data Quality Review**

The quality control samples were reviewed as described in the *Programmatic Sampling and Analysis Plan, Beaumont Sites 1 and 2* (Tetra Tech, 2010b). The data for the groundwater sampling activities were contained in analytical data packages generated by E.S. Babcock & Sons, Inc. and EMAX Laboratories, Inc. These data packages were reviewed using the latest versions of the United States Environmental Protection Agency Contract Laboratory Program National Functional Guidelines for Organic and Inorganic Superfund Data Review (USEPA, 2008 and 2010).

Preservation criteria, holding times, field blanks, laboratory control samples, method blanks, duplicate environmental samples, spiked samples, and surrogate and spike recovery data were reviewed. Within each environmental sample, the sample-specific quality control spike recoveries were examined. These data examinations included comparing statistically calculated control limits

---

to percent recoveries of all spiked analytes and duplicate spiked analytes. Relative percent difference (RPD) control limits were compared to actual spiked (matrix spike/matrix spike duplicate [MS/MSD]) RPD results. Surrogate recoveries were examined for all organic compound analyses and compared to their control limits.

Environmental samples were analyzed by the following methods: Method E332.0 for perchlorate, Method SW8270C SIM for 1,4-dioxane, Method SW8330 for RDX, and Methods SW8260B and E524.2 for VOCs. All data results met required criteria, are of known precision and accuracy, did not require qualification, and may be used as reported.

### **3.5 CHEMICALS OF POTENTIAL CONCERN**

The identification of chemicals of potential concern is an ongoing process that takes place annually as part of the second quarter sampling event, and is reported in the Second and Third Quarter Semiannual Groundwater Monitoring Report. The purpose of identifying chemicals of potential concern is twofold: to establish a list of analytes that best represents the extent and magnitude of affected groundwater, and to focus more detailed analysis on those analytes. The analytes were organized and evaluated in two groups, organic and inorganic, and divided into primary and secondary chemicals of potential concern. Table 6 presents a summary of the validated organic and inorganic analytes detected during the Second Quarter 2014 monitoring event.

The identification process for chemicals of potential concern does not eliminate analytes from testing, but does reduce the number of analytes that are evaluated and discussed during reporting. All of the secondary chemicals of potential concern will continue to be tested during future monitoring events because of their association with other analytes that are listed as primary chemicals of potential concern. However, they are not discussed further because they are detected on a more limited or inconsistent basis, and/or are detected at concentrations below a regulatory threshold. The standard list of analytes for each method will continue to be tested and screened annually to ensure that the appropriate chemicals of potential concern are being identified and evaluated. Table 8 presents a summary of the Laborde Canyon chemicals of potential concern. Time-series graphs of perchlorate and trichloroethene (TCE) concentrations are provided in Appendix I.

---

### **3.5.1 Organic Analytes**

Seven organic analytes (RDX, benzene, 1,4-dioxane, 1,2-dichloroethane [1,2-DCA], 1,1-dichloroethene [1,1-DCE], cis-1,2-dichloroethene [cis-1,2-DCE], and TCE) were detected above their respective MCL or DWNL during the Second Quarter 2014 monitoring event.

RDX was detected above the DWNL of 0.3 micrograms per liter (µg/L) in the groundwater sample collected from monitoring well TT-MW2-13 during the Second Quarter 2014 monitoring event, at a concentration of 0.41 µg/L. Monitoring well TT-MW2-13 is located in Area K.

Benzene was reported below the MCL of 1 µg/L in groundwater samples collected from three monitoring wells (TT-MW2-22, TT-MW2-24, and TT-MW2-37A) located in the former waste discharge area (WDA) at concentrations of 0.82 µg/L, 0.15 µg/L, and 0.28 µg/L, respectively. In monitoring well TT-MW2-40B, located in Area K, benzene was reported above the MCL at a concentration of 1.8 µg/L during the Second Quarter 2014 monitoring event.

1,4-Dioxane was reported below the DWNL of 1 µg/L in groundwater samples collected from three monitoring wells (TT-MW2-5, TT-MW2-7, and TT-MW2-8) during the Second Quarter 2014 monitoring event, at concentrations ranging from 0.12 µg/L to 0.43 µg/L; and was reported above the DWNL in groundwater samples collected from six monitoring wells (TT-MW2-9S, TT-MW2-22, TT-MW2-24, TT-MW2-27, TT-MW2-37A and TT-MW2-37B) during the Second Quarter 2014 monitoring event, at concentrations ranging from 1.1 to 170 µg/L. All wells with 1,4-dioxane detections are located within or downgradient from the former WDA. Time-series graphs of 1,4-dioxane are provided in Appendix I

1,2-DCA was reported below the MCL of 0.5 µg/L in the groundwater sample collected from monitoring well TT-MW2-24 during the Second Quarter 2014 monitoring event, at a concentration of 0.42 µg/L; and was reported above the MCL in the groundwater sample collected from monitoring well TT-MW2-22 during the Second Quarter 2014 monitoring event, at a concentration of 0.95 µg/L. Both of these wells are located in the former WDA.

1,1-DCE was reported below the MCL of 6 µg/L in the groundwater samples collected from wells TT-MW2-24 and TT-MW2-37A during the Second Quarter 2014 monitoring event, at concentrations of 2.2 and 0.31 µg/L, respectively; and was reported above the MCL in the



---

groundwater sample collected from monitoring well TT-MW2-22 during the Second Quarter 2014 monitoring event, at a concentration of 16 µg/L. All of these wells are located in the former WDA.

cis-1,2-Dichloroethene was reported below the MCL of 6 µg/L in the groundwater sample collected from monitoring well TT-MW2-11 during Second Quarter 2014 monitoring event, at a concentration of 0.24 µg/L; and was reported above the MCL in well TT-MW2-22 during the Second Quarter 2014 monitoring event, at a concentration of 12 µg/L. Monitoring well TT-MW2-11 is located in Area M, and monitoring well TT-MW2-22 is located in the former WDA.

TCE was reported below the MCL of 5 µg/L in groundwater samples collected from two monitoring wells (TT-MW2-9S and TT-MW2-21) located in, or just downgradient from, the former WDA during the Second Quarter 2014 monitoring event at concentrations ranging from 1.6 to 3.5 µg/L. TCE was reported at or above the MCL in groundwater samples collected from three groundwater monitoring wells (TT-MW2-22, TT-MW2-24, and TT-MW2-37A) located in, or just downgradient from, the former WDA during the Second Quarter 2014 monitoring event at concentrations ranging from 5.8 µg/L to 490 µg/L. TCE was also detected above the MCL in monitoring well TT-MW2-11, located in Area M, at a concentration of 7.5 µg/L; and below the MCL in monitoring wells TT-MW2-17S and TT-MW2-17D, located in Area K, at concentrations of 0.46 µg/L and 4.9 µg/L, respectively. Time-series graphs of TCE are provided in Appendix I.

Other organic analytes detected at low levels during the Second Quarter 2014 groundwater monitoring event were acetone, 2-butanone, carbon disulfide, chloroform, 1,1-dichloroethane, trans-1,2-dichloroethene, methylene chloride, toluene, and 1,1,2-trichloroethane. None of these compounds exceeded their MCL or DWNL, and generally they are not detected consistently from event to event.

### **3.5.2 Inorganic Analytes**

One inorganic analyte (perchlorate) was detected in groundwater above a published MCL or DWNL. Table 6 presents a summary of validated inorganic analyte concentrations reported in groundwater samples collected during the Second Quarter 2014 groundwater monitoring event.

Perchlorate was reported below the MCL of 6 µg/L in groundwater samples collected from 9 of the 49 monitoring wells sampled during the Second Quarter 2014; and was reported above the MCL in groundwater samples collected from 24 of the 49 monitoring wells sampled during the

---

Second Quarter 2014. The highest perchlorate concentrations during the Second Quarter 2014 were found at monitoring well TT-MW2-38A (110,000 µg/L), located in Test Bay 3 in Area K; and in monitoring well TT-MW2-24 (120,000 µg/L), located in the former WDA. Time-series graphs of perchlorate are provided in Appendix I.

### **3.5.3 Chemicals of Potential Concern**

Given the analysis above and the concentrations detected during previous groundwater monitoring events, perchlorate, TCE, and 1,4-dioxane are identified as primary chemicals of potential concern, and benzene, 1,2-DCA, 1,1-DCE, cis-1,2-DCE, and RDX are identified as secondary chemicals of potential concern at the site. The remaining eight organic analytes were detected below their respective MCL or DWNL. Their distribution and concentrations in groundwater will continue to be monitored and the results evaluated. Figures 9 and 10, and 11 present isoconcentration maps for 1,4-dioxane, TCE, and perchlorate for groundwater samples collected during the Second Quarter 2014 monitoring event.

## **3.6 PRIVATE PRODUCTION WELLS AND SPRINGS**

Five off-site private production wells and three off-site springs were scheduled to be sampled for perchlorate by USEPA Method E332.0, 1,4-dioxane by USEPA Method SW8270C SIM, and VOCs by USEPA Method E524.2 during the Second Quarter 2014 sampling event (Table 2). One spring was not sampled because it was dry. The five production wells and two remaining springs were sampled between 5 May and 8 May 2014. No chemicals of potential concern were detected in any of the off-site private production well or spring samples during the Second Quarter 2014 sampling event.

## **3.7 SURFACE WATER SAMPLING RESULTS**

Surface water sampling locations were dry during the Second Quarter 2014 sampling event so samples were not collected. No other surface water samples were scheduled to be collected during this reporting period.

---

### **3.8 TEMPORAL TRENDS IN GROUNDWATER CHEMICAL CONCENTRATIONS**

All groundwater and surface water monitoring locations sampled and tested between Fourth Quarter 2013 and Third Quarter 2014 were included in the trend analyses. Samples were collected from 49 monitoring wells and three fixed surface water locations. Temporal trend analyses were performed for perchlorate, TCE, 1,4-dioxane, and RDX. The temporal trend analyses were performed using data from the entire period of record (September 2004 through September 2014) to evaluate long-term trends at the site, and to assess the variability observed in the data, since many locations fluctuate considerably from quarter to quarter.

Time trend analysis was conducted using the Monitoring and Remediation Optimization System (MAROS) developed by the Air Force Center for Environmental Excellence (AFCEE, 2006). MAROS is a statistical database application developed to assist with groundwater quality data trend analysis and long-term monitoring optimization at contaminated groundwater sites. The software performs parametric and nonparametric trend analyses to evaluate temporal and spatial contaminant trends using Mann-Kendall and linear regression methods. Brief descriptions of the methods follow.

- **Mann-Kendall Analysis** – This statistical procedure was used to evaluate the data for trends. It is a nonparametric statistical procedure that is well suited for analyzing trends in data over time that do not require assumptions as to the statistical distribution of the data and can be used with irregular sampling intervals and missing data. The Mann-Kendall test for trends is suitable for analyzing data that follow a normal or non-normal distribution pattern. The advantage with this approach involves cases where outliers in the data would produce biased estimates of the least squares estimated slope.
- **Linear Regression Analysis** – This statistical procedure was used to estimate the magnitude of the trends. A parametric statistical procedure is typically used for analyzing trends in data over time and requires a normal statistical distribution of the data.

The following seven statistical concentration trend types are derived from Mann-Kendall analysis: (1) decreasing, (2) increasing, (3) no trend (displaying two sets of conditions), (4) probably decreasing, (5) probably increasing, (6) stable, and (7) non-detect (with all sample results below the detection limit). If a location has fewer than four quarters of data, then the Mann-Kendall analysis cannot be run, and not applicable (NA) is applied to the results. The criteria used to evaluate the statistical concentration trend types are summarized in Table 9.

---

The Mann-Kendall statistic (S) measures the trend in the data. Positive values indicate an increase in constituent concentrations over time, whereas negative values indicate a decrease in constituent concentrations over time. The strength of the trend is proportional to the magnitude of the Mann-Kendall statistic (i.e., large magnitudes indicate a strong trend).

The coefficient of variation (COV) is a statistical measure of how the individual data points vary about the mean value. Values less than or near 1.00 indicate that the data form a relatively close group about the mean value. Values larger than 1.00 indicate that the data show a greater degree of scatter about the mean.

The confidence in trend is the statistical confidence that the constituent concentration is increasing ( $S > 0$ ) or decreasing ( $S < 0$ ).

Temporal trends were analyzed for up to four analytes in 49 monitoring wells and three surface water or spring sampling locations. Any single location may have different trends for each of the four analytes evaluated. The results of the Mann-Kendall trend analysis are provided in Appendix J; summaries of the Mann-Kendall results are presented in Table 10 (groundwater) and Table 11 (surface water).

Twenty-two probably increasing or increasing trends were found at 16 groundwater monitoring locations. Listed below are the areas of the site where they are located, the location identifications, the chemical of potential concern that has the increasing or probably increasing trend, the Second Quarter 2014 analytical results, and the magnitude of the trend in percent per year (%/yr).

Eight wells located in Area K:

- TT-MW2-1: perchlorate (18,000 µg/L, 5.5 %/yr)
- TT-MW2-13: perchlorate (3,900 µg/L, 2.2 %/yr)
- TT-MW2-17S: TCE (0.46 µg/L, 12 %/yr)
- TT-MW2-17D: TCE (4.9 µg/L, 16 %/yr)
- TT-MW2-30B: perchlorate (9,500 µg/L, 26 %/yr)
- TT-MW2-33A: perchlorate (0.78 µg/L, 20 %/yr)
- TT-MW2-34A: perchlorate (11 µg/L, 37 %/yr)

- 
- TT-MW2-40A: perchlorate (0.72 µg/L, 44 %/yr)

One well located in Area L:

- TT-MW2-4S: perchlorate (0.72 µg/L, 6.6 %/yr)

One well located in Area M:

- TT-MW2-11: TCE (7.5 µg/L, 1.4 %/yr)

Four wells located in the former WDA:

- TT-MW2-21: perchlorate (20 µg/L, 42 %/yr) and TCE (3.5 µg/L, 22 %/yr)
- TT-MW2-22: TCE (490 µg/L, 11 %/yr) and 1,4-dioxane (81 µg/L, 7.3 %/yr)
- TT-MW2-37A: perchlorate (16,000 µg/L, 33 %/yr), TCE (5.8 µg/L, 31 %/yr), and 1,4-dioxane (20 µg/L, 13 %/yr)
- TT-MW2-37B: perchlorate (190 µg/L, 58 %/yr)

Two wells located just downgradient and cross gradient, respectively, of the former WDA:

- TT-MW2-9S: perchlorate (19,000 µg/L, 35 %/yr), TCE (1.6 µg/L, 24 %/yr), and 1,4-dioxane (20 µg/L, 13 %/yr)
- TT-MW2-27: perchlorate (580 µg/L, 20 %/yr)

Three surface water locations, SW-03, SW-07, and WS-01, were evaluated for perchlorate trends. The three locations were found to have “no trend.” No other surface water trends or locations were evaluated.

Table 12 summarizes the magnitude of the trend changes in micrograms per liter per year (µg/L/yr) and the percent change with respect to the mean experienced at the site through Third Quarter 2014. The trends and trend magnitudes were generated using the MAROS software. Figures 12 through 15 present a spatial representation of the results of the trend analysis for monitoring well locations. Tables 13 to 16 summarize historical trend analysis results by chemical, and Table 17 provides a summary of increasing trends identified during the Second Quarter 2014 trend analysis by well.

---

### **3.9 GROUNDWATER MONITORING PROGRAM AND THE GROUNDWATER QUALITY MONITORING NETWORK**

Quarterly groundwater monitoring has been conducted continuously at the site since the September 2004 well installation activities. Groundwater samples have been routinely analyzed for volatile organic compounds and perchlorate. Selected testing for California Assessment Manual 17 Metals, general minerals, 1,4-dioxane, RDX, N-nitrosodimethylamine, 1,2,3-trichloropropane, and hexavalent chromium has also been performed. In accordance with the site *Groundwater Sampling and Analysis Plan* (Tetra Tech, 2007a), the analytical scheme and the classifications of the wells in the network and the corresponding sampling frequency are evaluated annually during the second quarter of each year. Changes may then be proposed to accommodate expanded site knowledge or changing site conditions.

#### **3.9.1 Groundwater Sampling Frequency**

The primary criterion used in determining the sampling frequency of a monitoring well is the well classification (i.e., function of each well) (Tetra Tech, 2007a). Classification of groundwater monitoring wells is based on the evaluation of the temporal trends, spatial distribution analyses, and other qualitative criteria. During the current reporting period, horizontal extent wells, vertical distribution wells, increasing contaminant trend wells, and guard wells were sampled. Table 18 presents a summary of the current frequency of groundwater sampling by well classification.

#### **3.9.2 Increasing Trend Wells**

The sampling frequency for wells with an increasing trend may be increased if the magnitude of the trend and the location of the well warrant an increased frequency. Regardless of the outcome of the trend analysis, guard wells will continue to be sampled semiannually. The monitoring frequency for wells exhibiting an increasing trend is evaluated on a case-by-case basis, with particular attention given to the magnitude of the trend and the location of the well.

For the Second Quarter 2014 trend analysis, seven of the 16 locations with increasing or probably increasing trends for perchlorate, 1,4-dioxane, or TCE had trend magnitudes of less than 20% per year. The seven locations with these low magnitude trends are considered to be less critical than the nine locations with magnitudes greater than 20% per year. Only those wells with trend magnitudes greater than 20% per year are considered to be increasing trend wells for well classification purposes.

---

Taking into account the results of the temporal trend analysis and the magnitude of their trends, Tetra Tech proposes to continue semiannual sampling for the following increasing trend wells:

- Area K wells TT-MW2-30B, TT-MW2-34A, and TT-MW2-40A
- Waste discharge area wells TT-MW2-21, TT-MW2-37A, and TT-MW2-37B
- Lower Canyon Area wells TT-MW2-9S and TT-MW2-27

Additionally it is proposed to reclassify the following monitoring well as an increasing trend well, and change its sampling frequency from annual to semiannual:

- Area K well TT-MW2-33A

We propose that the sampling frequency of the following monitoring well be changed from semiannual to annual, based on the limited magnitude of its trend:

- Waste discharge area well TT-MW2-38C (vertical)

Table 19 summarizes the proposed monitoring well sampling schedule and frequency for the 2015 calendar year.

### **3.10 HABITAT CONSERVATION**

Consistent with the United States Fish and Wildlife Service (USFWS) approved Habitat Conservation Plan (HCP) (USFWS, 2005) and subsequent clarifications (Lockheed Martin Corporation, 2006a and 2006b) to the HCP describing activities for environmental remediation at the site, field activities were performed under the supervision of a USFWS-approved biologist. No impact to the Stephens' Kangaroo rat occurred during the performance of field activities related to the Second Quarter 2014 and Third Quarter 2014 monitoring events.

---

## Section 4

# Summary and Conclusions

This section summarizes the results of the Second Quarter 2014 and Third Quarter 2014 groundwater monitoring events.

### 4.1 GROUNDWATER ELEVATION AND GRADIENT

Taking into account the measured groundwater elevations, the current conceptual site model, and the southward sloping topography at the site, groundwater flow is to the south, generally following the topography of Laborde Canyon. During Second Quarter 2014, groundwater elevation decreases were seen in Area M (garbage disposal area) and groundwater elevation increases were seen in all other areas. During Third Quarter 2014, groundwater elevation increases were seen in all areas of the site. The overall groundwater elevation at the site has decreased since Fourth Quarter 2005, with the greatest decrease over time seen in monitoring well TT-MW2-1 (8.75 feet). Limited seasonal fluctuations can be seen to varying degrees following periods of precipitation. Although the data are limited in many of the newer wells, the overall long-term decreasing trend in groundwater elevation appears to generally correspond to long-term precipitation patterns.

The horizontal hydraulic gradients calculated between TT-MW2-16 and TT-MW2-6S from the Second Quarter 2014 groundwater monitoring event for the weathered San Timoteo formation-screened wells averaged 0.030 feet/foot (ft/ft). During the Third Quarter 2014 monitoring event TT-MW2-6S was found to be dry. The horizontal gradient was calculated between TT-MW2-16 and TT-MW2-5 and was estimated to be 0.030 feet/foot. The horizontal groundwater gradients calculated between TT-MW2-2 and TT-MW2-6D for the Second Quarter 2014 and Third Quarter 2014 groundwater monitoring events for the deeper San Timoteo formation-screened wells averaged 0.029 ft/ft. Vertical gradients are generally downward on-site and upward from the site boundary south. The vertical gradients range from -0.30 ft/ft to +0.17 ft/ft. A summary of calculated horizontal and vertical groundwater gradients is presented in Table 5 and in Appendix E.



---

## 4.2 SURFACE WATER FLOW RESULTS

Surface water was not present in the stream beds during the Second Quarter 2014 and Third Quarter 2014 monitoring events.

## 4.3 SURFACE WATER AND STORM WATER SAMPLING RESULTS

During the Second Quarter 2014 sampling event, all surface water locations were dry so no samples were collected. No other surface water or storm water samples were collected during this reporting period.

## 4.4 GROUNDWATER SAMPLING RESULTS

### 4.4.1 Private Production Wells and Springs Sampling Results

Samples from select off-site private production wells and springs were collected as part of the Second Quarter 2014 monitoring event. No chemicals of potential concern were detected in the private production wells or springs. The private production wells and springs will continue to be monitored annually during the second quarter sampling event.

### 4.4.2 Groundwater Sampling Results

#### Area J – Final Assembly

Results for Area J during the Second Quarter 2014 include the following:

- Site chemicals of potential concern have not been detected above their respective maximum contaminant level or drinking water notification level in Area J. During Second Quarter 2014, perchlorate was detected in monitoring well TT-MW2-16 at a concentration of 3.6 micrograms per liter (µg/L). Previously, perchlorate was detected at concentrations up to 4.94 µg/L in TT-MW2-16. The source of the perchlorate has been investigated but remains unknown.

#### Area K – Test Bays and Miscellaneous Facilities

Results for Area K during the Second Quarter 2014 include the following:

- Perchlorate was detected at concentrations ranging from below the method detection limit to 110,000 µg/L in TT-MW2-38A. Previously, perchlorate was detected as high as 190,000 µg/L in Area K. Area K has been identified as a source of perchlorate in groundwater.
- Trichloroethene was detected below the maximum contaminant level of 5 µg/L in two wells: TT-MW2-17D (4.9 µg/L) and TT-MW2-17S (0.46 µg/L). Trichloroethene has been detected consistently in well TT-MW2-17D at concentrations up to 6.0 µg/L.

---

Trichloroethene has not been detected in other wells located in Area K. The source of the trichloroethene is unknown.

- Hexahydro-1,3,5-trinitro-1,3,5-triazine was detected at a concentration of 0.41 µg/L in TT-MW2-13. Previously, hexahydro-1,3,5-trinitro-1,3,5-triazine was also detected in monitoring well TT-MW2-1, but has not been detected in this well since October 2007. The source of the hexahydro-1,3,5-trinitro-1,3,5-triazine has been investigated but remains unknown (Tetra Tech, 2010a).

#### Area L – Propellant Burn Area

Results for Area L for the Second Quarter 2014 include the following:

- Perchlorate was detected in monitoring wells TT-MW2-4S and TT-MW2-12 at concentrations of 0.72 µg/L and 0.28 µg/L, respectively. Previously, perchlorate was detected at concentrations up to 9.98 µg/L in Area L. There is no indication that a perchlorate source is present in Area L; the perchlorate detected in the northernmost portion of Area L appears to have originated upgradient in Area K.

#### Area M - Garbage Disposal Area

Results for Area M for the Second Quarter 2014 include the following:

- Perchlorate was detected in monitoring well TT-MW2-11 and TT-MW2-28 at concentrations of 320 µg/L and 0.63 µg/L, respectively. Previously, perchlorate was detected at concentrations up to 469 µg/L in monitoring well TT-MW2-11. Area M has been identified as a source of perchlorate in groundwater.
- Trichloroethene was detected in one well (TT-MW2-11) at a concentration of 7.5 µg/L. The maximum contaminant level for trichloroethene is 5 µg/L. Previously, trichloroethene has been detected in groundwater at concentrations up to 9.2 µg/L. Trichloroethene has not been detected in other wells in Area M.

#### Waste Discharge Area

Results for the former waste discharge area during the Second Quarter 2014 include the following:

- Perchlorate was detected in groundwater at concentrations ranging from below the method detection limit to 120,000 µg/L in well TT-MW2-24. The maximum contaminant level for perchlorate is 6 µg/L. Previously, perchlorate was detected at concentrations as high as 190,000 µg/L in well TT-MW2-24. The former waste discharge area has been identified as a source of perchlorate in groundwater.
- Trichloroethene was detected in groundwater at concentrations ranging from below the method detection limit to 490 µg/L in well TT-MW2-22. The maximum contaminant level for trichloroethene is 5 µg/L. Previously, trichloroethene was detected at concentrations as high as 470 µg/L in the former waste discharge area. This area has been identified as a

---

source of trichloroethene in groundwater; however, trichloroethene has not been detected above the maximum contaminant level of 5 µg/L in downgradient monitoring wells.

- 1,4-Dioxane was detected in groundwater at concentrations ranging from below the method detection limit to 170 µg/L in well TT-MW2-24. The drinking water notification level for 1,4-dioxane is 1 µg/L. Previously, 1,4-dioxane was detected as high as 420 µg/L in the former waste discharge area. This area has been identified as a source of 1,4-dioxane in groundwater, and this constituent has been detected in monitoring wells downgradient of the former waste discharge area.
- Hexahydro-1,3,5-trinitro-1,3,5-triazine was not detected above the method detection limit of 0.25 µg/L in TT-MW2-24. Previously, hexahydro-1,3,5-trinitro-1,3,5-triazine was reported in groundwater samples from monitoring well TT-MW2-24 at concentrations as high as 5.9 µg/L. Hexahydro-1,3,5-trinitro-1,3,5-triazine has not been detected in other wells located in, or downgradient of, the former waste discharge area.

#### Lower Canyon and Riparian Corridor

Results for the lower portion of Laborde Canyon, from the area immediately downgradient of the former waste discharge area to the riparian area immediately south of the property boundary, include the following:

- Perchlorate was detected in groundwater during the Second Quarter 2014 at concentrations ranging from 19,000 µg/L in the northern portion of the lower Laborde Canyon to below the method detection limit in the riparian corridor. Historically, perchlorate has been detected at concentrations up to 17,000 µg/L immediately downgradient from the former waste discharge area, up to 570 µg/L at the southern site boundary, and up to 0.18 µg/L in the riparian corridor south of the southern site boundary. No source of perchlorate has been identified in the lower canyon or at the southern site boundary. The perchlorate appears to have originated in the former waste discharge area.
- Trichloroethene was detected in groundwater during the Second Quarter 2014 in monitoring well TT-MW2-9S, located in the northern portion of the lower Laborde Canyon, at a concentration of 1.6 µg/L, which is below the maximum contaminant level of 5 µg/L. Trichloroethene has not been detected in other wells located in the lower canyon or riparian corridor area. The source of the trichloroethene appears to be the former waste discharge area.
- 1,4-Dioxane was detected in groundwater during the Second Quarter 2014 monitoring event at concentrations ranging from 20 µg/L in the northern portion of the lower Laborde Canyon to below the method detection limit in the riparian corridor. No source of 1,4-dioxane has been identified in the lower canyon or at the southern site boundary. The 1,4-dioxane appears to have originated in the former waste discharge area.

#### Regional Conservation Authority Property

- Perchlorate was detected in monitoring well TT-MW2-19S at a concentration of 4.5 µg/L. This result is consistent with historic results. Perchlorate has not been detected in

---

monitoring wells TT-MW2-20S or TT-MW2-20D, located approximately one-half mile south of TT-MW2-19S.

Summary

Given the data available at this time, the trichloroethene and hexachloro-1,3,5-trinitro-1,3,5-triazine plumes in groundwater appear to be small and isolated. These plumes do not extend off-site. The 1,4-dioxane plume is limited to the former waste discharge area and lower Laborde Canyon, and does not appear to extend off-site. The perchlorate plume appears to extend off-site, terminating in the riparian corridor south of the southern site boundary. The perchlorate detected in monitoring well TT-MW2-19S located on the Regional Conservation Authority property to the south of the site appears to be an isolated impacted area.

Table 19 summarizes the proposed monitoring well sampling schedule and frequency for the 2015 calendar year. Changes include increasing the sampling frequency for well TT-MW2-34 from annual to semiannual based on increasing concentration trend; and decreasing the sampling frequency for well TT-MW2-38C based on the limited magnitude of the observed trend.

Table 19 summarizes the proposed monitoring well sampling schedule and frequency for the 2015 calendar year.

---

## Section 5

# References

1. Air Force Center for Environmental Excellence (AFCEE), 2006. Monitoring and Remediation Optimization System (MAROS) Software Version 2.2 User's Guide, March.
2. California Department of Health Services, 1989. *Lockheed Beaumont Consent Order*, June 16.
3. Hillwig–Goodrow, LLC, 2004. *Lockheed Site 2 Boundary Survey, Lockheed Martin Corporation, Beaumont Site 2, Beaumont, California*, May.
4. Lockheed Martin Corporation, 2006a. *Clarification of Effects on Stephens' Kangaroo Rat from Characterization Activities at Beaumont Site 1 (Potrero Creek) and Site 2 (Laborde Canyon)*, August 3.
5. Lockheed Martin Corporation, 2006b. *Clarification of Mapping Activities Proposed under the Low-Effect Habitat Conservation Plan for the Federally-Endangered Stephens' Kangaroo Rat at Beaumont Site 1 (Potrero Creek) and Site 2 (Laborde Canyon) Riverside County, California (mapping methodology included)*, December 8.
6. Radian Corporation, 1986. *Lockheed Propulsion Company Beaumont Test Facilities Historical Report*, September.
7. Radian Corporation, 1993. *Disposal Area Removal Action, Lockheed Propulsion Company, Beaumont No. 2 Site*, June.
8. Tetra Tech, 2005. *Lockheed Martin Third Quarter 2005 Groundwater Monitoring Report Beaumont Site 2, Beaumont, California*, December.
9. Tetra Tech, 2007a. *Groundwater Sampling and Analysis Plan, Lockheed Martin Corporation, Beaumont Site 2, Beaumont, California*, May.
10. Tetra Tech, 2007b. *Site Investigation Report for Soil Investigations at the Earthen Prism Shaped Structure and Possible Liquid Waste Discharge Ponds at Lockheed Martin Beaumont Site 2*, October.
11. Tetra Tech, 2008. *Supplemental Site Characterization Report, Former Waste Discharge Ponds and Southern Property Boundary, Beaumont Site 2, Beaumont, California*, July.
12. Tetra Tech, 2009a. *Structural Analysis Laborde Canyon (Lineament Study), Appendix L, Semiannual Groundwater Monitoring Report Second Quarter and Third Quarter 2009, Beaumont Site 2, Beaumont, California*, July.
13. Tetra Tech, 2009b. *Historical Research Summary Report, Potential Munitions and Explosives of Concern (MEC) Issues, Lockheed Martin Corporation, Beaumont Site 2 and the Gateway Property, Beaumont, California*, January.

- 
14. Tetra Tech, 2010a. *Dynamic Site Investigation and Summary Remedial Investigation Report, Beaumont Site 2, Beaumont, California*, April.
  15. Tetra Tech, 2010b. *Programmatic Sampling and Analysis Plan, Lockheed Martin Corporation, Beaumont Sites 1 & 2, Beaumont, California*, September.
  16. Tetra Tech, 2013. *Semiannual Groundwater Monitoring Report Second Quarter and Third Quarter 2013, Laborde Canyon (Lockheed Martin Beaumont Site 2), Beaumont, California*, December.
  17. United States Fish and Wildlife Service (USFWS), 2005. *Endangered Species Act Incidental Take Permit for Potrero Creek and Laborde Canyon Properties Habitat Conservation Plan*, October 14.
  18. United States Environmental Protection Agency, USEPA 1997. *Volunteer Stream Monitoring: A Methods Manual*, EPA 841-B-97-003, November.
  19. United States Environmental Protection Agency, USEPA, 2008. *Contract Laboratory Program National Functional Guidelines for Superfund Organic Methods Data Review*, OSWER 9240.1-48, EPA-540-R-08-01, June.
  20. United States Environmental Protection Agency, USEPA, 2010. *Contract Laboratory Program National Functional Guidelines for Inorganic Superfund Data Review*, OSWER 9240.1-51, EPA-540-R-10-011, January.

---

## **TABLES**

**Table 1**  
**Groundwater Elevation Data - Second Quarter 2014 and Third Quarter 2014**

Well ID	TOC Elevation (feet msl)	Second Quarter 2014				Third Quarter 2014			
		Date Measured	Depth to Water (feet BTOC)	Groundwater Elevation (feet msl)	Elevation Change <sup>1</sup> (feet)	Date Measured	Depth to Water (feet BTOC)	Groundwater Elevation (feet msl)	Elevation Change <sup>1</sup> (feet)
TT-EW2-1	1840.24	04/30/14	23.33	1816.91	0.03	08/15/14	24.54	1815.70	1.21
TT-EW2-2	2079.12	05/01/14	61.21	2017.91	0.16	08/15/14	61.35	2017.77	0.14
TT-EW2-3	1962.82	05/01/14	53.46	1909.36	0.04	08/15/14	53.55	1909.27	0.09
TT-MW2-1	2035.21	05/01/14	61.10	1974.11	0.23	08/15/14	61.43	1973.78	0.33
TT-MW2-2	2137.75	05/01/14	71.55	2066.20	0.05	08/15/14	71.67	2066.08	0.12
TT-MW2-3	2094.66	05/01/14	71.20	2023.46	0.15	08/15/14	71.31	2023.35	0.11
TT-MW2-4S	1986.94	05/01/14	51.48	1935.46	-0.01	08/15/14	51.74	1935.20	0.26
TT-MW2-4D	1987.17	05/01/14	59.33	1927.84	-0.02	08/15/14	59.76	1927.41	0.43
TT-MW2-5	1911.31	05/01/14	41.35	1869.96	0.09	08/15/14	41.56	1869.75	0.21
TT-MW2-6S	1908.00	05/01/14	38.11	1869.89	0.09	08/15/14	Dry	Dry	NA
TT-MW2-6D	1908.07	05/01/14	39.06	1869.01	0.07	08/15/14	39.30	1868.77	0.24
TT-MW2-7	1839.25	05/01/14	23.20	1816.05	0.28	08/15/14	24.83	1814.42	1.63
TT-MW2-7D	1838.96	05/01/14	20.18	1818.78	0.01	08/15/14	21.46	1817.50	1.28
TT-MW2-8	1836.32	05/01/14	19.12	1817.20	-0.03	08/15/14	20.34	1815.98	1.22
TT-MW2-9S	1938.38	05/01/14	42.65	1895.73	0.09	08/15/14	42.91	1895.47	0.26
TT-MW2-9D	1938.78	05/01/14	45.74	1893.04	0.15	08/15/14	46.05	1892.73	0.31
TT-MW2-10	2001.57	05/01/14	58.15	1943.42	-0.01	08/15/14	58.33	1943.24	0.18
TT-MW2-11	2004.51	05/01/14	50.40	1954.11	0.03	08/15/14	50.83	1953.68	0.43
TT-MW2-12	2016.26	05/01/14	52.20	1964.06	0.11	08/15/14	52.52	1963.74	0.32
TT-MW2-13	2049.39	05/01/14	66.91	1982.48	0.01	08/15/14	66.93	1982.46	0.02
TT-MW2-14	2074.78	05/01/14	67.46	2007.32	0.18	08/15/14	67.64	2007.14	0.18
TT-MW2-16	2137.20	05/01/14	64.18	2073.02	0.16	08/15/14	64.32	2072.88	0.14
TT-MW2-17S	2095.55	05/01/14	71.88	2023.67	0.16	08/15/14	71.97	2023.58	0.09
TT-MW2-17D	2095.33	05/01/14	72.18	2023.15	0.15	08/15/14	72.30	2023.03	0.12
TT-MW2-18	2035.32	05/01/14	60.82	1974.50	0.21	08/15/14	61.15	1974.17	0.33
TT-MW2-19S	1698.18	05/01/14	45.65	1652.53	0.01	08/15/14	45.91	1652.27	0.26
TT-MW2-19D	1698.15	05/01/14	26.66	1671.49	-0.04	08/15/14	27.20	1670.95	0.54
TT-MW2-20S	1587.10	05/01/14	37.24	1549.86	0.07	08/15/14	37.47	1549.63	0.23
TT-MW2-20D	1587.62	05/01/14	36.44	1551.18	0.03	08/15/14	36.73	1550.89	0.29
TT-MW2-21	1978.45	05/01/14	67.25	1911.20	0.10	08/15/14	67.33	1911.12	0.08
TT-MW2-22	1975.86	05/01/14	65.88	1909.98	0.08	08/15/14	65.91	1909.95	0.03
TT-MW2-23	1995.17	05/01/14	83.90	1911.27	0.10	08/15/14	84.00	1911.17	0.10
TT-MW2-24	1964.26	05/01/14	54.54	1909.72	0.04	08/15/14	54.64	1909.62	0.10
TT-MW2-25	1966.96	05/01/14	64.71	1902.25	0.10	08/15/14	64.80	1902.16	0.09
TT-MW2-26	1944.43	05/01/14	43.33	1901.10	0.11	08/15/14	44.10	1900.33	0.77
TT-MW2-27	1948.27	05/01/14	53.44	1894.83	0.18	08/15/14	54.05	1894.22	0.61
TT-MW2-28	1995.65	05/01/14	63.58	1932.07	-0.17	08/15/14	64.47	1931.18	0.89
TT-MW2-29A	2147.77	05/01/14	Dry	Dry	NA	08/15/14	Dry	Dry	NA
TT-MW2-29B	2147.90	05/01/14	121.18	2026.72	-0.04	08/15/14	121.20	2026.70	0.02
TT-MW2-29C	2147.83	05/01/14	127.80	2020.03	0.00	08/15/14	127.85	2019.98	0.05
TT-MW2-30A	2074.37	05/01/14	73.35	2001.02	0.08	08/15/14	73.39	2000.98	0.04
TT-MW2-30B	2074.41	05/01/14	75.75	1998.66	0.09	08/15/14	75.78	1998.63	0.03
TT-MW2-30C	2074.35	05/01/14	78.00	1996.35	0.03	08/15/14	78.05	1996.30	0.05
TT-MW2-31A	2036.11	05/01/14	61.66	1974.45	0.21	08/15/14	61.98	1974.13	0.32
TT-MW2-31B	2036.15	05/01/14	68.28	1967.87	0.03	08/15/14	68.75	1967.40	0.47
TT-MW2-32	2004.87	05/01/14	53.85	1951.02	0.03	08/15/14	54.19	1950.68	0.34
TT-MW2-33A	2070.54	05/01/14	61.28	2009.26	-0.10	08/15/14	61.34	2009.20	0.06
TT-MW2-33B	2070.54	05/01/14	66.11	2004.43	-0.04	08/15/14	66.17	2004.37	0.06
TT-MW2-33C	2070.54	05/01/14	64.45	2006.09	0.45	08/15/14	64.49	2006.05	0.04
TT-MW2-34A	2066.84	05/01/14	67.82	1999.02	0.14	08/15/14	67.90	1998.94	0.08
TT-MW2-34B	2066.85	05/01/14	73.91	1992.94	0.05	08/15/14	74.05	1992.80	0.14
TT-MW2-34C	2066.84	05/01/14	75.70	1991.14	0.10	08/15/14	75.83	1991.01	0.13
TT-MW2-35A	2003.20	05/01/14	51.44	1951.76	0.04	08/15/14	52.04	1951.16	0.60



**Table 1**  
**Groundwater Elevation Data - Second Quarter 2014 and Third Quarter 2014**

Well ID	TOC Elevation (feet msl)	Second Quarter 2014				Third Quarter 2014			
		Date Measured	Depth to Water (feet BTOC)	Groundwater Elevation (feet msl)	Elevation Change <sup>1</sup> (feet)	Date Measured	Depth to Water (feet BTOC)	Groundwater Elevation (feet msl)	Elevation Change <sup>1</sup> (feet)
TT-MW2-35B	2003.20	05/01/14	56.47	1946.73	0.13	08/15/14	56.96	1946.24	0.49
TT-MW2-36A	2100.99	05/01/14	80.69	2020.30	0.08	08/15/14	80.81	2020.18	0.12
TT-MW2-36B	2101.04	05/01/14	81.34	2019.70	0.07	08/15/14	81.45	2019.59	0.11
TT-MW2-36C	2100.88	05/01/14	81.48	2019.40	0.08	08/15/14	81.56	2019.32	0.08
TT-MW2-37A	1963.62	05/01/14	65.00	1898.62	0.08	08/15/14	65.27	1898.35	0.27
TT-MW2-37B	1963.67	05/01/14	73.14	1890.53	0.06	08/15/14	73.51	1890.16	0.37
TT-MW2-38A	2084.56	05/01/14	60.96	2023.60	0.24	08/15/14	61.14	2023.42	0.18
TT-MW2-38B	2084.42	05/01/14	81.87	2002.55	0.10	08/15/14	81.92	2002.50	0.05
TT-MW2-39	2079.53	05/01/14	62.05	2017.48	0.18	08/15/14	62.18	2017.35	0.13
TT-MW2-40A	2096.28	05/01/14	73.44	2022.84	0.17	08/15/14	73.54	2022.74	0.10
TT-MW2-40B	2096.24	05/01/14	84.69	2011.55	0.09	08/15/14	84.80	2011.44	0.11
TT-MW2-40C	2096.28	05/01/14	89.50	2006.78	0.04	08/15/14	89.65	2006.63	0.15
Tt-MW2-41A	1812.47	05/01/14	25.30	1787.17	0.35	08/15/14	26.76	1785.71	1.46
Tt-MW2-41B	1812.22	05/01/14	22.35	1789.87	0.56	08/15/14	23.57	1788.65	1.22
Tt-MW2-42A	1799.06	05/01/14	29.21	1769.85	0.94	08/15/14	30.53	1768.53	1.32
Tt-MW2-42B	1799.07	05/01/14	26.58	1772.49	0.42	08/15/14	27.96	1771.11	1.38
Tt-MW2-43	1771.44	05/01/14	Dry	Dry	NA	08/15/14	Dry	Dry	NA
Tt-MW2-44	2085.22	05/01/14	61.65	2023.57	0.11	08/15/14	61.83	2023.39	0.18
TT-PZ2-1	1847.06	05/01/14	22.38	1824.68	-0.20	08/15/14	25.11	1821.95	2.73
TT-PZ2-2	1840.76	05/01/14	23.56	1817.20	0.16	08/15/14	24.81	1815.95	1.25
TT-PZ2-3	2079.89	05/01/14	59.81	2020.08	0.14	08/15/14	60.00	2019.89	0.19
TT-PZ2-4	1961.49	05/01/14	52.58	1908.91	0.06	08/15/14	52.68	1908.81	0.10

**Acronyms and Abbreviations**

BTOC: below top of well casing

NA - Not applicable

msl - Mean sea level

TOC: top of well casing

**Notes**

1. Positive values indicate an increase in elevations; negative values indicate a decrease in elevation

**Table 2**  
**Sampling Schedule and Analysis Method - Second Quarter 2014**

Sampling Location	Sample Date	VOCs (1)	1,4-dioxane (2)	Per chlorate (3)	RDX (4)	Comments and QA/QC Samples
WS-1	NA	-	-	-	-	Spring Sample, Dry
WS-2	NA	-	-	-	-	Spring Sample, Dry
WS-3	NA	-	-	-	-	Spring Sample, Dry
PPW-1	05/05/14	X	X	X	-	Private Production Well, MS/MSD sample
PPW-2	05/05/14	X	X	X	-	Private Production Well
PPW-3	05/05/14	X	X	X	-	Private Production Well
PPW-4	05/05/14	X	X	X	-	Private Production Well
PPW-5	05/06/14	X	X	X	-	Private Spring
PPW-6	NA	-	-	-	-	Private Spring - Dry
PPW-7	05/05/14	X	X	X	-	Private Spring
PPW-8	05/08/14	X	X	X	-	Private Production Well
TT-MW2-1	06/10/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-4S	06/11/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-5	06/13/14	X	X	X	-	Sample with Dedicated Pump
TT-MW2-5	06/16/14	-	X	-	-	Sample with Dedicated Pump
TT-MW2-6S	NA	-	-	-	-	Dry Well
TT-MW2-6D	06/13/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-7	06/13/14	-	X	X	-	Sample with Dedicated Pump, Duplicate TT-MW2-7-Dup
TT-MW2-7D	06/13/14	-	-	X	-	Sample with Dedicated Pump, MS/MSD sample
TT-MW2-8	06/13/14	-	X	X	-	Sample with Dedicated Pump
TT-MW2-9S	06/12/14	X	X	X	-	Sample with Dedicated Pump
TT-MW2-9D	06/12/14	-	X	X	-	Sample with Dedicated Pump
TT-MW2-10	06/10/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-11	06/11/14	X	-	X	-	Sample with Dedicated Pump, Duplicate TT-MW2-11-Dup
TT-MW2-12	06/10/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-13	06/10/14	-	-	X	X	Sample with Dedicated Pump, Duplicate TT-MW2-13-Dup
TT-MW2-14	06/09/14	X	-	X	-	Sample with Dedicated Pump
TT-MW2-16	06/09/14	-	-	X	-	Sample with Dedicated Pump, Duplicate TT-MW2-16-Dup
TT-MW2-17S	06/10/14	X	-	X	-	Sample with Dedicated Pump
TT-MW2-17D	06/10/14	X	-	X	-	Sample with Dedicated Pump
TT-MW2-18	06/10/14	-	-	X	-	Sample with Dedicated Pump
TT-MW-19S	06/12/14	-	-	X	-	Sample with Dedicated Pump
TT-MW-19D	06/12/14	-	-	X	-	Sample with Dedicated Pump
TT-MW-20S	06/12/14	-	-	X	-	Sample with Dedicated Pump, MS/MSD sample
TT-MW2-21	06/11/14	X	X	X	-	Sample with Dedicated Pump, Duplicate TT-MW2-21-Dup
TT-MW2-22	06/11/14	X	X	X	-	Sample with Dedicated Pump
TT-MW2-24	06/12/14	X	X	X	X	Sample with Dedicated Pump
TT-MW2-25	06/12/14	X	X	X	-	Sample with Dedicated Pump, MS/MSD sample
TT-MW2-26	06/12/14	X	X	X	-	Sample with Dedicated Pump
TT-MW2-27	06/13/14	X	X	X	-	Sample with Dedicated Pump
TT-MW2-28	06/11/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-29A	NA	-	-	-	-	Dry Well
TT-MW2-29B	06/10/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-29C	06/10/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-30A	06/09/14	X	-	X	-	Sample with Dedicated Pump
TT-MW2-30B	06/09/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-30C	06/09/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-31A	06/10/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-32	06/11/14	X	-	X	-	Sample with Dedicated Pump
TT-MW2-33A	06/09/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-34A	06/10/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-35A	06/11/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-36A	06/10/14	-	-	X	-	Sample with Dedicated Pump

**Table 2**  
**Sampling Schedule and Analysis Method - Second Quarter 2014**

Sampling Location	Sample Date	VOCs (1)	1,4-dioxane (2)	Per chlorate (3)	RDX (4)	Comments and QA/QC Samples
TT-MW2-37A	06/11/14	X	X	X	-	Sample with Dedicated Pump
TT-MW2-37B	06/11/14	X	X	X	-	Sample with Dedicated Pump
TT-MW2-38A	06/10/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-38B	06/10/14	-	-	X	-	Sample with Dedicated Pump
TT-MW2-39	06/09/14	-	-	X	-	Sample with Dedicated Pump, Duplicate TT-MW2-39-Dup
TT-MW2-40A	06/09/14	X	-	X	-	Sample with Dedicated Pump
TT-MW2-40B	06/09/14	X	-	X	-	Sample with Dedicated Pump
TT-MW2-41A	06/13/14	-	X	X	-	Sample with Dedicated Pump
TT-MW2-42A	06/13/14	-	X	X	-	Sample with Portable Pump
TT-MW2-44	06/09/14	-	-	X	-	Sample with Dedicated Pump
Total Sampling Locations:		63				
Total Samples Collected:		57				
Notes:						
	Well not sampled or surface water sample not collected.					
	"- " Not analyzed					
	EPA - United States Environmental Protection Agency.					
	QA/QC - Quality assurance / quality control					
	MS / MSD - Matrix Spike / Matrix Spike Duplicate.					
	NA - Not available.					
	VOCs - Volatile organic compounds					
	RDX - Hexahydro-1,3,5-trinitro-1,3,5-triazine					
	(1) - Volatile organic compounds (VOCs) analyzed by EPA Method 8260 B.					
	(2) - 1,4 - Dioxane analyzed by EPA Method 8270C SIM					
	(3) - Perchlorate analyzed by EPA Method 332.0.					
	(4) - RDX analyzed by EPA Method 8330					

Table 3  
2014 Water Quality Monitoring Locations and Sampling Frequency

Monitoring Well	2014 Well Classification	1st Quarter 2014 to 4th Quarter 2014 Monitoring Program																
		VOCs (EPA 8260B or 524.2)				Perchlorate (EPA 332.0)					1,4-Dioxane (EPA 8270 SIM)				RDX (EPA 8330)			
		1Q	2Q	3Q	4Q	1Q	2Q	3Q	4Q	Bi	1Q	2Q	3Q	4Q	1Q	2Q	3Q	4Q
Surface Water Locations																		
WS-1	-						•		•									
WS-2	-						•		•									
WS-3	-						•		•									
Storm Water Locations																		
SW-01	-					•												
SW-02	-					•												
SW-03	-					•												
SW-04	-					•												
SW-05	-					•												
SW-06	-					•												
SW-07	-					•												
Private Production Wells and Springs																		
PPW1	-		•				•					•						
PPW2	-		•				•					•						
PPW3	-		•				•					•						
PPW4	-		•				•					•						
PPW5	-		•				•					•						
PPW6	-		•				•					•						
PPW7	-		•				•					•						
Monitoring Wells																		
TT-MW2-1	H						•											
TT-MW2-4S	H						•											
TT-MW2-5	H		•				•					•						
TT-MW2-6S	H		•				•					•						
TT-MW2-6D	V						•											
TT-MW2-7	H						•					•						
TT-MW2-7D	V						•											
TT-MW2-8	H						•					•						
TT-MW2-9S	H/I		•		•		•		•			•		•				
TT-MW2-9D	V						•					•						
TT-MW2-10	H						•											
TT-MW2-11	H		•				•											
TT-MW2-12	H						•											
TT-MW2-13	H						•									•		
TT-MW2-14	H		•				•											
TT-MW2-16	B									•								
TT-MW2-17S	H		•				•											
TT-MW2-17D	V		•				•											
TT-MW2-18	V						•											
TT-MW-19S	H						•											
TT-MW-19D	V						•											
TT-MW-20S	G						•		•									
TT-MW2-21	H/I		•		•		•		•			•						
TT-MW2-22	H		•				•					•						
TT-MW2-23	R																	
TT-MW2-24	H		•				•					•				•		
TT-MW2-25	H		•				•					•						
TT-MW2-26	H		•				•					•						
TT-MW2-27	H/I		•				•		•			•						
TT-MW2-28	H						•											
TT-MW2-29A	B									•								
TT-MW2-29B	B									•								
TT-MW2-29C	B									•								
TT-MW2-30A	V		•				•											
TT-MW2-30B	V/I						•		•									
TT-MW2-30C	V						•											
TT-MW2-31A	V						•											
TT-MW2-32	V		•				•											
TT-MW2-33A	H						•											
TT-MW2-34A	H/I						•		•									
TT-MW2-35A	V						•											
TT-MW2-36A	H						•											
TT-MW2-37A	H/I		•		•		•		•			•		•				
TT-MW2-37B	V/I		•				•		•			•						
TT-MW2-38A	H						•											
TT-MW2-38B	V						•											
TT-MW2-38C	V/I						•		•									
TT-MW2-39	H						•											
TT-MW2-40A	H/I		•				•		•									
TT-MW2-40B	V		•				•											
TT-MW2-41A	H						•					•						
TT-MW2-42A	G						•		•			•						
Monitoring Wells (Not Sampled)																		
TT-MW2-2	R																	
TT-MW2-3	R																	
TT-MW2-4D	R																	
TT-MW-20D	R																	
TT-MW2-31B	R																	
TT-MW2-33B	R																	
TT-MW2-33C	R																	
TT-MW2-34B	R																	
TT-MW2-34C	R																	
TT-MW2-35B	R																	
TT-MW2-36B	R																	
TT-MW2-36C	R																	
TT-MW2-40C	R																	
TT-MW2-43	R																	
Piezometers (Not Sampled)																		
TT-MW2-41B	-																	
TT-MW2-42B	-																	
TT-PZ2-1	-																	

Table 3  
2014 Water Quality Monitoring Locations and Sampling Frequency

Monitoring Well	1st Quarter 2014 to 4th Quarter 2014 Monitoring Program																	
	2014 Well Classification	VOCs (EPA 8260B or 524.2)				Perchlorate (EPA 332.0)					1,4-Dioxane (EPA 8270 SIM)				RDX (EPA 8330)			
		1Q	2Q	3Q	4Q	1Q	2Q	3Q	4Q	Bi	1Q	2Q	3Q	4Q	1Q	2Q	3Q	4Q
TT-PZ2-2	-																	
TT-PZ2-3	-																	
TT-PZ2-4	-																	
Extraction Wells (Not Sampled)																		
TT-EW2-1	-																	
TT-EW2-2	-																	
TT-EW2-3	-																	
TT-EW2-4	-																	
Totals	-	0	26	0	3	7	57	0	14	4	0	23	0	2	0	2	0	0
		29				82					25				2			

**Notes**  
EPA: United States Environmental Protection Agency  
VOCs: Volatile organic compounds  
RDX: Hexahydro-1,3,5-trinitro-1,3,5-triazine  
Bi: Biennial (sampled in even numbered years)  
B: Background well  
G: Guard well  
H: Horizontal extent well  
I: Increasing contaminant trend well  
R: Redundant well  
V: Vertical distribution well

**Table 4**  
**Groundwater Elevation Change - Second Quarter 2013 and Third Quarter 2014**

Site Area	Range of Groundwater Elevation Change - Second Quarter 2014		Average Change By Area (feet)	Range of Groundwater Elevation Change - Third Quarter 2014		Average Change By Area (feet)
	Minimum	Maximum		Minimum	Maximum	
J	0.05	0.16	0.11	0.12	0.14	0.13
K	-0.10	0.45	0.11	0.02	0.47	0.13
L	-0.02	0.13	0.04	0.18	0.60	0.38
M	-0.17	0.03	-0.04	0.34	0.89	0.55
WDA	0.04	0.10	0.07	0.03	0.37	0.14
LC	-0.20	0.94	0.19	0.09	2.73	1.01
WS	-0.04	0.07	0.02	0.23	0.54	0.33

**Notes**

J: Final Assembly Area

K: Former Test Bay Area

L: Former Burn Area

M: Garbage disposal Area

WDA: Waste discharge area

LC: Lower Canyon

RCA: Western Riverside County Regional Conservation Authority Property

**Table 5**  
**Summary of Horizontal and Vertical Groundwater Gradients**

<b><u>Horizontal Groundwater Gradients</u></b> (feet / foot), approximating a flowline perpendicular to groundwater contours									
	<b>Overall</b>	<b>Overall</b>							
	STF	QAL/WSTF							
	<b>TT-MW2-2</b>	<b>TT-MW2-16</b>							
	to	to							
	<b>TT-MW2-6D</b>	<b>TT-MW2-6S</b>							
First Quarter (February 2014)	0.029	0.030							
Second Quarter (May 2014)	0.029	0.030							
Third Quarter (August 2014)	0.029	0.030 (1)							
<b><u>Vertical Groundwater Gradients</u></b> (feet / foot)									
	<b>Area J</b>	<b>Area K</b>	<b>Area K</b>	<b>Area L</b>	<b>Southern portion of Site 2</b>	<b>Southern portion of Site 2</b>	<b>Southern portion of Site</b>	<b>RCA Property</b>	<b>RCA Property</b>
deep screen	<b>TT-MW2-2 (STF)</b>	<b>TT-MW2-17D (wWSTF)</b>	<b>TT-MW2-18 (STF)</b>	<b>TT-MW2-4D (STF)</b>	<b>TT-MW2-9D (STF)</b>	<b>TT-MW2-6D (STF)</b>	<b>TT-MW2-7D (STF)</b>	<b>TT-MW2-19D (MEF)</b>	<b>TT-MW2-20D (MEF)</b>
shallow screen	<b>TT-MW2-16 (wSTF)</b>	<b>TT-MW2-17S (wSTF)</b>	<b>TT-MW2-1 (wSTF)</b>	<b>TT-MW2-4S (STF)</b>	<b>TT-MW2-9S (wWSTF)</b>	<b>TT-MW2-6S (wWSTF)</b>	<b>TT-MW2-7 (wWSTF)</b>	<b>TT-MW2-19S (wMEF)</b>	<b>TT-MW2-20S (wMEF)</b>
First Quarter (February 2014)	-0.15	-0.02	0.01	-0.31	-0.11	-0.05	0.06	0.17	0.03
Second Quarter (May 2014)	-0.15	-0.02	0.01	-0.30	-0.11	-0.05	0.07	0.17	0.01
Third Quarter (August 2014)	-0.15	-0.02	0.01	-0.31	-0.11	NA (1)	0.08	0.17	0.01
<b>Notes:</b> <div><div>(1) - TT-MW2-6S was found to be dry during the Fourth Quarter 2014 so the gradient was calculated between TT-MW2-16 and TT-MW2-5.</div><div>Area J - Final Assembly Area</div><div>Area K - Former Test Bay Area</div><div>Area L - Former Burn Area</div><div>RCA Property - Western Riverside County Regional Conservation Authority Property</div><div>QAL - Quaternary Alluvium</div><div>STF - San Timoteo formation</div><div>MEF - Mt. Eden formation</div><div>wSTF - Weathered San Timoteo formation</div><div>wMEF - Weathered Mt. Eden formation</div></div>									

Table 6  
Summary of Validated Detected Organic and Inorganic Analytes - Second Quarter 2014

Sampling Location	Sample Date	Per chlorate	1,4-Dioxane	Acetone	2-Butanone	Benzene	Carbon Disulfide	Chloro form	1,1-Dichloro ethane	1,2-Dichloro ethane	1,1-Dichloro ethene	c-1,2-Dichloro ethene	t-1,2-Dichloro ethene	Methylene Chloride	Toluene	1,1,2-Trichloroe thane	Trichloroe thene	RDX
All results reported in µg/L unless otherwise stated																		
TT-MW2-1	06/10/14	18,000	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-4S	06/11/14	0.72	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-5	06/13/14	710	-	<5.0	<1.2	<0.14	<0.36	<0.46	<0.098	<0.21	<0.12	<0.18	<0.10	0.35 Jq	<0.22	<0.31	<0.25	-
TT-MW2-5	06/16/14	-	0.43	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-6D	06/13/14	<0.35	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-7	06/13/14	220	0.22	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-7D	06/13/14	<0.071	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-8	06/13/14	220	0.12 Jq	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-9S	06/12/14	19,000	20	<5.0	<1.2	<0.14	<0.36	<0.46	<0.098	<0.21	<0.12	<0.18	<0.10	<0.15	<0.22	<0.31	1.6	-
TT-MW2-9D	06/12/14	<0.35	<0.10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-10	06/10/14	<0.071	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-11	06/11/14	320	-	<5.0	<1.2	<0.14	<0.36	<0.46	<0.098	<0.21	<0.12	0.24 Jq	<0.10	0.46 Jq	<0.22	<0.31	7.5	-
TT-MW2-12	06/10/14	0.28	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-13	06/12/14	3,900	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0.41 Jq
TT-MW2-14	06/09/14	29,000	-	<5.0	<1.2	<0.14	<0.36	<0.46	<0.098	<0.21	<0.12	<0.18	<0.10	0.46 Jq	<0.22	<0.31	<0.25	-
TT-MW2-16	06/09/14	3.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-17S	06/10/14	4,200	-	<5.0	<1.2	<0.14	<0.36	<0.46	<0.098	<0.21	<0.12	<0.18	<0.10	0.49 Jq	<0.22	<0.31	0.46 Jq	-
TT-MW2-17D	06/10/14	42,000	-	<5.0	<1.2	<0.14	<0.36	<0.46	<0.098	<0.21	<0.12	<0.18	<0.10	0.36 Jq	<0.22	<0.31	4.9	-
TT-MW2-18	06/10/14	12,000	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-19S	06/12/14	4.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-19D	06/12/14	<0.071	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-20S	06/12/14	<0.35	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-21	06/11/14	20	<0.10	<5.0	<1.2	<0.14	<0.36	<0.46	<0.098	<0.21	<0.12	<0.18	<0.10	1.7 Jq	<0.22	<0.31	3.5	-
TT-MW2-22	06/11/14	<0.071	81	<5.0	<1.2	0.82	<0.36	0.98	3.4	0.95	16	12	0.77	1.9 Jq	<0.22	<0.31	490	-
TT-MW2-24	06/12/14	120,000	170	<5.0	<1.2	0.15 Jq	<0.36	2.3	0.58	0.42 Jq	2.2	<0.18	<0.10	0.90 Jq	<0.22	0.34 Jq	88	<0.2
TT-MW2-25	06/12/14	<0.071	<0.10	<5.0	<1.2	<0.14	<0.36	<0.46	<0.098	<0.21	<0.12	<0.18	<0.10	<0.15	<0.22	<0.31	<0.25	-
TT-MW2-26	06/12/14	33	<0.10	<5.0	<1.2	<0.14	<0.36	<0.46	<0.098	<0.21	<0.12	<0.18	<0.10	0.19 Jq	<0.22	<0.31	<0.25	-
TT-MW2-27	06/13/14	580	1.2	<5.0	<1.2	<0.14	<0.36	<0.46	<0.098	<0.21	<0.12	<0.18	<0.10	<0.15	<0.22	<0.31	<0.25	-
TT-MW2-28	06/11/14	0.63	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-29B	06/10/14	0.92	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-29C	06/10/14	<0.071	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-30A	06/09/14	160	-	<5.0	<1.2	<0.14	<0.36	<0.46	<0.098	<0.21	<0.12	<0.18	<0.10	0.54 Jq	<0.22	<0.31	<0.25	-
TT-MW2-30B	06/09/14	9,500	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-30C	06/09/14	<0.071	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-31A	06/10/14	<0.71	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-32	06/11/14	<0.071	-	<5.0	<1.2	<0.14	<0.36	<0.46	<0.098	<0.21	<0.12	<0.18	<0.10	<0.15	<0.22	<0.31	<0.25	-
TT-MW2-33A	06/09/14	0.78	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-34A	06/10/14	11	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-35A	06/11/14	<3.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-36A	06/10/14	<0.071	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-37A	06/11/14	16,000	20	33	4.1	0.28 Jq	<0.36	<0.46	<0.098	<0.21	0.31 Jq	<0.18	<0.10	0.73 Jq	0.26 Jq	<0.31	5.8	-
TT-MW2-37B	06/11/14	190	1.1	<5.0	<1.2	<0.14	12	<0.46	<0.098	<0.21	<0.12	<0.18	<0.10	0.50 Jq	0.47 Jq	<0.31	<0.25	-
TT-MW2-38A	06/10/14	110,000	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-38B	06/10/14	4,500	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-39	06/09/14	93,000	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-40A	06/09/14	0.72	-	<5.0	<1.2	<0.14	<0.36	<0.46	<0.098	<0.21	<0.12	<0.18	<0.10	0.28 Jq	<0.22	<0.31	<0.25	-
TT-MW2-40B	06/09/14	<0.071	-	<5.0	<1.2	1.8	<0.36	<0.46	<0.098	<0.21	<0.12	<0.18	<0.10	0.77 Jq	<0.22	<0.31	<0.25	-
TT-MW2-41A	06/13/14	<0.071	<0.10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TT-MW2-42A	06/13/14	0.18	<0.10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Table 6  
Summary of Validated Detected Organic and Inorganic Analytes - Second Quarter 2014

Sampling Location	Sample Date	Per chlorate	1,4-Dioxane	Acetone	2-Butanone	Benzene	Carbon Disulfide	Chloro form	1,1-Dichloro ethane	1,2-Dichloro ethane	1,1-Dichloro ethene	c-1,2-Dichloro ethene	t-1,2-Dichloro ethene	Methylene Chloride	Toluene	1,1,2-Trichloroe thane	Trichloroe thene	RDX
All results reported in µg/L unless otherwise stated																		
TT-MW2-44	06/09/14	30,000	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Method Detection Limit		0.071	0.10	5.0	1.2	0.14	0.36	0.46	0.098	0.21	0.12	0.18	0.10	0.15	0.22	0.31	0.25	0.20
MCL (unless noted) / DWNL		6	1 (1)	NA	NA	1	160 (1)	NA	5	0.5	6	6	10	5	150	5	5	0.3 (1)
<div><div>Notes:</div><div>Only analytes positively detected in samples are presented in this table. For a complete list of constituents analyzed, refer to the laboratory data packages in Appendix G.</div><div>µg/L - Micrograms per liter</div><div>MCL - California Department of Public Health Services maximum contaminant level.</div><div>DWNL - California Department of Public Health Services drinking water notification level.</div><div>NA - Not available (MCL/DWNL not established).</div><div>(1) - DWNL</div><div>Bold - MCL or DWNL exceeded.</div><div>" - " Not analyzed</div><div>&lt; # - Method detection limit concentration is shown.</div><div>J - The analyte was positively identified, but the concentration is an estimated value.</div><div>q - The analyte detection was below the practical quantitation limit (PQL).</div></div>																		

**Table 7**  
**Summary Statistics for Validated Detected Organic and Inorganic Analytes - Second Quarter 2014**

Organic Analytes Detected	Total Number of Samples Analyzed	Total Number of Detections <sup>(1)</sup>	Number of Detections Exceeding MCL or DWNL <sup>(1)</sup>	MCL/DWNL		Minimum Concentration Detected		Maximum Concentration Detected	
1,4-Dioxane	15	9	6	1 <sup>(2)</sup>	µg/L	0.12	µg/L	170	µg/L
Acetone	18	1	0	-	µg/L	33	µg/L	33	µg/L
2-Butanone	18	1	0	-	µg/L	4.1	µg/L	4.1	µg/L
Benzene	18	4	1	1	µg/L	0.15	µg/L	1.8	µg/L
Carbon Disulfide	18	1	0	160 <sup>(2)</sup>	µg/L	12	µg/L	12	µg/L
Chloroform	18	2	0	-	µg/L	0.98	µg/L	2.3	µg/L
1,1-Dichloroethane	18	2	0	5	µg/L	0.58	µg/L	3.4	µg/L
1,2-Dichloroethane	18	2	1	0.5	µg/L	0.42	µg/L	0.95	µg/L
1,1-Dichloroethene	18	3	1	6	µg/L	0.31	µg/L	16	µg/L
cis-1,2-Dichloroethene	18	2	1	6	µg/L	0.24	µg/L	12	µg/L
trans-1,2-Dichloroethene	18	1	0	10	µg/L	0.77	µg/L	0.77	µg/L
Methylene Chloride	18	14	0	5	µg/L	0.19	µg/L	1.9	µg/L
Toluene	18	2	0	150	µg/L	0.26	µg/L	0.47	µg/L
1, 1,2-Trichloroethane	18	1	0	5	µg/L	0.34	µg/L	0.34	µg/L
Trichloroethene	18	8	4	5	µg/L	0.46	µg/L	490	µg/L
RDX	2	1	1	0.3 <sup>(2)</sup>	µg/L	0.41	µg/L	0.41	µg/L
Inorganic Analytes Detected	Total Number of Samples Analyzed	Total Number of Detections <sup>(1)</sup>	Number of Detections Exceeding MCL or DWNL <sup>(1)</sup>	MCL/DWNL		Minimum Concentration Detected		Maximum Concentration Detected	
Perchlorate	49	33	24	6	µg/L	0.18	µg/L	120,000	µg/L
<b>Notes:</b> Only analytes positively detected in groundwater or surface water samples are presented in this table. For a complete list of constituents analyzed, refer to the laboratory data package. MCL - California Department of Public Health Services maximum contaminant level. DWNL - California Department of Public Health Services state drinking water notification level. " - " MCL/DWNL not established. (1) - Number of detections exclude sample duplicates, trip blanks, and equipment blanks. (2) - DWNL. µg/L - Micrograms per liter.									

**Table 8**  
**Laborde Canyon**  
**Groundwater Chemicals of Potential Concern**

<b>Analyte</b>	<b>Classification</b>
Perchlorate	Primary
Trichloroethene	Primary
1,4-Dioxane	Primary
Benzene	Secondary
1, 2-Dichloroethane	Secondary
1, 1-Dichloroethene	Secondary
cis-1,2-dichloroethene	Secondary
RDX	Secondary
<b>Note:</b> RDX - Hexahydro-1,3,5-trinitro-1,3,5-triazine	

**Table 9**  
**Mann-Kendall Concentration Trend Matrix**

Mann-Kendall Statistic (S)	Confidence in Trend	Concentration Trend
$S > 0$	$> 95\%$	Increasing
$S > 0$	90 - 95%	Probably Increasing
$S > 0$	$< 90\%$	No Trend
$S \leq 0$	$< 90\%$ and $COV \geq 1$	No Trend
$S \leq 0$	$< 90\%$ and $COV < 1$	Stable
$S < 0$	90 - 95%	Probably Decreasing
$S < 0$	$> 95\%$	Decreasing
ND	-	Non-detect
NA	-	Not applicable
<b>Notes:</b> $>$ - Greater than $<$ - Less than $\leq$ - Less than or equal to COV - Coefficient of Variation S - Mann-Kendall statistic ND - All results non-detect NA - Not applicable, less than four quarters of data		

**Table 10**  
**Summary of Mann-Kendall Trend Analysis of Chemicals of Potential Concern for 2014 Sampled Monitoring Wells**

Analyte	Locations Tested	Insufficient Data	No Trend	Non Detect	Decreasing Trend	Probably Decreasing Trend	Stable Trend	Probably Increasing Trend	Increasing Trend
Trichloroethene	18	0	1	9	1	0	0	1	6
Perchlorate	49	0	14	3	14	4	2	2	10
1,4-Dioxane	15	0	4	5	1	2	0	0	3
RDX	2	0	0	0	1	0	1	0	0
Total Analysis	84	0	19	17	17	6	3	3	19
<b>Note:</b> RDX - Hexahydro-1,3,5-trinitro-1,3,5-triazine									

**Table 11****Summary of Mann-Kendall Trend Analysis of Chemicals of Potential Concern for 2014 Sampled Surface Water Locations**

Analyte	Locations Tested	Insufficient Data	No Trend	Non Detect	Decreasing Trend	Probably Decreasing Trend	Stable Trend	Probably Increasing Trend	Increasing Trend
Trichloroethene	0	0	0	0	0	0	0	0	0
Perchlorate	3	0	3	0	0	0	0	0	0
1,4-Dioxane	0	0	0	0	0	0	0	0	0
RDX	0	0	0	0	0	0	0	0	0
Total Analysis	3	0	3	0	0	0	0	0	0
<b>Note:</b> RDX - Hexahydro-1,3,5-trinitro-1,3,5-triazine									

**Table 12**  
**Magnitude of Trends Detected for Chemicals of Potential Concern for 2014 Sampled Surface Water and Spring Locations**

Analyte	Decreasing Trend		Probably Decreasing Trend		Probably Increasing Trend				Increasing Trend			
	Number of Wells	Magnitude (µg/L/yr)	Number of Wells	Magnitude (µg/L/yr)	Number of Wells	Location	Magnitude		Number of Wells	Location	Magnitude	
							(µg/L/yr)	(%/yr)			(µg/L/yr)	(%/yr)
Trichloroethene	1	1.36	0		1	TT-MW2-11	0.10	1.4	6	TT-MW2-9S TT-MW2-17S TT-MW2-17D TT-MW2-21 TT-MW2-22 TT-MW2-37A	0.23 0.03 0.37 0.59 38 0.90	24 12 16 22 11 31
Perchlorate	14	0.04 to 3,796	4	0.06 to 1,595	2	TT-MW2-13 TT-MW2-33A	88 0.09	2.2 20	10	TT-MW2-1 TT-MW2-4S TT-MW2-9S TT-MW2-21 TT-MW2-27 TT-MW2-30B TT-MW2-34A TT-MW2-37A TT-MW2-37B TT-MW2-40A	394 0.04 2,219 5.04 54 971 1.61 2,727 37 2.01	5.0 6.6 35 42 20 26 37 33 58 44
1,4-Dioxane	1	13.1	2	0.23 to 23	0				3	TT-MW2-9S TT-MW2-22 TT-MW2-37A	1.84 3.94 1.73	13 7.3 13
RDX	1	0.67	0		0		0		0			

**Acronyms and Abbreviations**

µg/L/yr: micrograms per liter per year.

%/yr: percent change per year with respect to the sample mean

RDX: hexahydro-1,3,5-trinitro-1,3,5-triazine

**Table 13**  
**Historical Trichloroethene Trend Summary in Monitoring Wells**

Trend Category	Locations Tested								
	2006	2007	2008	2009	2010	2011	2012	2013	2014
"N/A"-Insufficient Data	3	0	6	31	0	0	0	0	0
"ND" - Non Detect (new designation)	--	--	--	--	50	11	11	10	9
"NT" - No Trend	1	1	2	1	5	2	2	2	1
"S" - Stable	4	20	16	24	0	1	0	0	0
"I" - Increasing	0	0	1	1	4	6	6	6	6
"PI" -Probably Increasing	0	0	0	1	0	0	0	0	1
"D" - Decreasing	0	0	0	0	0	0	0	1	1
"PD" -Probably Decreasing	0	0	0	0	0	0	1	0	0
Total Locations Tested	8	21	25	58	59	20	20	19	18
Notes:									
-- ND (non-detect) was not a category designation prior to the 2010 statistics									



**Table 14**  
**Historical Perchlorate Trend Summary in Monitoring Wells**

Trend Category	Locations Tested								
	2006	2007	2008	2009	2010	2011	2012	2013	2014
"N/A"-Insufficient Data	3	0	6	30	2	0	0	0	0
"ND" - Non Detect (new designation)	--	--	--	--	7	3	3	3	3
"NT" - No Trend	5	5	2	12	31	18	15	13	14
"S" - Stable	0	8	7	11	10	6	4	2	2
"I" - Increasing	0	4	5	3	7	8	12	10	10
"PI" -Probably Increasing	0	0	1	1	1	4	0	2	2
"D" - Decreasing	0	4	3	3	5	8	16	11	14
"PD" -Probably Decreasing	0	0	1	1	1	3	1	7	4
Total Locations Tested	8	21	25	61	64	50	51	48	49
Notes: -- ND (non-detect) was not a category designation prior to the 2010 statistics									

**Table 15**  
**Historical 1,4-Dioxane Trend Summary in Monitoring Wells**

Trend Category	Locations Tested								
	2006	2007	2008	2009	2010	2011	2012	2013	2014
"N/A"-Insufficient Data	--	--	--	22	0	0	0	0	0
"ND" - Non Detect (new designation)	--	--	--	--	6	4	5	5	5
"NT" - No Trend	--	--	--	0	6	6	6	6	4
"S" - Stable	--	--	--	0	1	2	2	1	0
"I" - Increasing	--	--	--	0	0	2	3	3	3
"PI" -Probably Increasing	--	--	--	0	0	0	0	0	0
"D" - Decreasing	--	--	--	0	0	0	0	1	1
"PD" -Probably Decreasing	--	--	--	0	0	0	0	0	2
Total Locations Tested	0	0	0	22	13	14	16	16	15
Notes:									
-- ND (non-detect) was not a category designation prior to the 2010 statistics									

**Table 16**  
**Historical Perchlorate Trend Summary in Surface Water**

Trend Category	Locations Tested								
	2006	2007	2008	2009	2010	2011	2012	2013	2014
"N/A"-Insufficient Data	0	0	0	1	5	0	0	0	0
"ND" - Non Detect (new designation)	--	--	--	--	1	1	1	1	0
"NT" - No Trend	0	0	0	1	0	2	0	0	3
"S" - Stable	0	0	0	0	1	4	1	0	0
"I" - Increasing	0	0	0	0	0	0	0	0	0
"PI" -Probably Increasing	0	0	0	0	0	0	0	0	0
"D" - Decreasing	0	0	0	0	1	1	0	1	0
"PD" -Probably Decreasing	0	0	0	0	0	0	1	0	0
Total Locations	0	0	0	2	8	8	3	2	3
Notes: -- ND (non-detect) was not a category designation prior to the 2010 statistics									

Table 17  
Summary of Increasing Chemicals of Potential Concern Trends – Second Quarter 2014

Well ID	Perchlorate				Trichloroethene				1,4-Dioxane				RDX	
	Q2 2014 Result (µg/L)	Trend Type	Trend Magnitude		Q2 2014 Result (µg/L)	Trend Type	Trend Magnitude		Q2 - 2014 Result (µg/L)	Trend Type	Trend Magnitude		Q2 - 2014 Results (µg/L)	Trend Type
			(µg/L/yr)	(%/yr)			(µg/L/yr)	(%/yr)			(µg/L/yr)	(%/yr)		
Area K														
TT-MW2-1	18,000	Increasing	394	5.48	--	--			--	--			--	--
TT-MW2-13	3,900	Probably Increasing	88	2.19	--	--			--	--			0.41 Jq	Stable
TT-MW2-17S	4,200	Decreasing	-138	-2.56	0.46 Jq	Increasing	0.03	11.9	--	--			--	--
TT-MW2-17D	42,000	No Trend			4.9	Increasing	0.37	15.5	--	--			--	--
TT-MW2-30B	9,500	Increasing	971	26	--	--			--	--			--	--
TT-MW2-33A	0.78	Probably Increasing	0.09	20	--	--			--	--			--	--
TT-MW2-34A	11	Increasing	1.61	37	--	--			--	--			--	--
TT-MW2-40A	0.72	Increasing	2.01	44	<0.25	Non Detect			--	--			--	--
Area L														
TT-MW2-4S	0.72	Increasing	0.04	6.57	--	--			--	--			--	--
Area M														
TT-MW2-11	320	Probably Decreasing	-5.22	-2.01	7.5	Probably Increasing	0.10	1.42	--	--			--	--
Former Waste Discharge Area														
TT-MW2-21	20	Increasing	5.04	42	3.5	Increasing	0.59	22	<0.10	Non Detect			--	--
TT-MW2-22	<0.071	Non Detect			490	Increasing	38	10.6	81	Increasing	3.94	7.30	--	--
TT-MW2-37A	16,000	Increasing	2,727	33	5.8	Increasing	0.90	31	20	Increasing	1.73	13.3	--	--
TT-MW2-37B	190	Increasing	37	58	<0.25	Non Detect			1.1	No Trend			--	--
Lower Canyon (Downgradient and Crossgradient of the Former Waste Discharge Area)														
TT-MW2-9S	19,000	Increasing	2,219	35	1.6	Increasing	0.23	24	20	Increasing	1.84	13.1	--	--
TT-MW2-27	580	Increasing	54	20	<0.25	Non Detect			1.2	No Trend			--	--
MCL / DWNL	6.0				5.0				3 (1)				0.3 (1)	

Acronyms and Abbreviations

%/yr: percent change per year with respect to the sample mean.  
µg/L/yr: micrograms per liter per year  
µg/L: micrograms per liter  
MCL: California Department of Public Health Maximum Contaminant Level.  
DWNL: California Department of Public Health drinking water notification level.

Notes

Blue shading indicates locations where the magnitude of the increasing or probably increasing trend represents greater than a 20 percent change  
Bold indicates MCL or DWNL exceeded  
-- indicates not analyzed  
< indicates concentration less than the indicated method detection limit  
J: the analyte was positively identified, but the concentration is an estimated value.  
q: the analyte detected was below the Practical Quantitation Limit (PQL).  
1. Value shown is the DWNL

**Table 18**  
**Current Sampling Frequencies by Well Classification**

<b>Well Classification</b>	<b>Approved Sampling Frequency</b>
Horizontal Extent Wells	Annual
Vertical Distribution Wells	Annual
Increasing Contaminant Trend Wells	Semiannual
Background Wells	Biennial
Remedial Monitoring Wells	Vary, based on remedial action proposed
Guard Wells	Semiannual
New Wells	4 quarters then reclassify
Redundant Wells	Suspend (no sampling)

Table 19  
Proposed Monitoring Well Sampling Schedule and Frequency

Monitoring Well	2014 Well Classification	Proposed 1st Quarter 2015 to 4th Quarter 2015 Monitoring Program																	
		2015 Well Classification	VOCs (EPA 8260B)				Perchlorate (EPA 332.0)					1,4-Dioxane (EPA 8270 SIM)				RDX (EPA 8330)			
			2015				2015					2015				2015			
			1Q	2Q	3Q	4Q	1Q	2Q	3Q	4Q	Bi	1Q	2Q	3Q	4Q	1Q	2Q	3Q	4Q
Surface Water Locations																			
WS-1	-	-						•		•									
WS-2	-	-						•		•									
WS-3	-	-						•		•									
Storm Water Locations																			
SW-01	-	-					•												
SW-02	-	-					•												
SW-03	-	-					•												
SW-04	-	-					•												
SW-05	-	-					•												
SW-06	-	-					•												
SW-07	-	-					•												
Private Production Wells and Springs																			
PPW1	-	-		•				•					•						
PPW2	-	-		•				•					•						
PPW3	-	-		•				•					•						
PPW4	-	-		•				•					•						
PPW5	-	-		•				•					•						
PPW6	-	-		•				•					•						
PPW7	-	-		•				•					•						
Monitoring Wells																			
TT-MW2-1	H	H						•											
TT-MW2-4S	H	H						•											
TT-MW2-5	H	H		•				•					•						
TT-MW2-6S	H	H		•				•					•						
TT-MW2-6D	V	V						•											
TT-MW2-7	H	H						•					•						
TT-MW2-7D	V	V						•											
TT-MW2-8	H	H						•					•						
TT-MW2-9S	H/I	H/I		•		•		•		•			•		•				
TT-MW2-9D	V	V						•					•						
TT-MW2-10	H	H						•											
TT-MW2-11	H	H		•				•											
TT-MW2-12	H	H						•											
TT-MW2-13	H	H						•									•		
TT-MW2-14	H	H		•				•											
TT-MW2-16	B	B									•								
TT-MW2-17S	H	H		•				•											
TT-MW2-17D	V	V		•				•											
TT-MW2-18	V	V						•											
TT-MW-19S	H	H						•											
TT-MW-19D	V	V						•											
TT-MW-20S	G	G						•		•									
TT-MW2-21	H/I	H/I		•		•		•		•			•						
TT-MW2-22	H	H		•				•					•						
TT-MW2-23	R	R																	
TT-MW2-24	H	H		•				•					•				•		
TT-MW2-25	H	H		•				•					•						
TT-MW2-26	H	H		•				•					•						
TT-MW2-27	H/I	H/I		•				•		•			•						
TT-MW2-28	H	H						•											
TT-MW2-29A	B	B									•								
TT-MW2-29B	B	B									•								
TT-MW2-29C	B	B									•								
TT-MW2-30A	V	V		•				•											
TT-MW2-30B	V/I	V/I						•		•									
TT-MW2-30C	V	V						•											
TT-MW2-31A	V	V						•											
TT-MW2-32	V	V		•				•											
TT-MW2-33A	H	H/I						•		•									
TT-MW2-34A	H/I	H/I						•		•									
TT-MW2-35A	V	V						•											
TT-MW2-36A	H	H						•											
TT-MW2-37A	H/I	H/I		•		•		•		•			•		•				
TT-MW2-37B	V/I	V/I		•				•		•			•						
TT-MW2-38A	H	H						•											
TT-MW2-38B	V	V						•											
TT-MW2-38C	V/I	V						•											
TT-MW2-39	H	H						•											
TT-MW2-40A	H/I	H/I		•				•		•									
TT-MW2-40B	V	V		•				•											
TT-MW2-41A	H	H						•					•						
TT-MW2-42A	G	G						•		•			•						
TT-MW2-44	H	H						•											
Monitoring Wells (Not Sampled)																			
TT-MW2-2	R	R																	
TT-MW2-3	R	R																	
TT-MW2-4D	R	R																	
TT-MW-20D	R	R																	
TT-MW2-31B	R	R																	


Table 19  
Proposed Monitoring Well Sampling Schedule and Frequency

Monitoring Well	2014 Well Classification	2015 Well Classification	Proposed 1st Quarter 2015 to 4th Quarter 2015 Monitoring Program																
			VOCs (EPA 8260B)				Perchlorate (EPA 332.0)					1,4-Dioxane (EPA 8270 SIM)				RDX (EPA 8330)			
			2015				2015					2015				2015			
			1Q	2Q	3Q	4Q	1Q	2Q	3Q	4Q	Bi	1Q	2Q	3Q	4Q	1Q	2Q	3Q	4Q
TT-MW2-33B	R	R																	
TT-MW2-33C	R	R																	
TT-MW2-34B	R	R																	
TT-MW2-34C	R	R																	
TT-MW2-35B	R	R																	
TT-MW2-36B	R	R																	
TT-MW2-36C	R	R																	
TT-MW2-40C	R	R																	
TT-MW2-43	R	R																	
Piezometers (Not Sampled)																			
TT-MW2-41B	-	-																	
TT-MW2-42B	-	-																	
TT-PZ2-1	-	-																	
TT-PZ2-2	-	-																	
TT-PZ2-3	-	-																	
TT-PZ2-4	-	-																	
Extraction Wells (Not Sampled)																			
TT-EW2-1	-	-																	
TT-EW2-2	-	-																	
TT-EW2-3	-	-																	
TT-EW2-4	-	-																	
Totals	-	-	0	26	0	3	7	58	0	14	4	0	23	0	2	0	2	0	0
			29				83				25				2				
Notes:																			
EPA - United States Environmental Protection Agency										B - Background well									
VOCs - Volatile organic compounds										G - Guard well									
RDX - Hexahydro-1,3,5-trinitro-1,3,5-triazine										H - Horizontal extent well									
Highlighting indicates change in sampling frequency										I - Increasing contaminant trend well									
Bi - Biennial (sampled in even numbered years)										R - Redundant well									
										V - Vertical distribution well									

---

## **FIGURES**



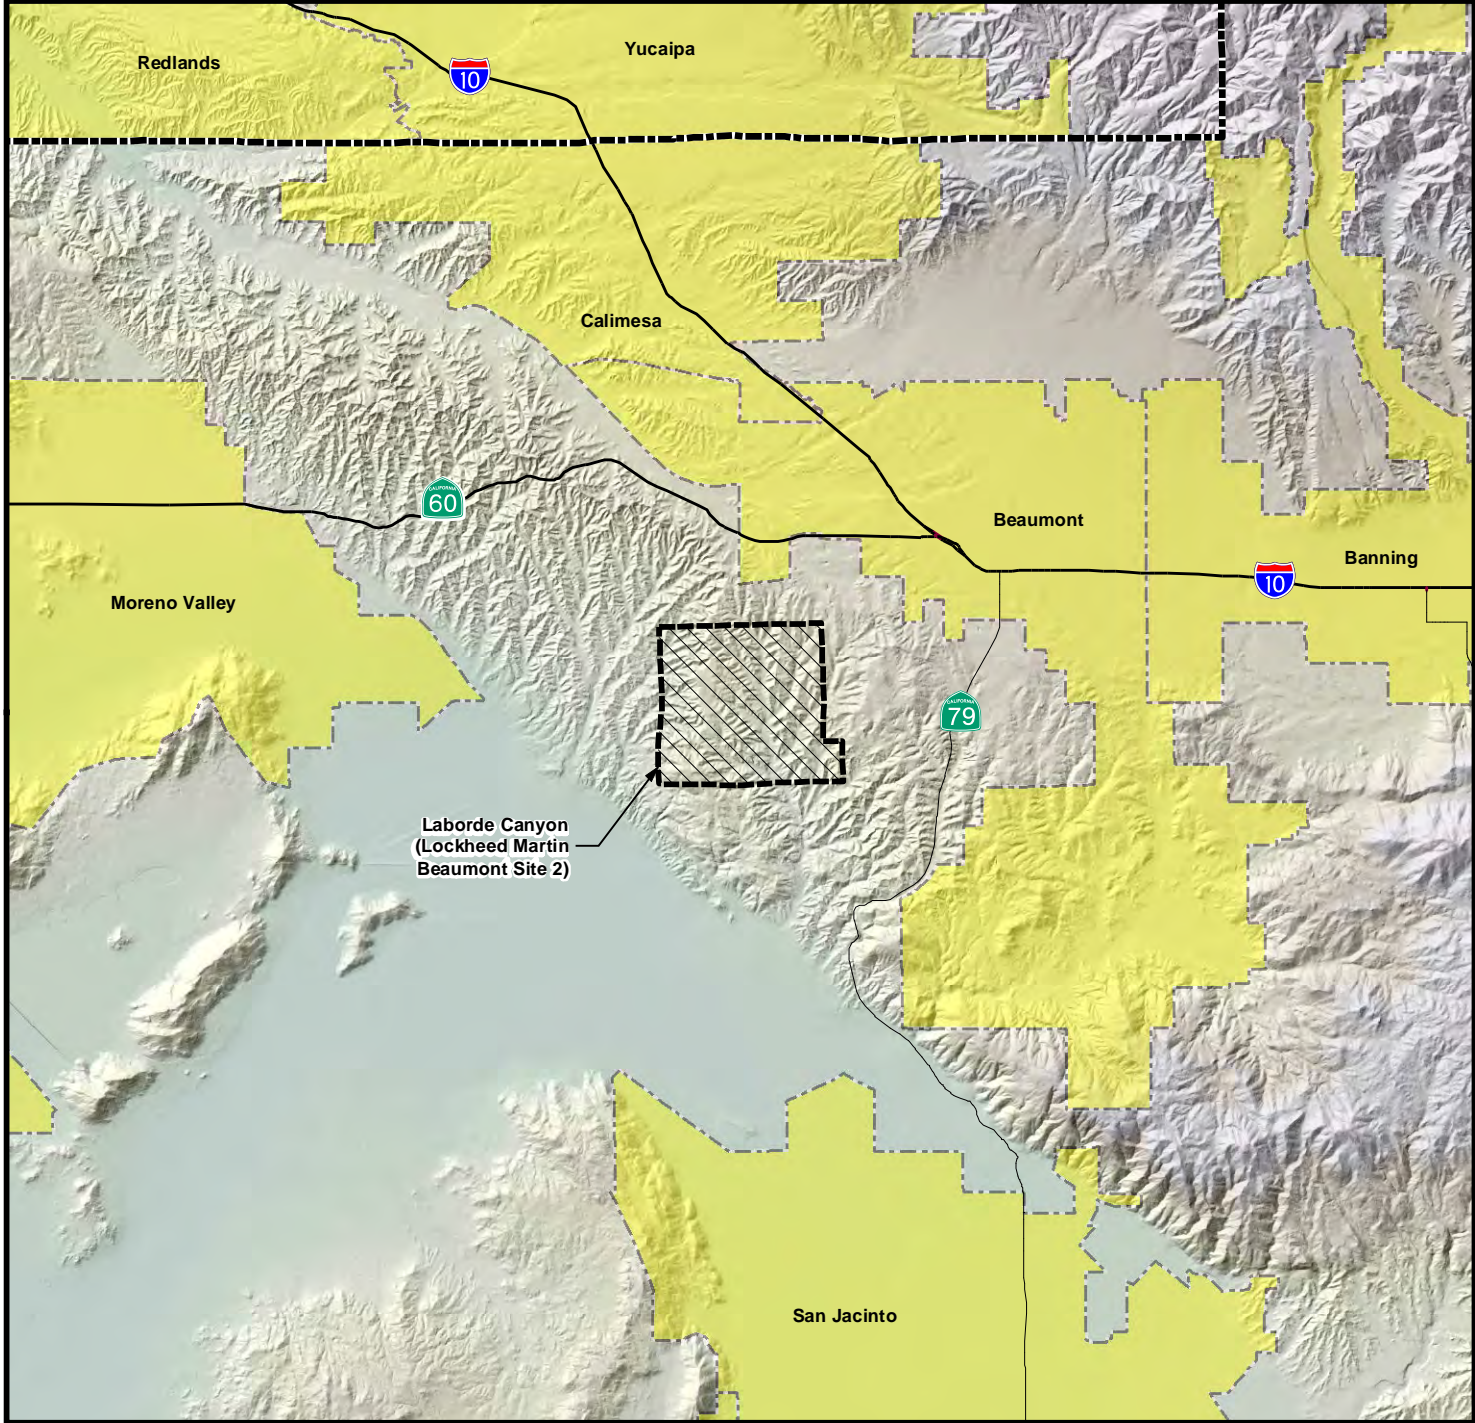

**Adapted from:**  
U.S. Census Bureau TIGER line data, 2000.


**LEGEND**

- Interstate/Freeway
- State Highway
- County Boundary
- Laborde Canyon Site Boundary  
(Lockheed Martin Beaumont Site 2)
- City/Municipality

Laborde Canyon  
(Lockheed Martin Beaumont Site 2)

**Figure 1**  
**Regional Location of**  
**Laborde Canyon**



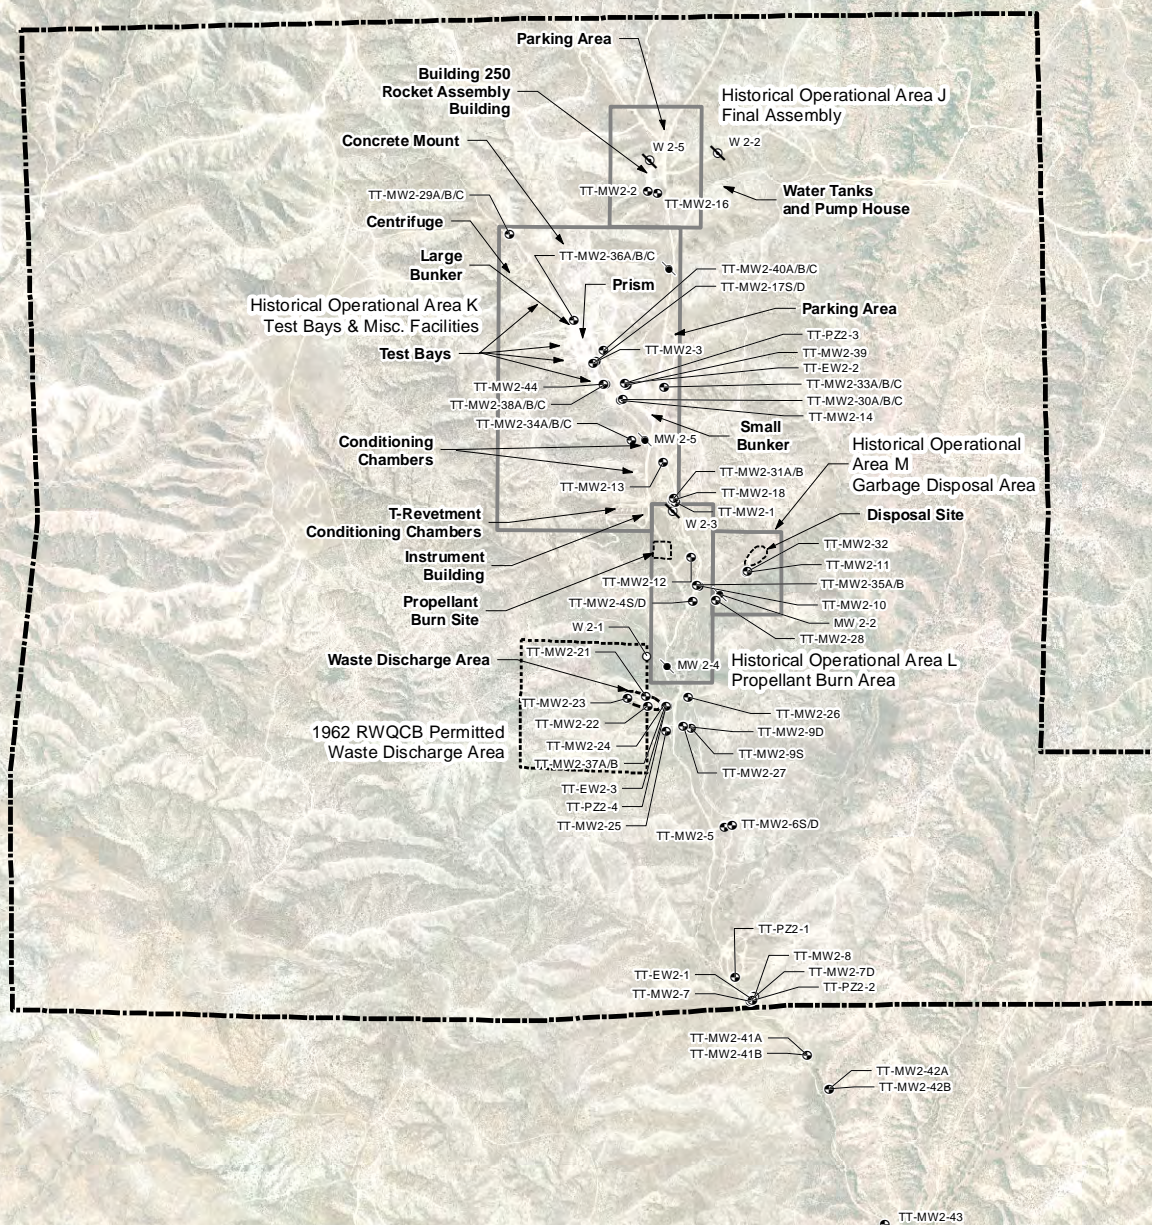

0 1,000 2,000  
Feet

Adapted from:  
March 2007 aerial photograph.

## LEGEND

- Groundwater Monitoring Well Location
- Destroyed Production Well Location
- Destroyed Monitoring Well Location
- Reported Production Well Location
- Waste Discharge Area
- RWQCB Permitted Waste Discharge Area
- Historical Operational Area Boundary
- Laborde Canyon Site Boundary (Lockheed Martin Beaumont Site 2)


Note: Laborde Canyon site boundary (Lockheed Martin Beaumont Site 2) from Hillwig-Goodrow survey, May 2004.

Disposal and Propellant Burn Site perimeters are estimated (Radian, 1986).

Laborde Canyon  
(Lockheed Martin Beaumont Site 2)

**Figure 2**  
**Historical Operational Areas**  
**and Site Features**



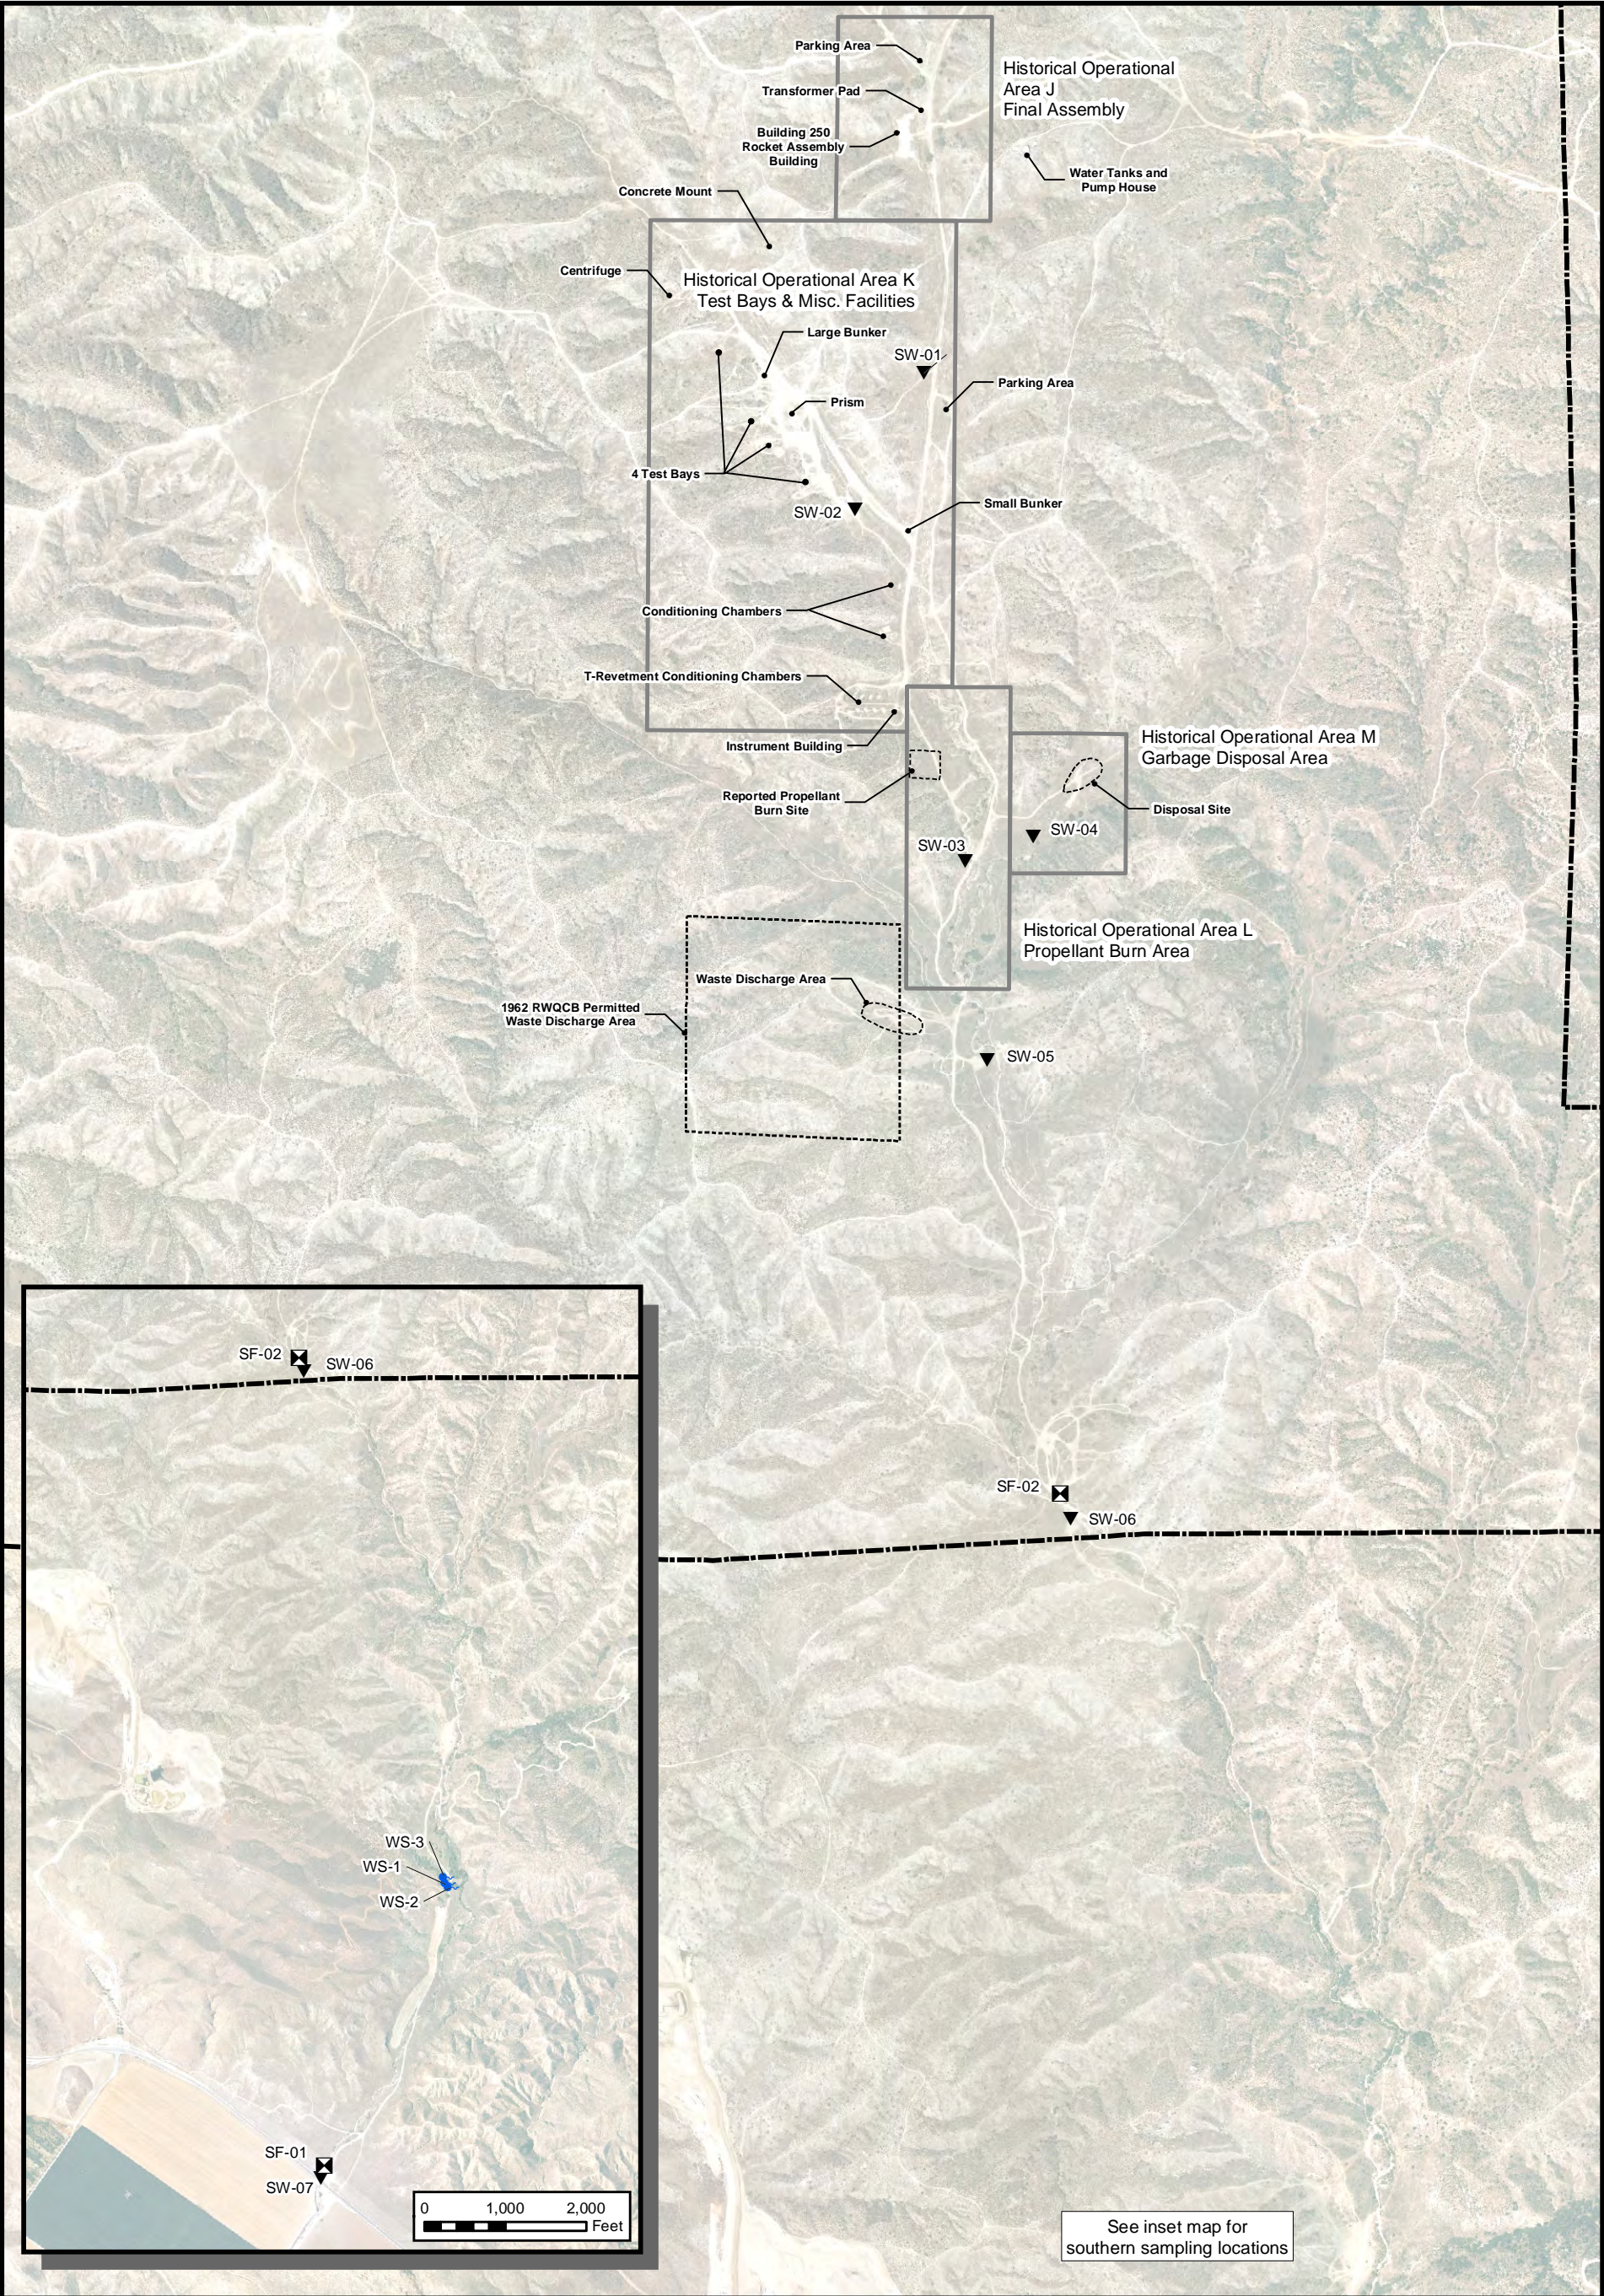

LEGEND

- ▼ Storm-Water Sampling Location
- Spring Sampling Location
- ⊠ Stream Flow Sampling Point

- ⬡ RWQCB Permitted Waste Discharge Area
- ⬢ Historical Operational Area Boundary
- ⬣ Laborde Canyon Property Boundary (Lockheed Martin Beaumont Site 2)



0 500 1,000 Feet

Adapted from: April 2007 aerial photograph  
Note: Laborde Canyon property boundary (Lockheed Martin Beaumont Site 2) from Hillwig-Goodrow survey, May 2004.


Laborde Canyon  
(Lockheed Martin Beaumont Site 2)

**Figure 3**  
**Surface and Storm-Water Sampling Locations**





P:\GIS\Lockheed\_S2\_Q2Q314\Samp\_Locs\_Q214.mxd

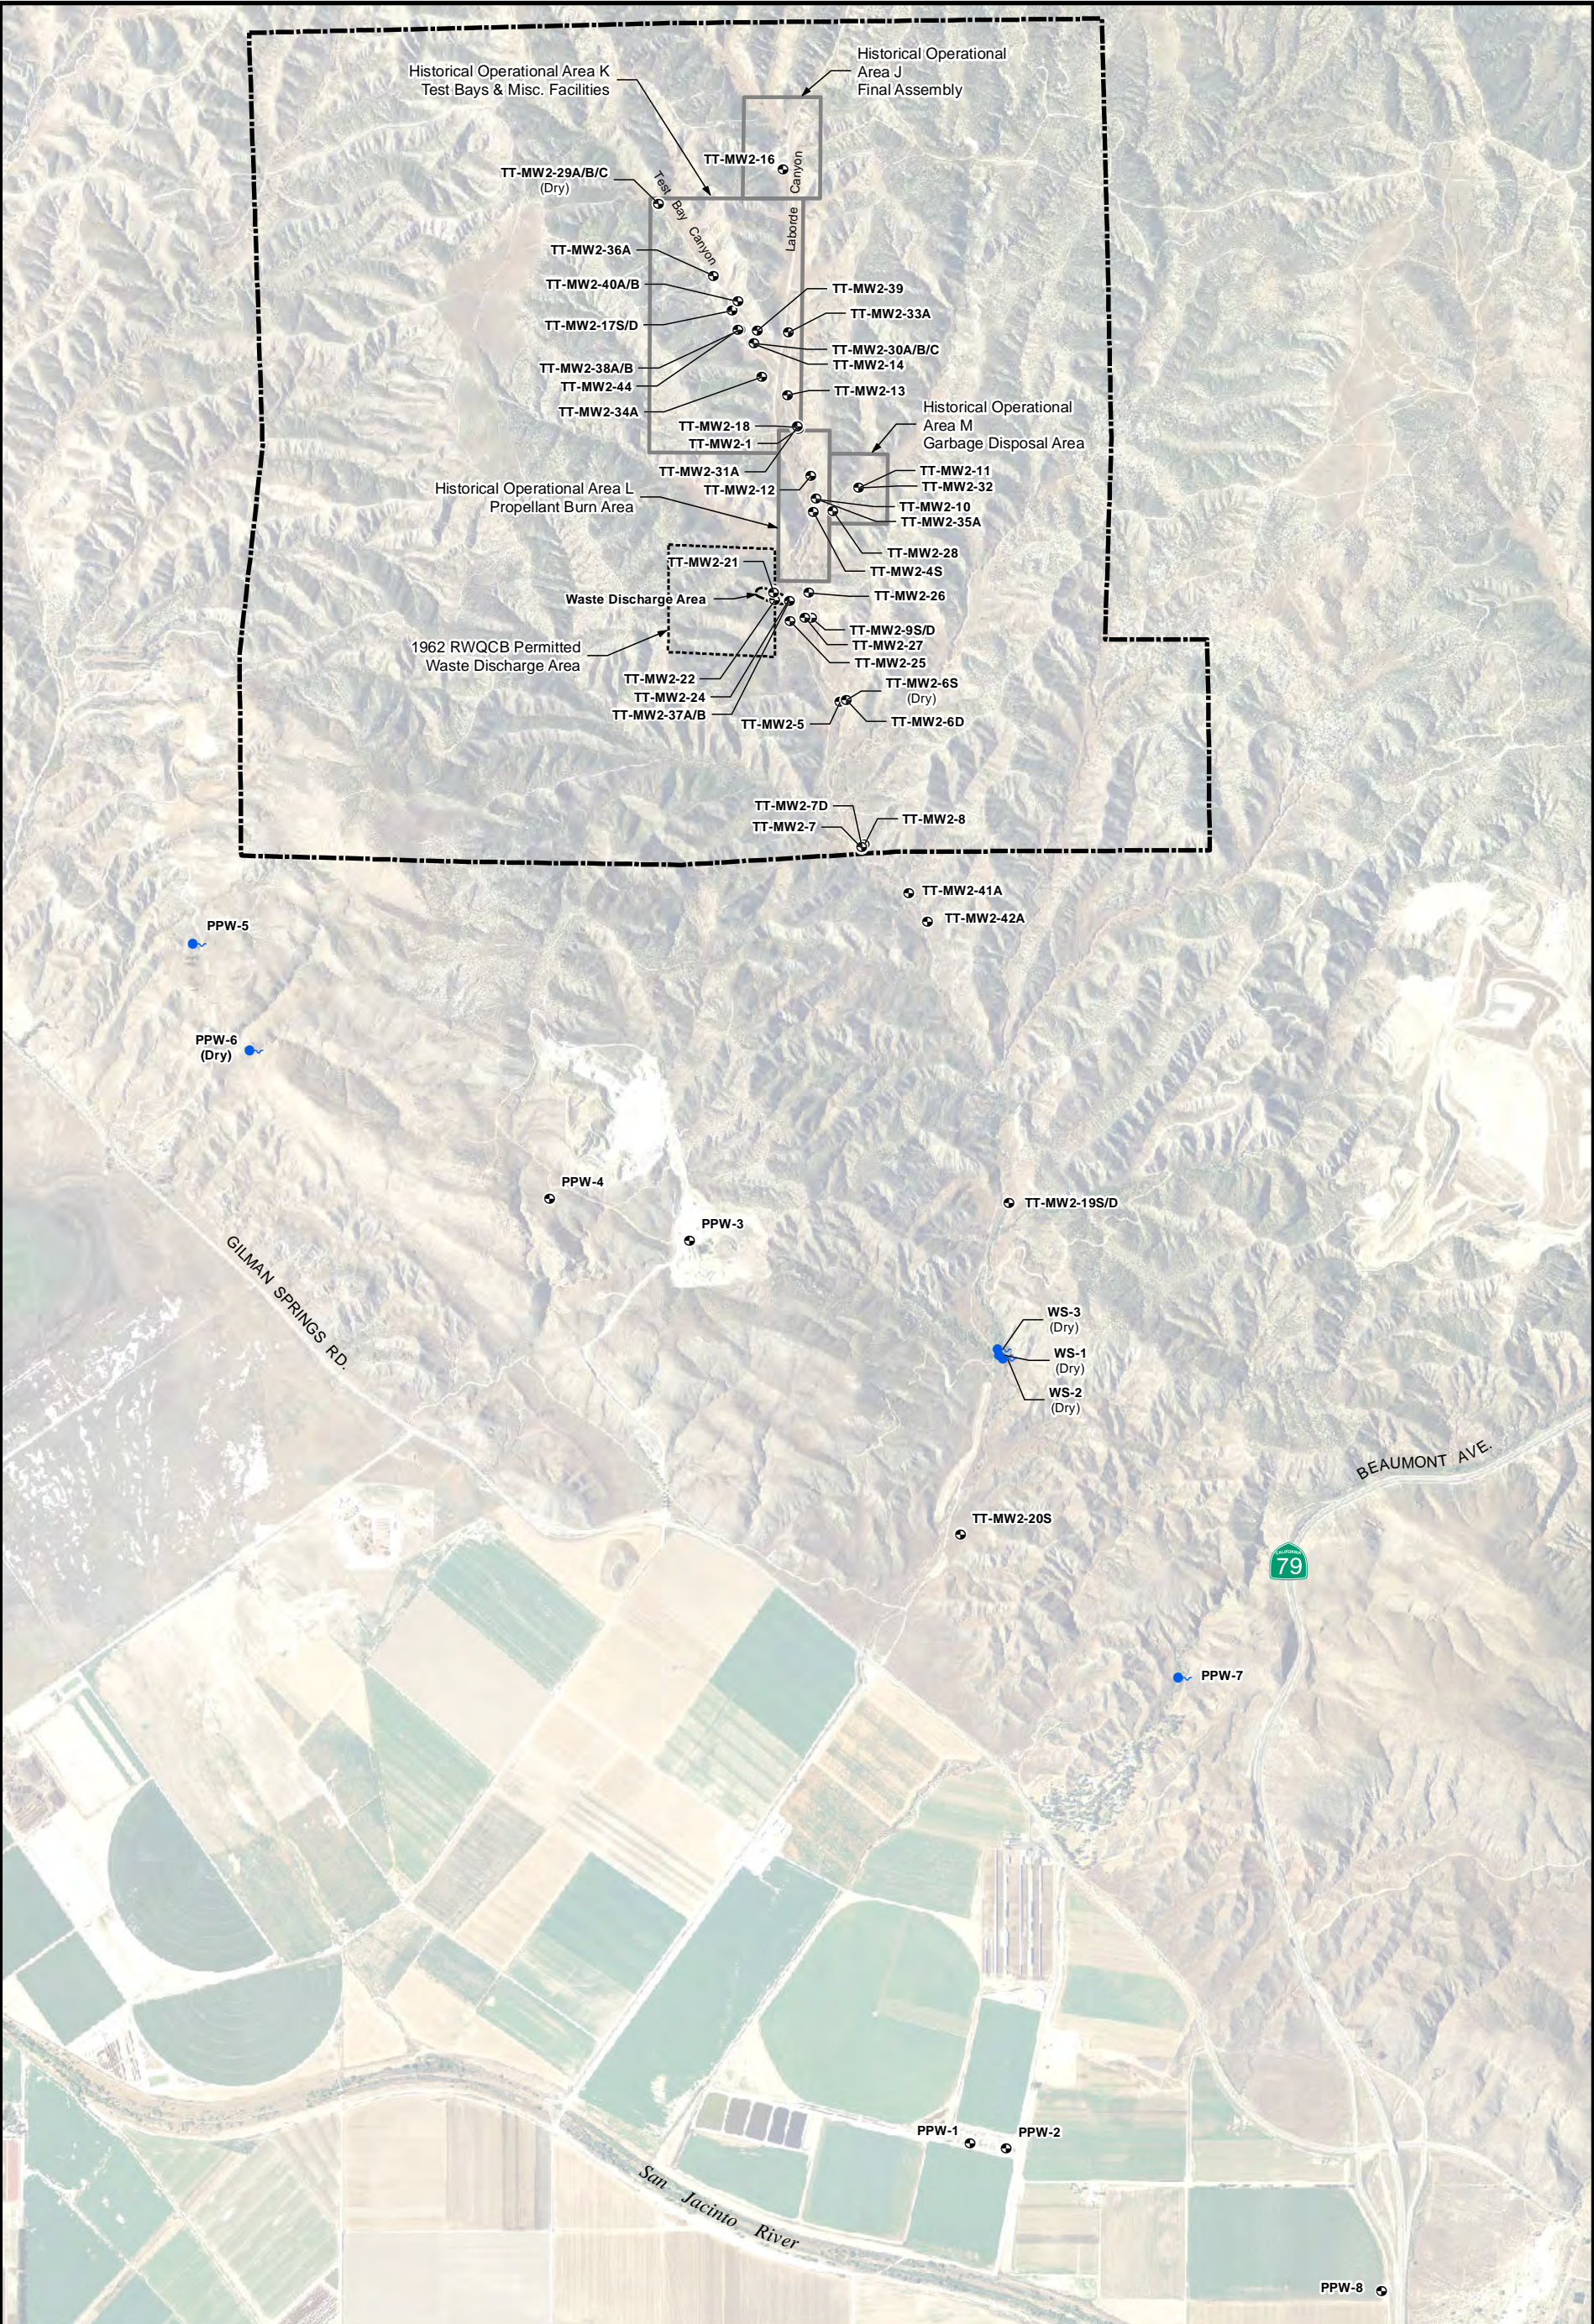


LEGEND

- Well
- Spring
- 1962 RWQCB Permitted Waste Discharge Area
- Historical Operational Area Boundary
- Laborde Canyon Site Boundary (Lockheed Martin Beaumont Site 2)

Adapted from:  
April 2012 aerial photograph.

Note:  
Beaumont Site 2 property boundary from  
Hillwig-Goodrow survey, May 2004.




Laborde Canyon  
(Lockheed Martin Beaumont Site 2)

Figure 4  
Second Quarter 2014  
Sampling Locations





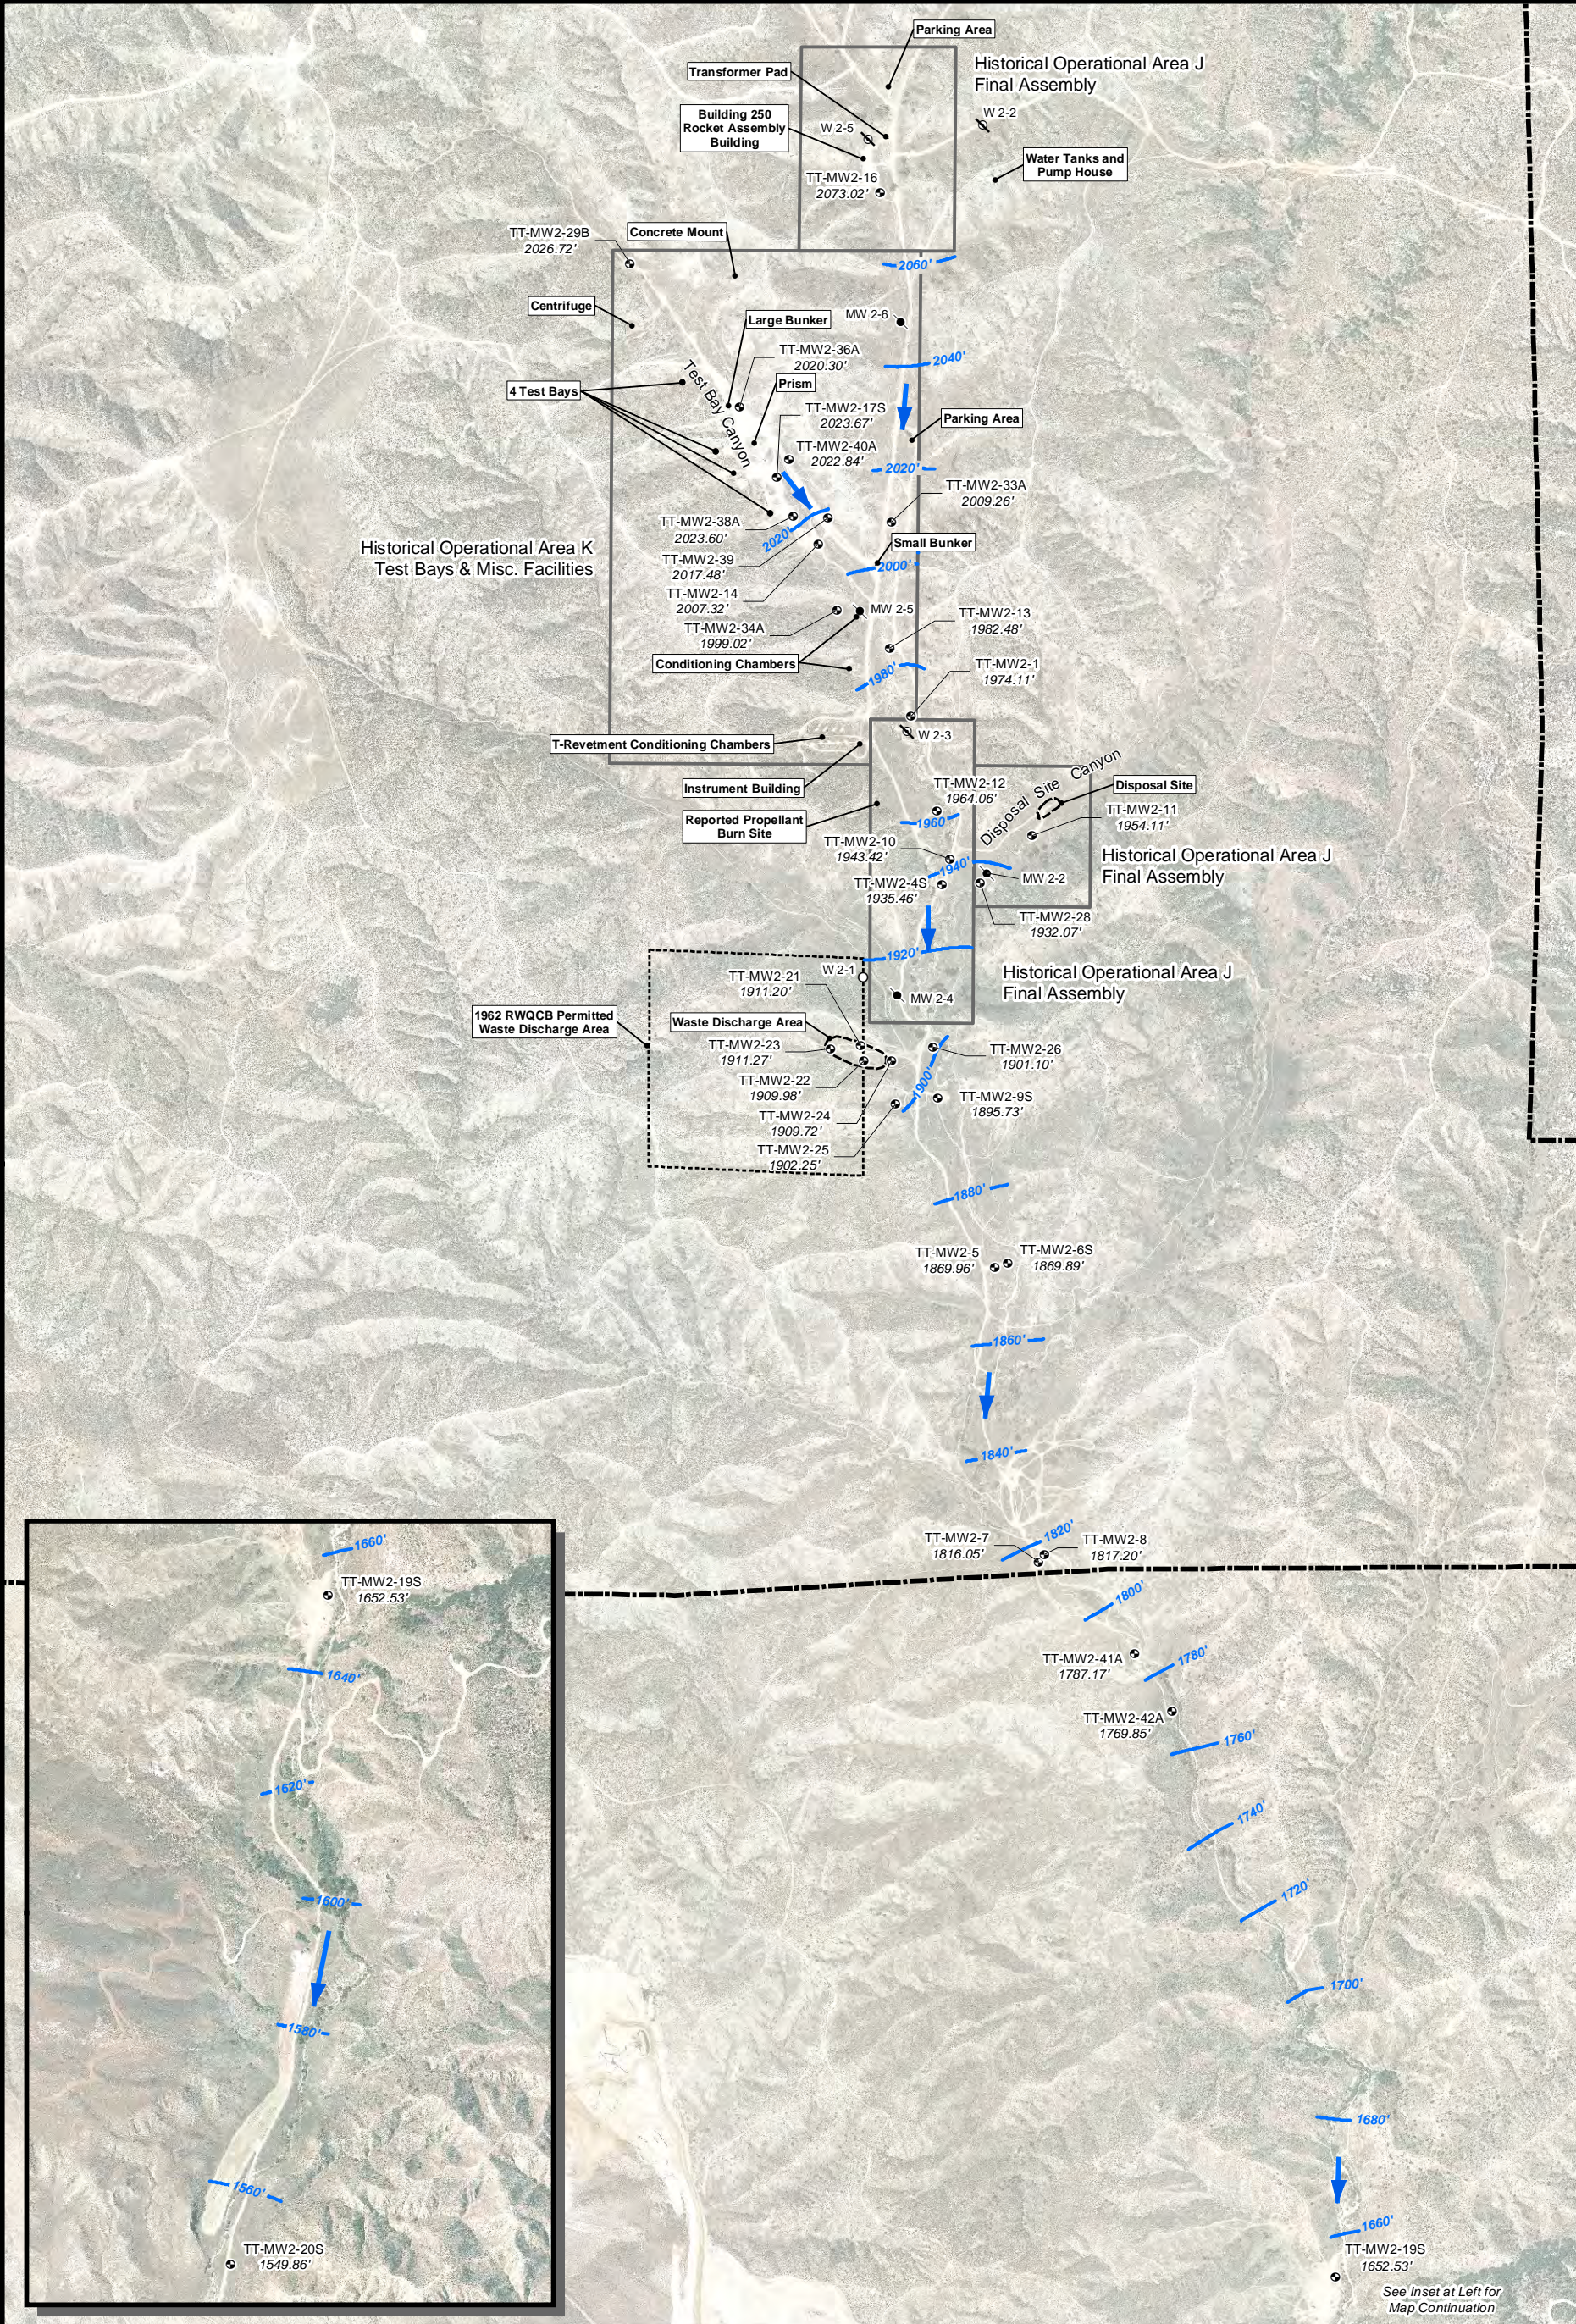

LEGEND

- Monitoring Well Location with Groundwater Elevation (feet msl)
- Destroyed Production Well Location
- Destroyed Monitoring Well Location
- Reported Production Well Location
- Groundwater Elevation Contour (feet msl)
- Groundwater Flow Direction
- RWQCB Permitted Waste Discharge Area
- Historical Operational Area Boundary
- Laborde Canyon Site Boundary (Lockheed Martin Beaumont Site 2)

0 500 1,000 Feet

Adapted from: April 2007 aerial photograph

Faults from the, Site 2 Lineament Study, Tetra Tech, 2009

Notes: msl - mean sea level.

Laborde Canyon property boundary (Lockheed Martin Beaumont Site 2) from Hillwig-Goodrow survey, May 2004




Laborde Canyon  
(Lockheed Martin Beaumont Site 2)

**Figure 5**  
**Groundwater Contours for First Groundwater - Second Quarter 2014**





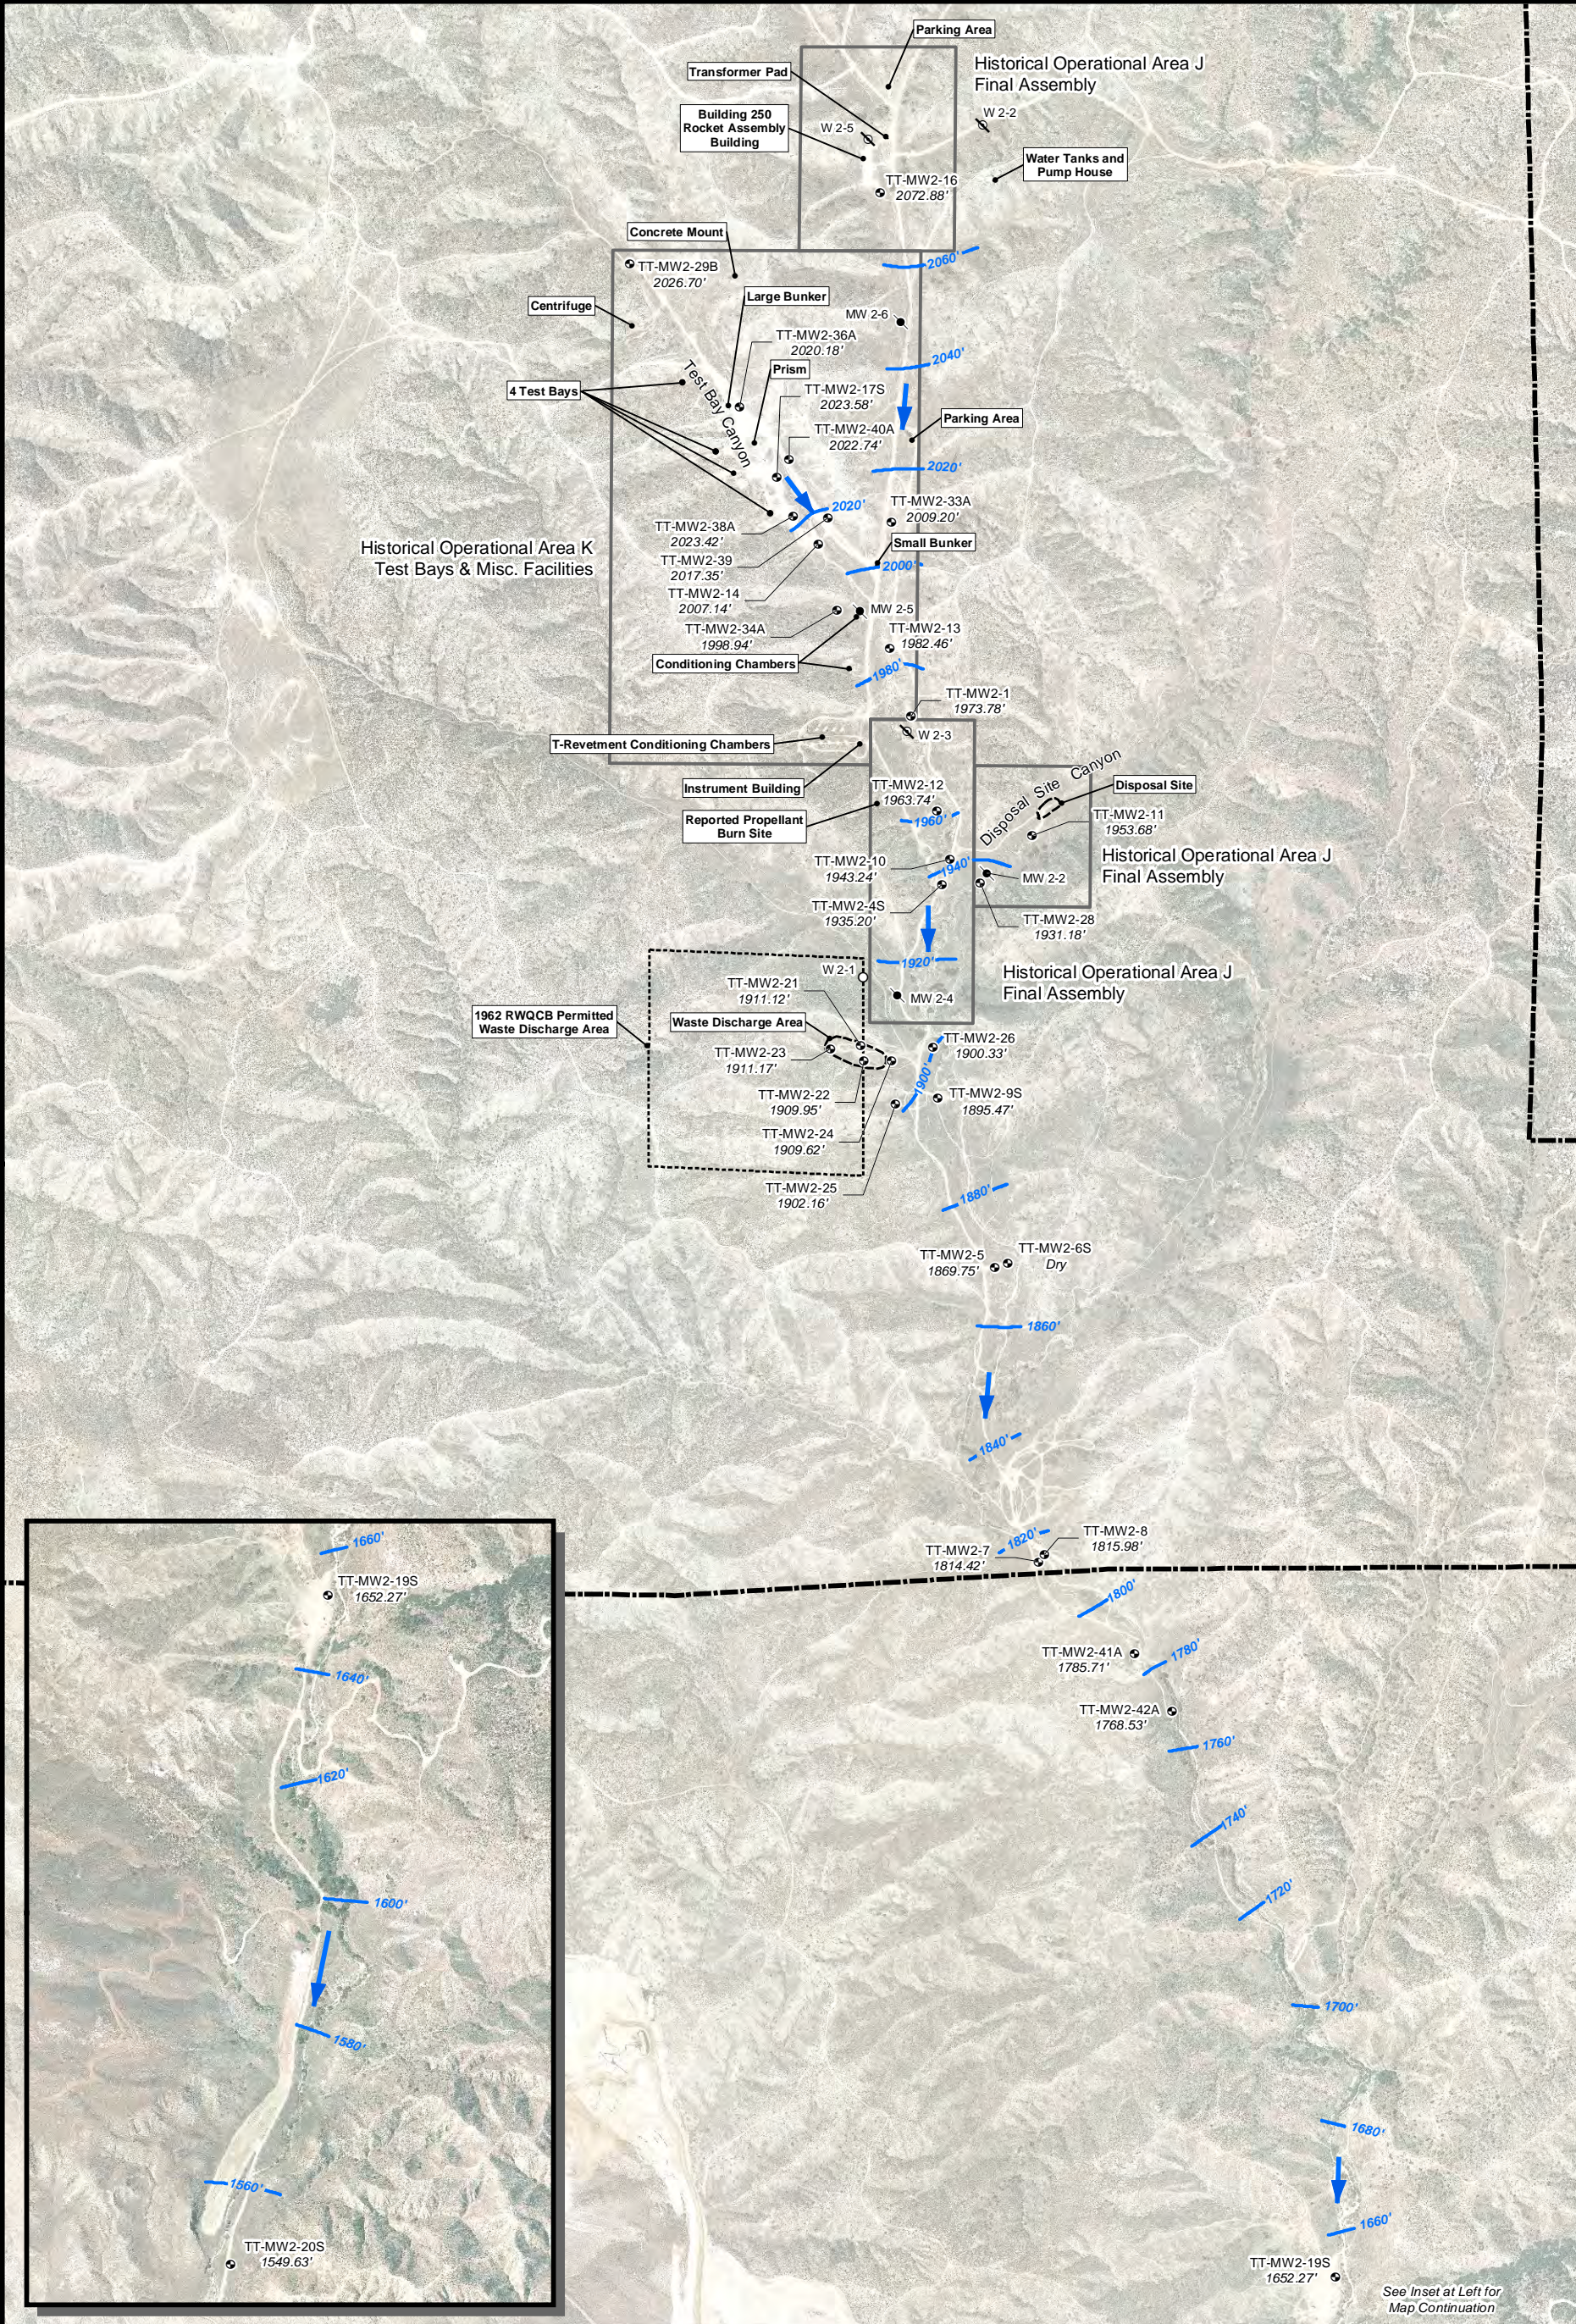

LEGEND

- Monitoring Well Location with Groundwater Elevation (feet msl)
- Destroyed Production Well Location
- Destroyed Monitoring Well Location
- Reported Production Well Location
- Groundwater Elevation Contour (feet msl)
- Groundwater Flow Direction

- RWQCB Permitted Waste Discharge Area
- Historical Operational Area Boundary
- Laborde Canyon Site Boundary (Lockheed Martin Beaumont Site 2)

0 500 1,000 Feet

Adapted from: April 2007 aerial photograph

Faults from the, Site 2 Lineament Study, Tetra Tech, 2009

Notes: msl - mean sea level.


Laborde Canyon property boundary (Lockheed Martin Beaumont Site 2) from Hillwig-Goodrow survey, May 2004

Laborde Canyon  
(Lockheed Martin Beaumont Site 2)

**Figure 6**  
**Groundwater Contours for**  
**First Groundwater -**  
**Third Quarter 2014**

**TETRA TECH**



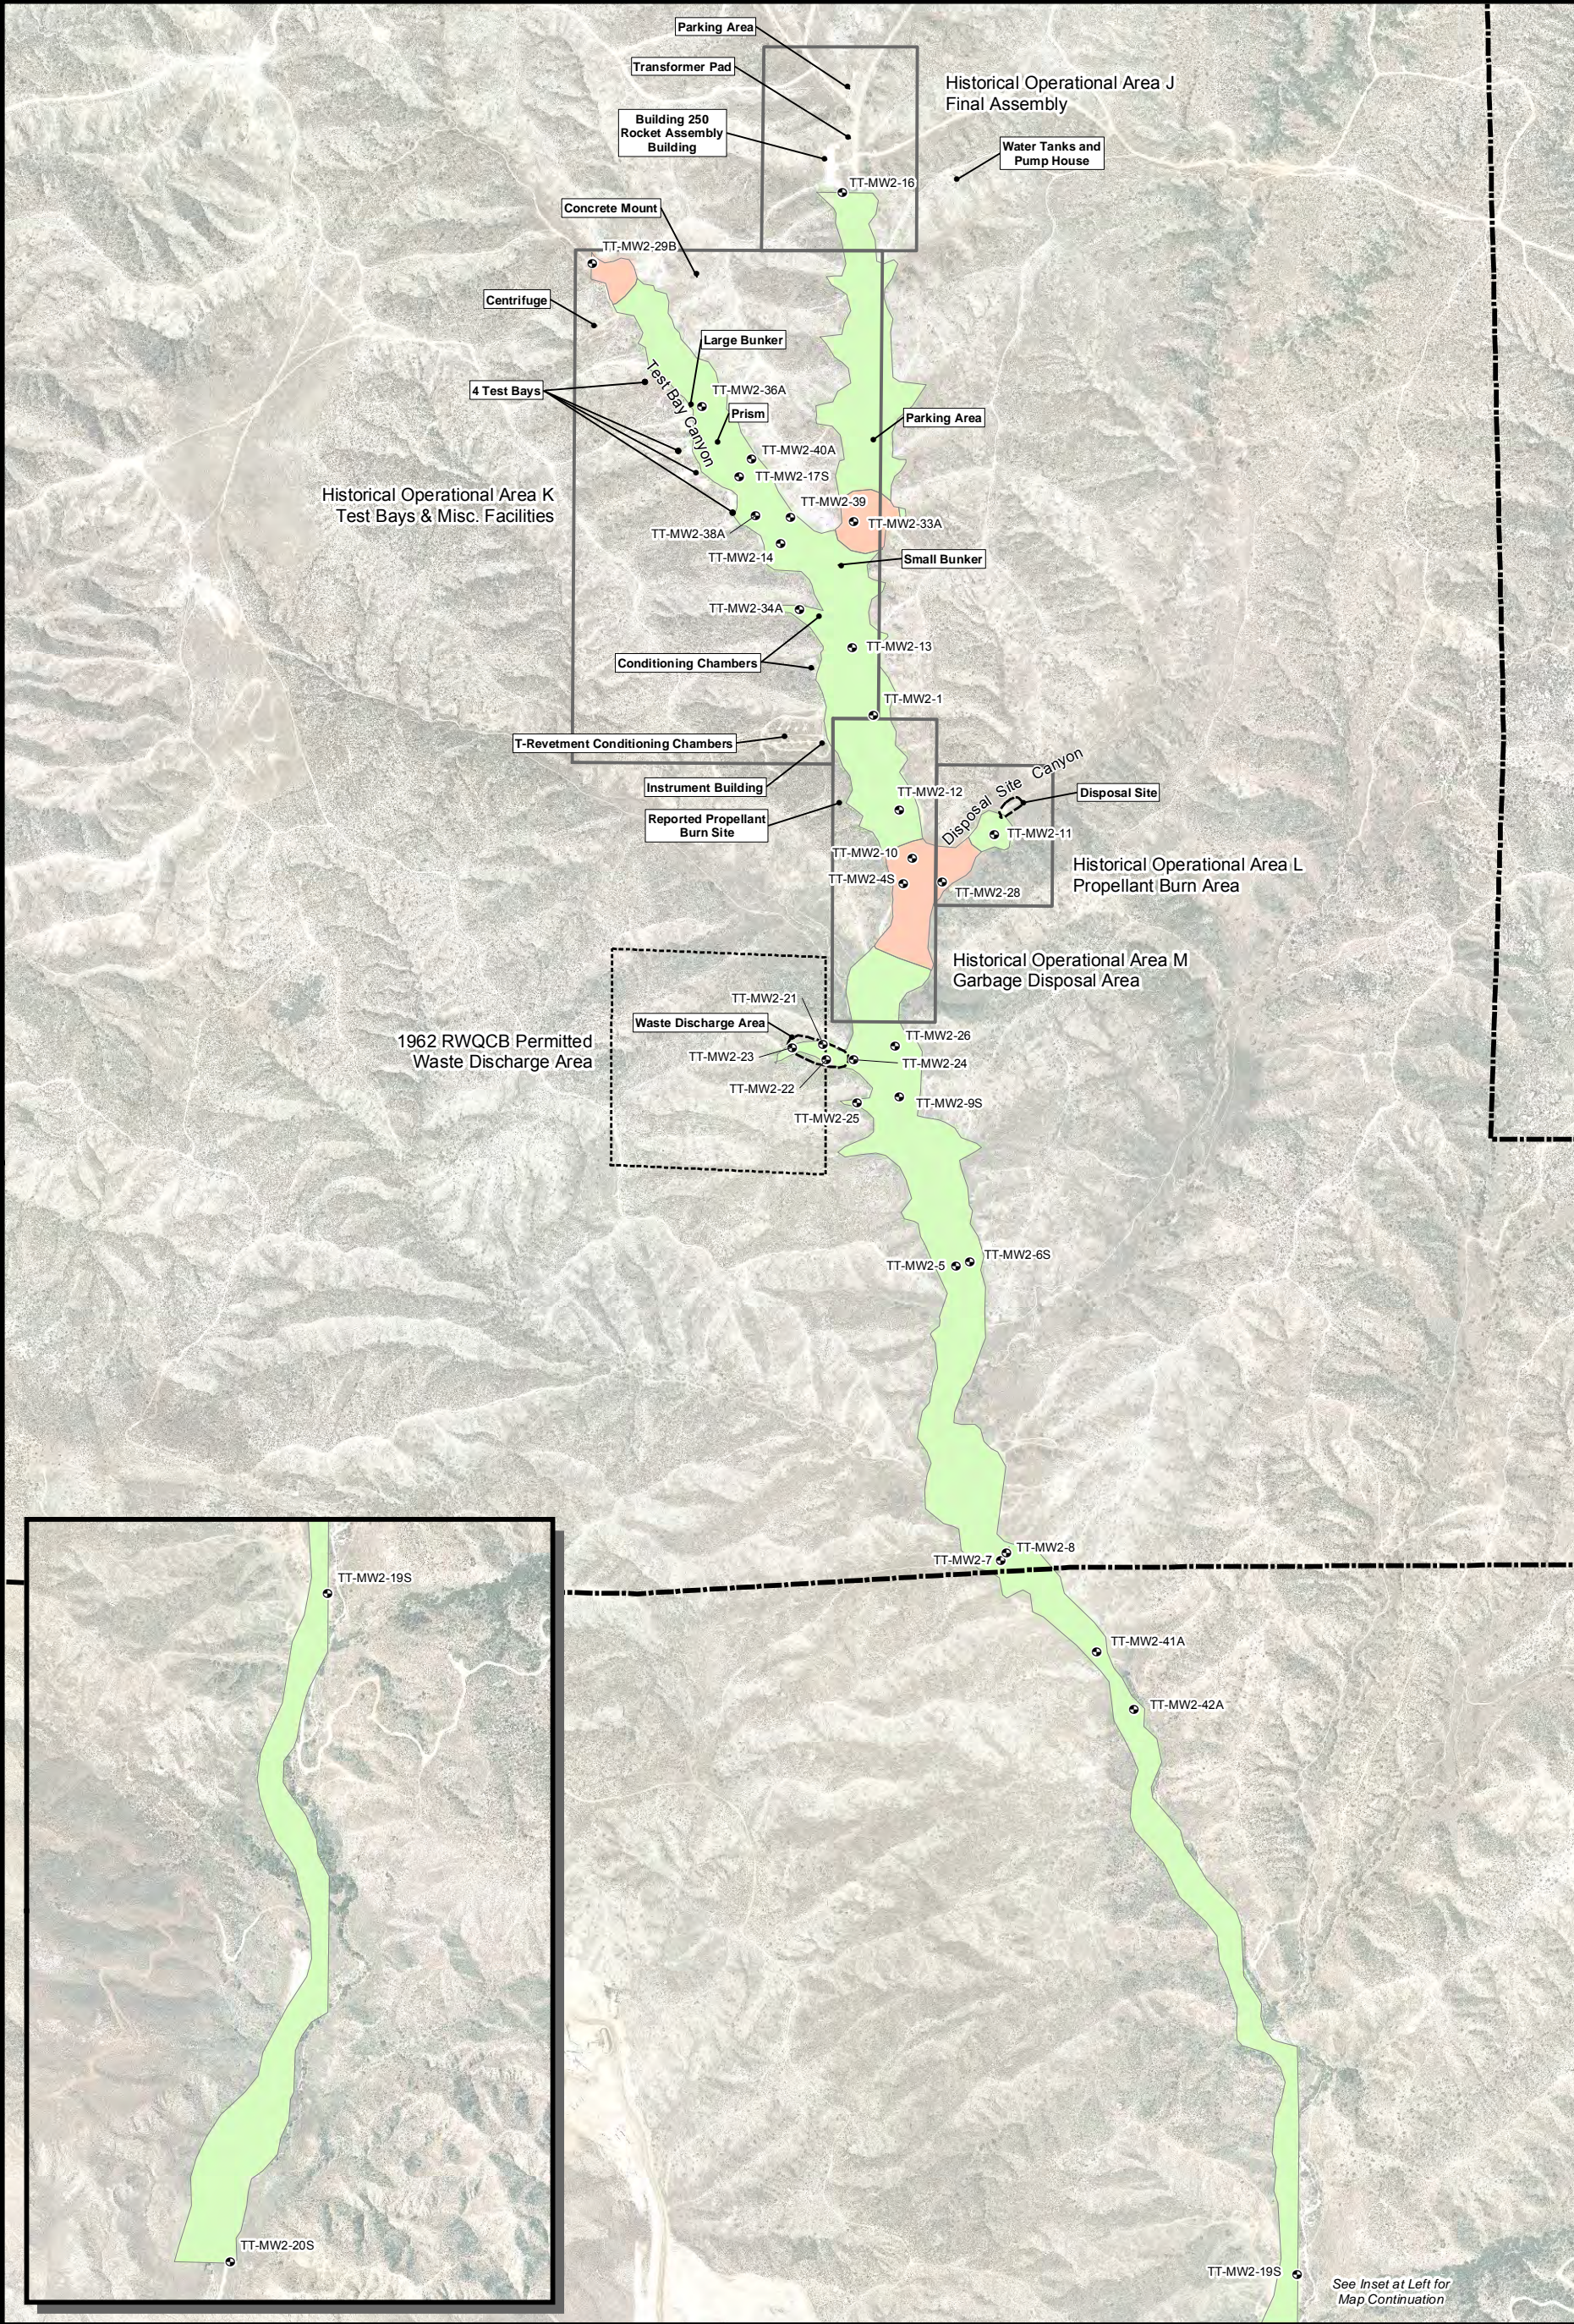

LEGEND

- Monitoring Well Location
- RWQCB Permitted Waste Discharge Area
- Historical Operational Area Boundary
- Laborde Canyon Site Boundary (Lockheed Martin Beaumont Site 2)

Groundwater Elevation Change in Feet (from previous quarter)

- 0 — 1
- 0.99 — 0

0 500 1,000 Feet


Adapted from: April 2007 aerial photograph

Notes: Laborde Canyon property boundary (Lockheed Martin Beaumont Site 2) from Hillwig-Goodrow survey, May 2004

Laborde Canyon (Lockheed Martin Beaumont Site 2)

**Figure 7**  
**Changes in**  
**Groundwater Elevation -**  
**Second Quarter 2014**



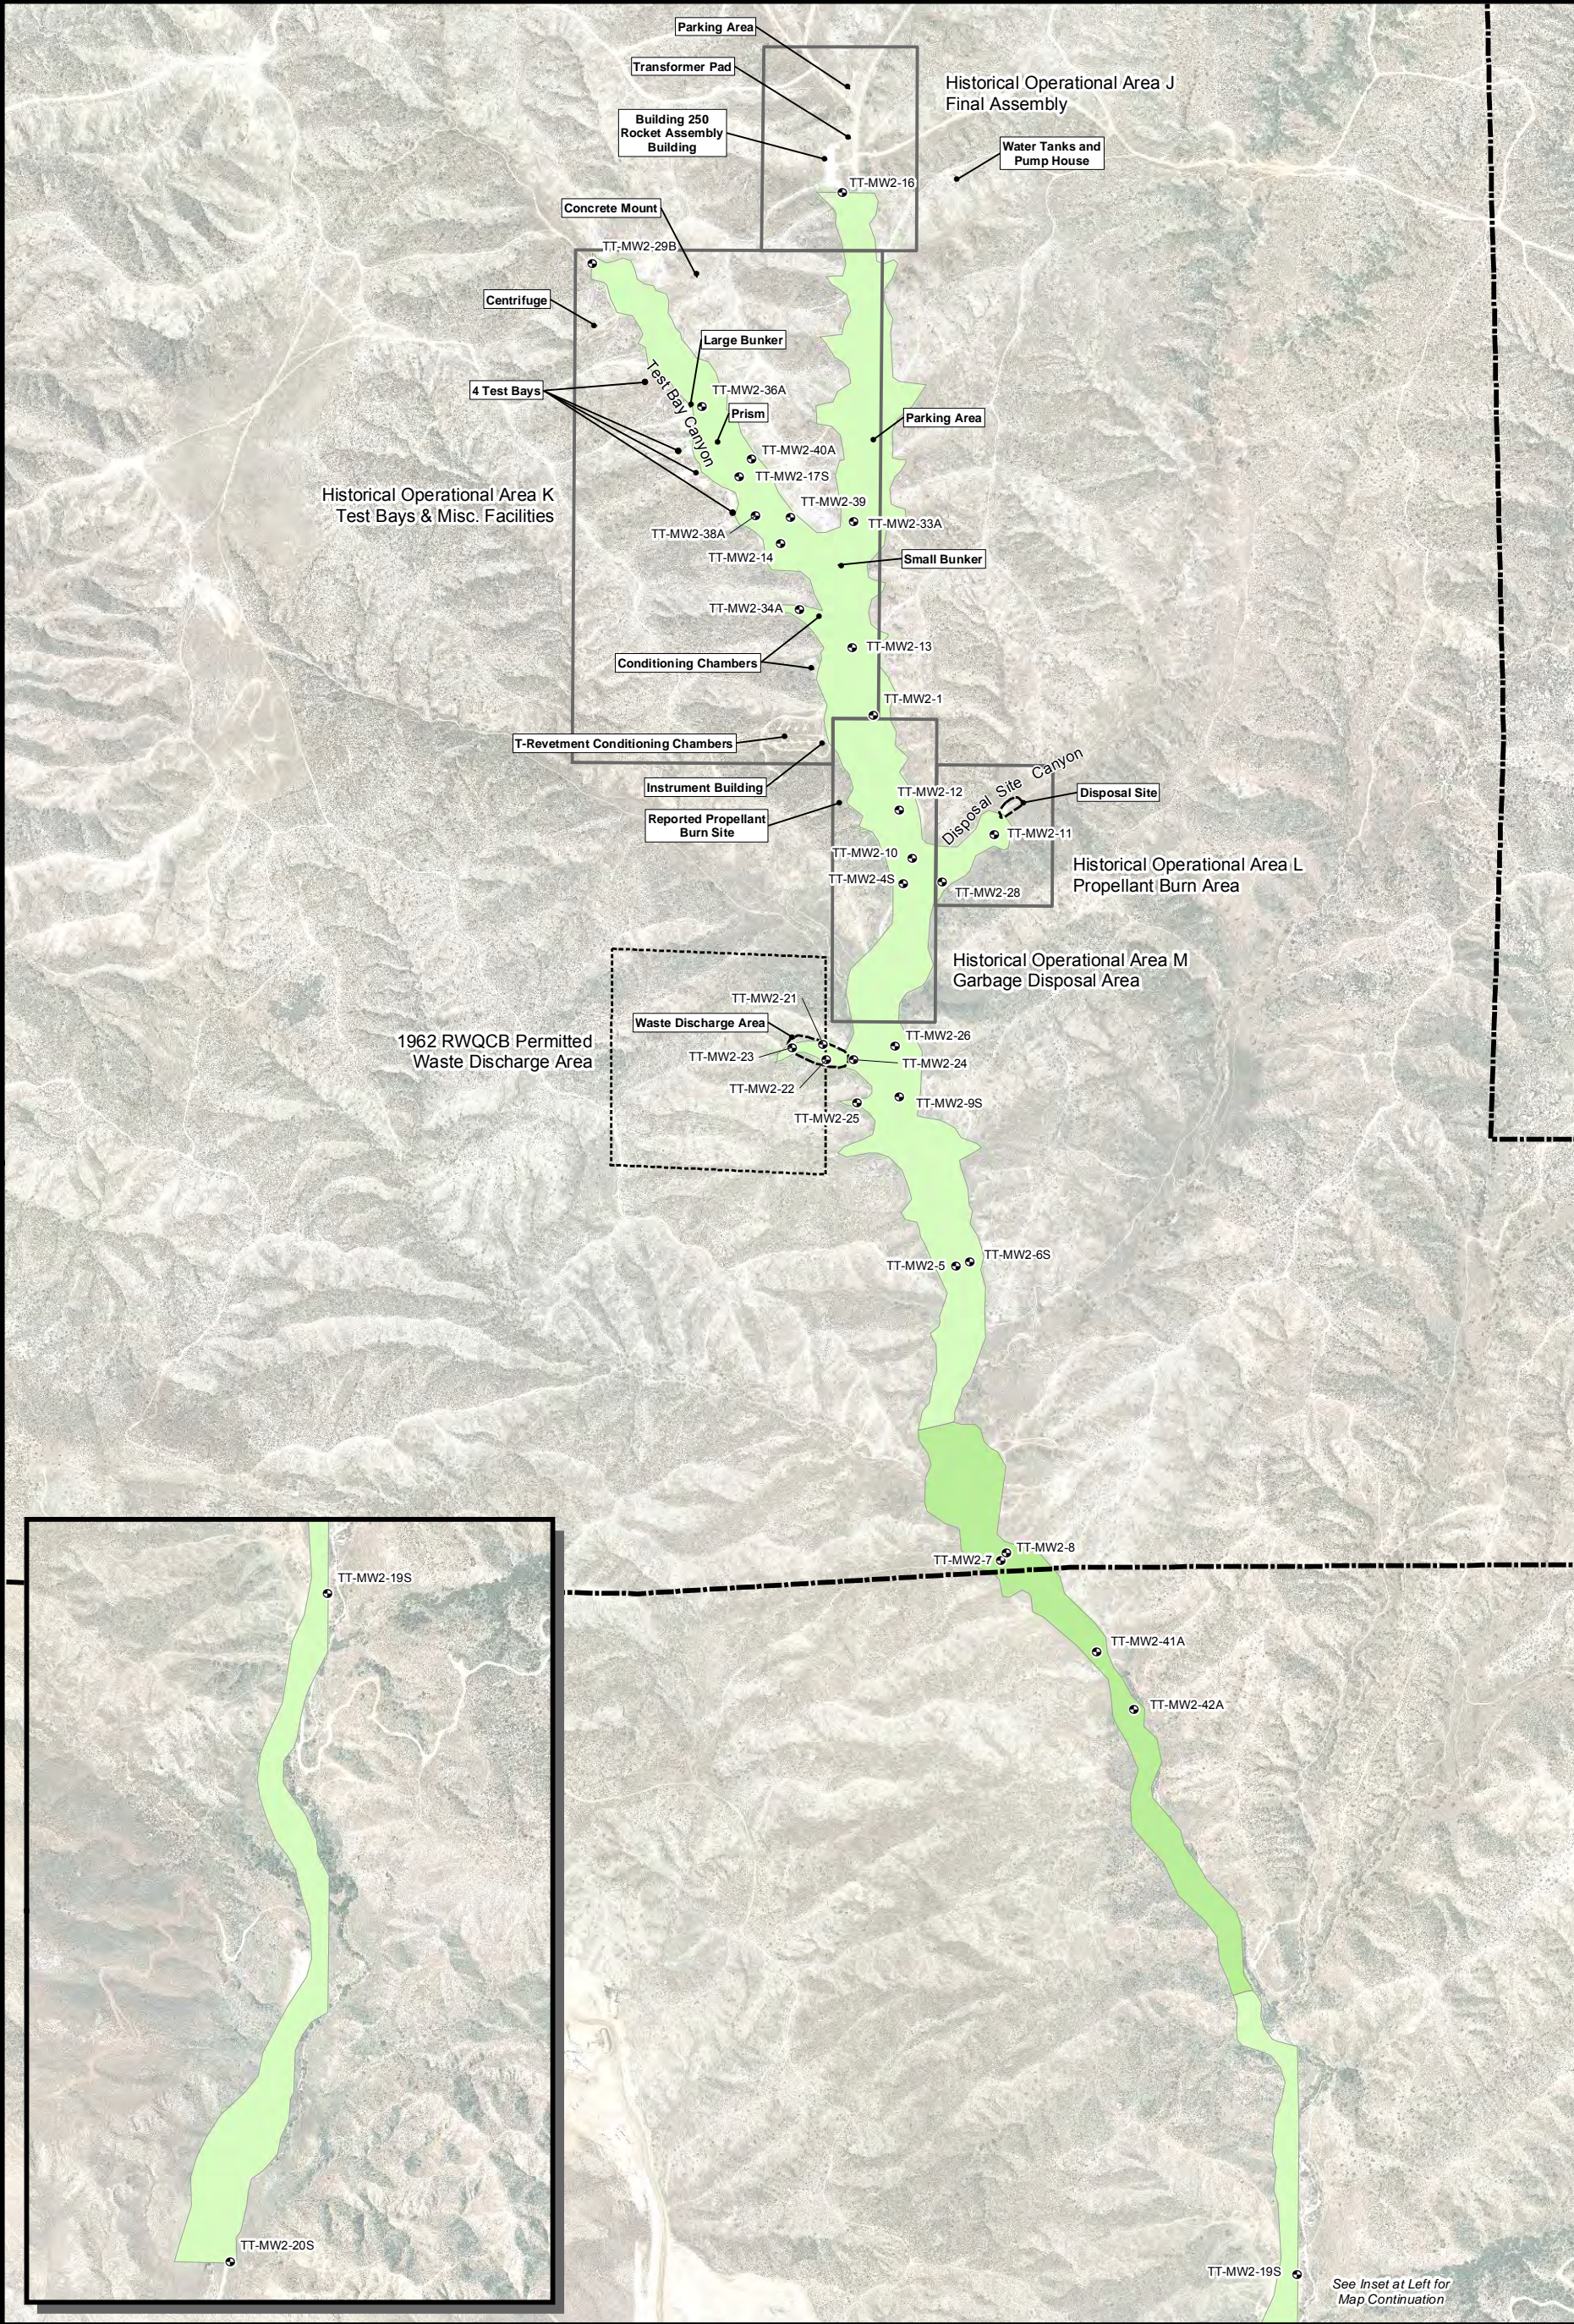

LEGEND

- Monitoring Well Location
- RWQCB Permitted Waste Discharge Area
- Historical Operational Area Boundary
- Laborde Canyon Site Boundary (Lockheed Martin Beaumont Site 2)

Groundwater Elevation Change in Feet (from previous quarter)

1 — 2
0 — 1

0 500 1,000 Feet


Adapted from: April 2007 aerial photograph

Notes: Laborde Canyon property boundary (Lockheed Martin Beaumont Site 2) from Hillwig-Goodrow survey, May 2004

Laborde Canyon (Lockheed Martin Beaumont Site 2)

**Figure 8**  
**Changes in**  
**Groundwater Elevation -**  
**Third Quarter 2014**



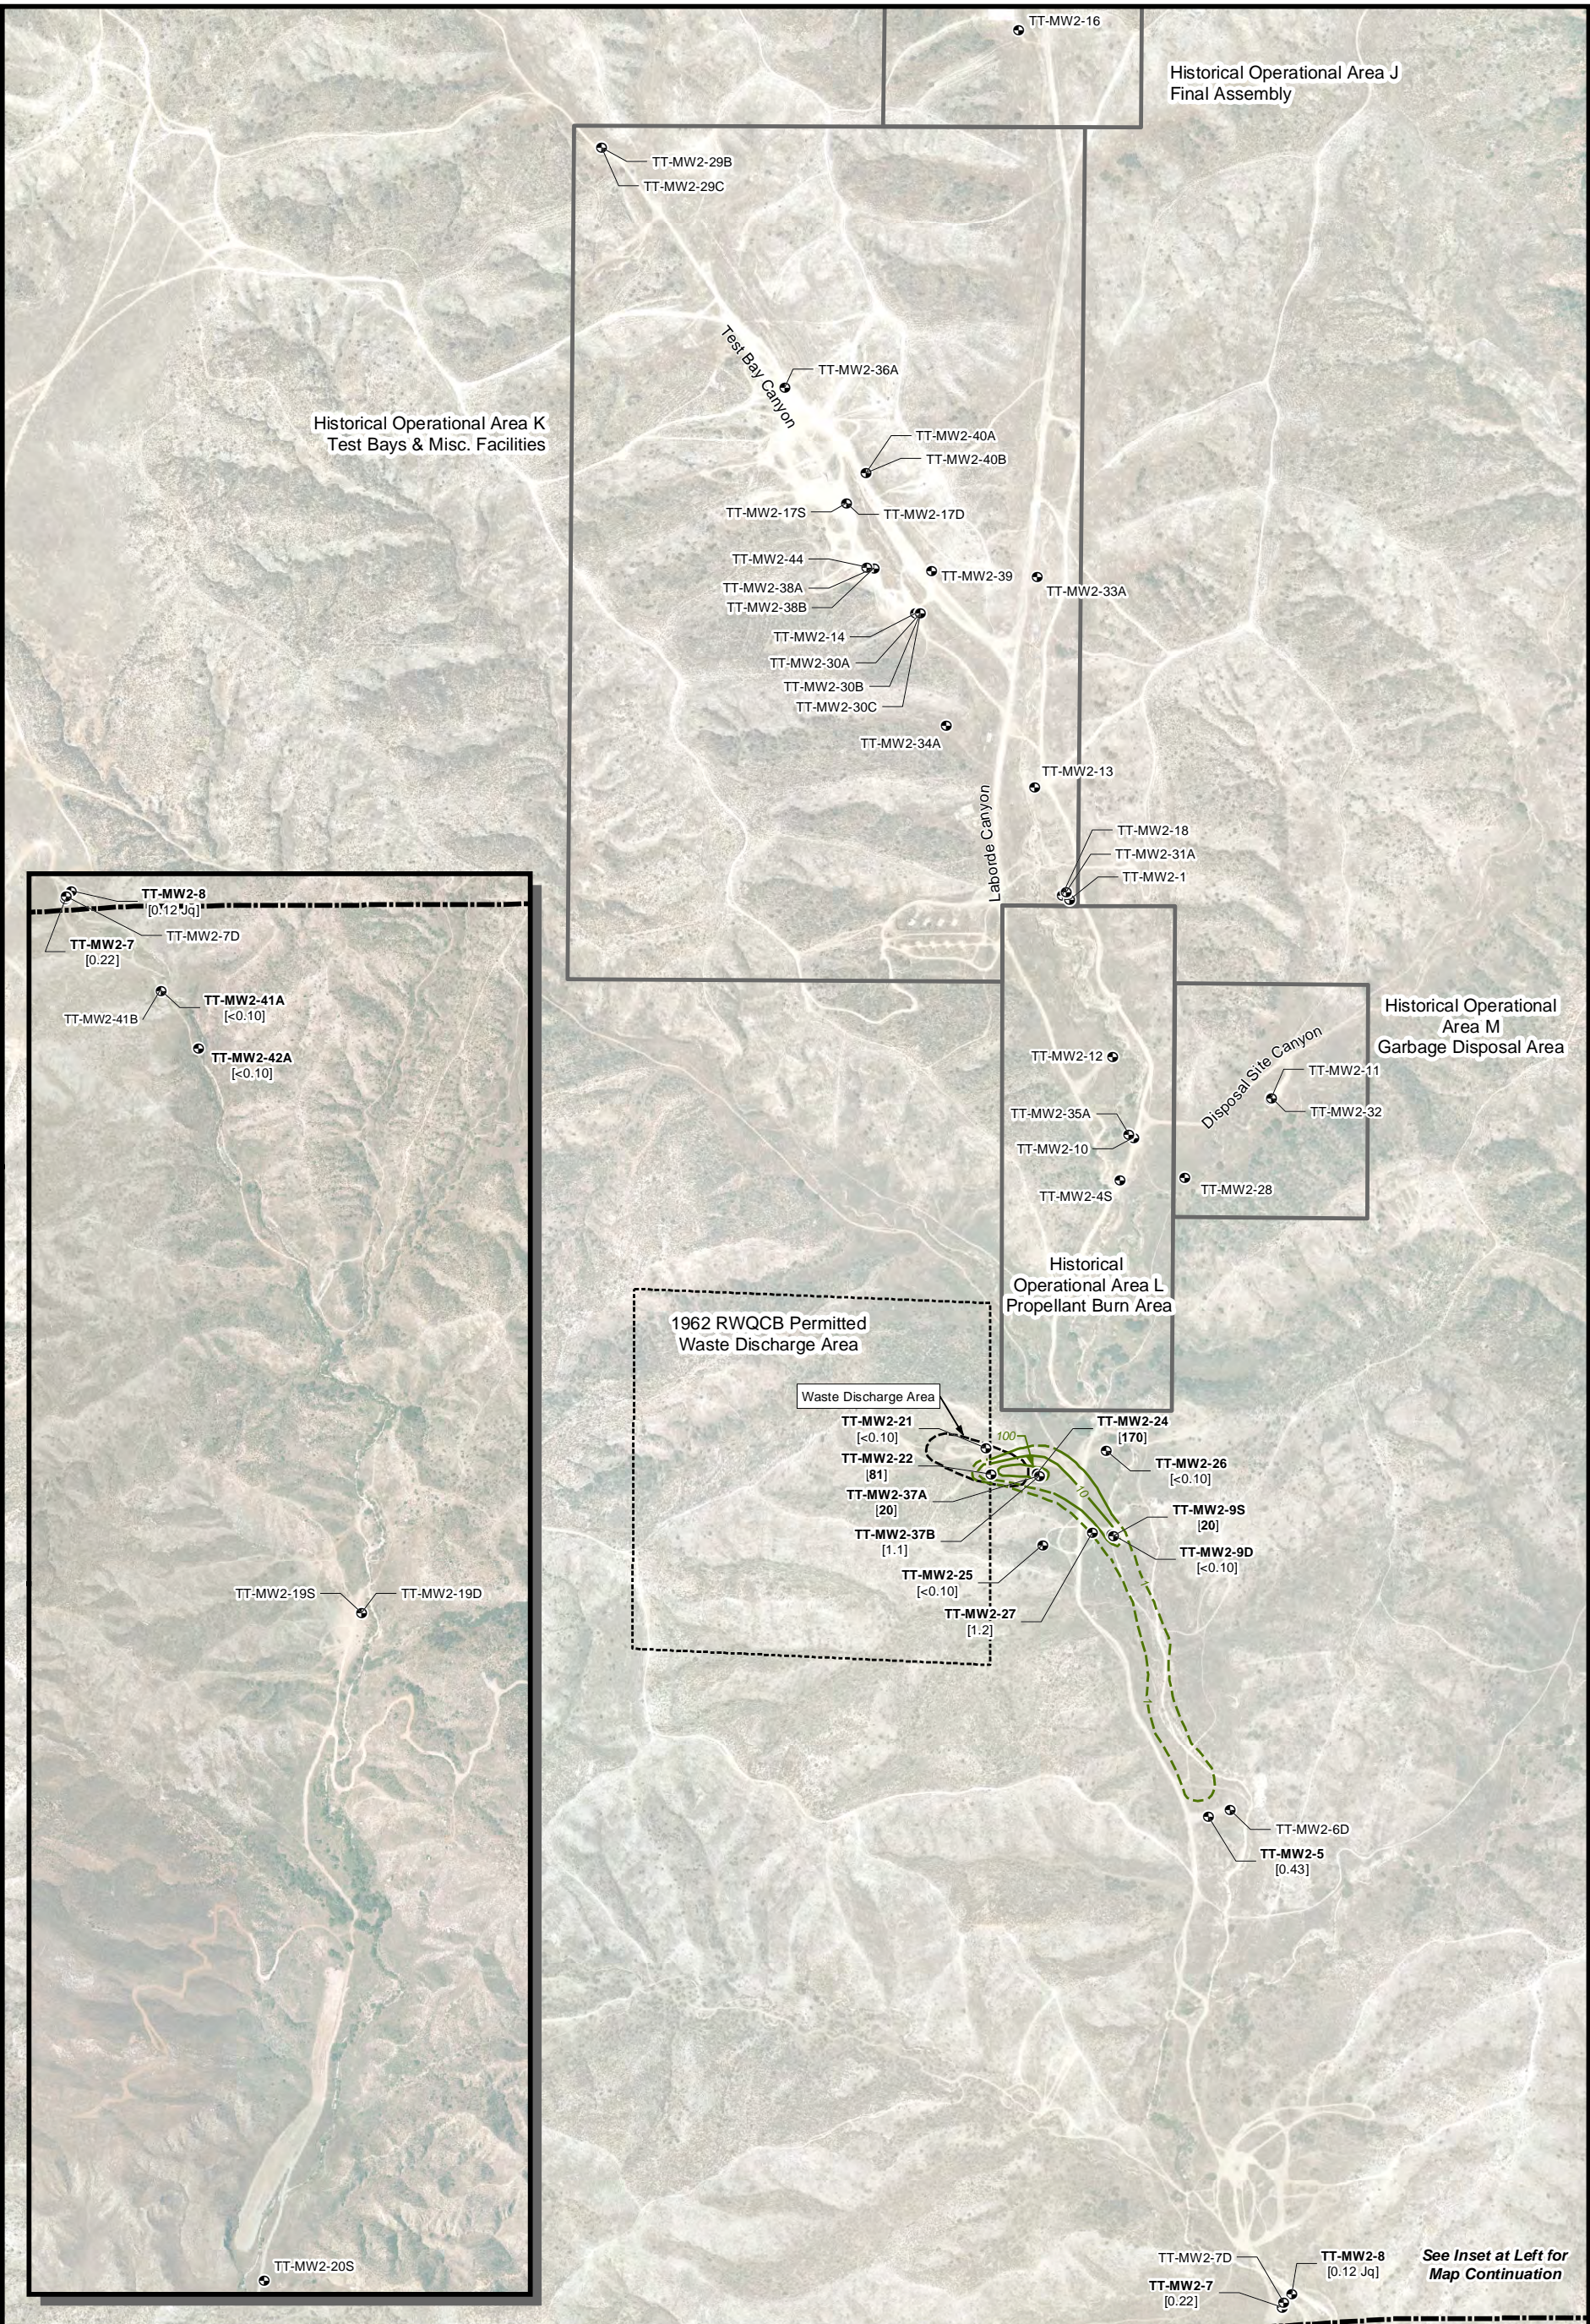

LEGEND

- Well Location with 1,4-Dioxane Concentration (µg/L)
- 1,4-Dioxane Isoconcentration Contour (Dashed where inferred)
- Waste Discharge Area
- RWQCB Permitted Waste Discharge Area



Historical Operational Area Boundary  
Laborde Canyon Site Boundary  
(Lockheed Martin Beaumont Site 2)

Notes: Beaumont Site 2 property boundary from Hillwig-Goodrow survey, May 2004.

Results shown for sampled locations only.

[#] Bold indicates DWNL value exceeded.

Highest concentration shown is contoured for clustered or nested well locations.

0 300 600 Feet




Laborde Canyon  
(Lockheed Martin Beaumont Site 2)

**Figure 9**  
**1,4-Dioxane**  
**Isoconcentration Map (µg/L)**  
**Second Quarter 2014**





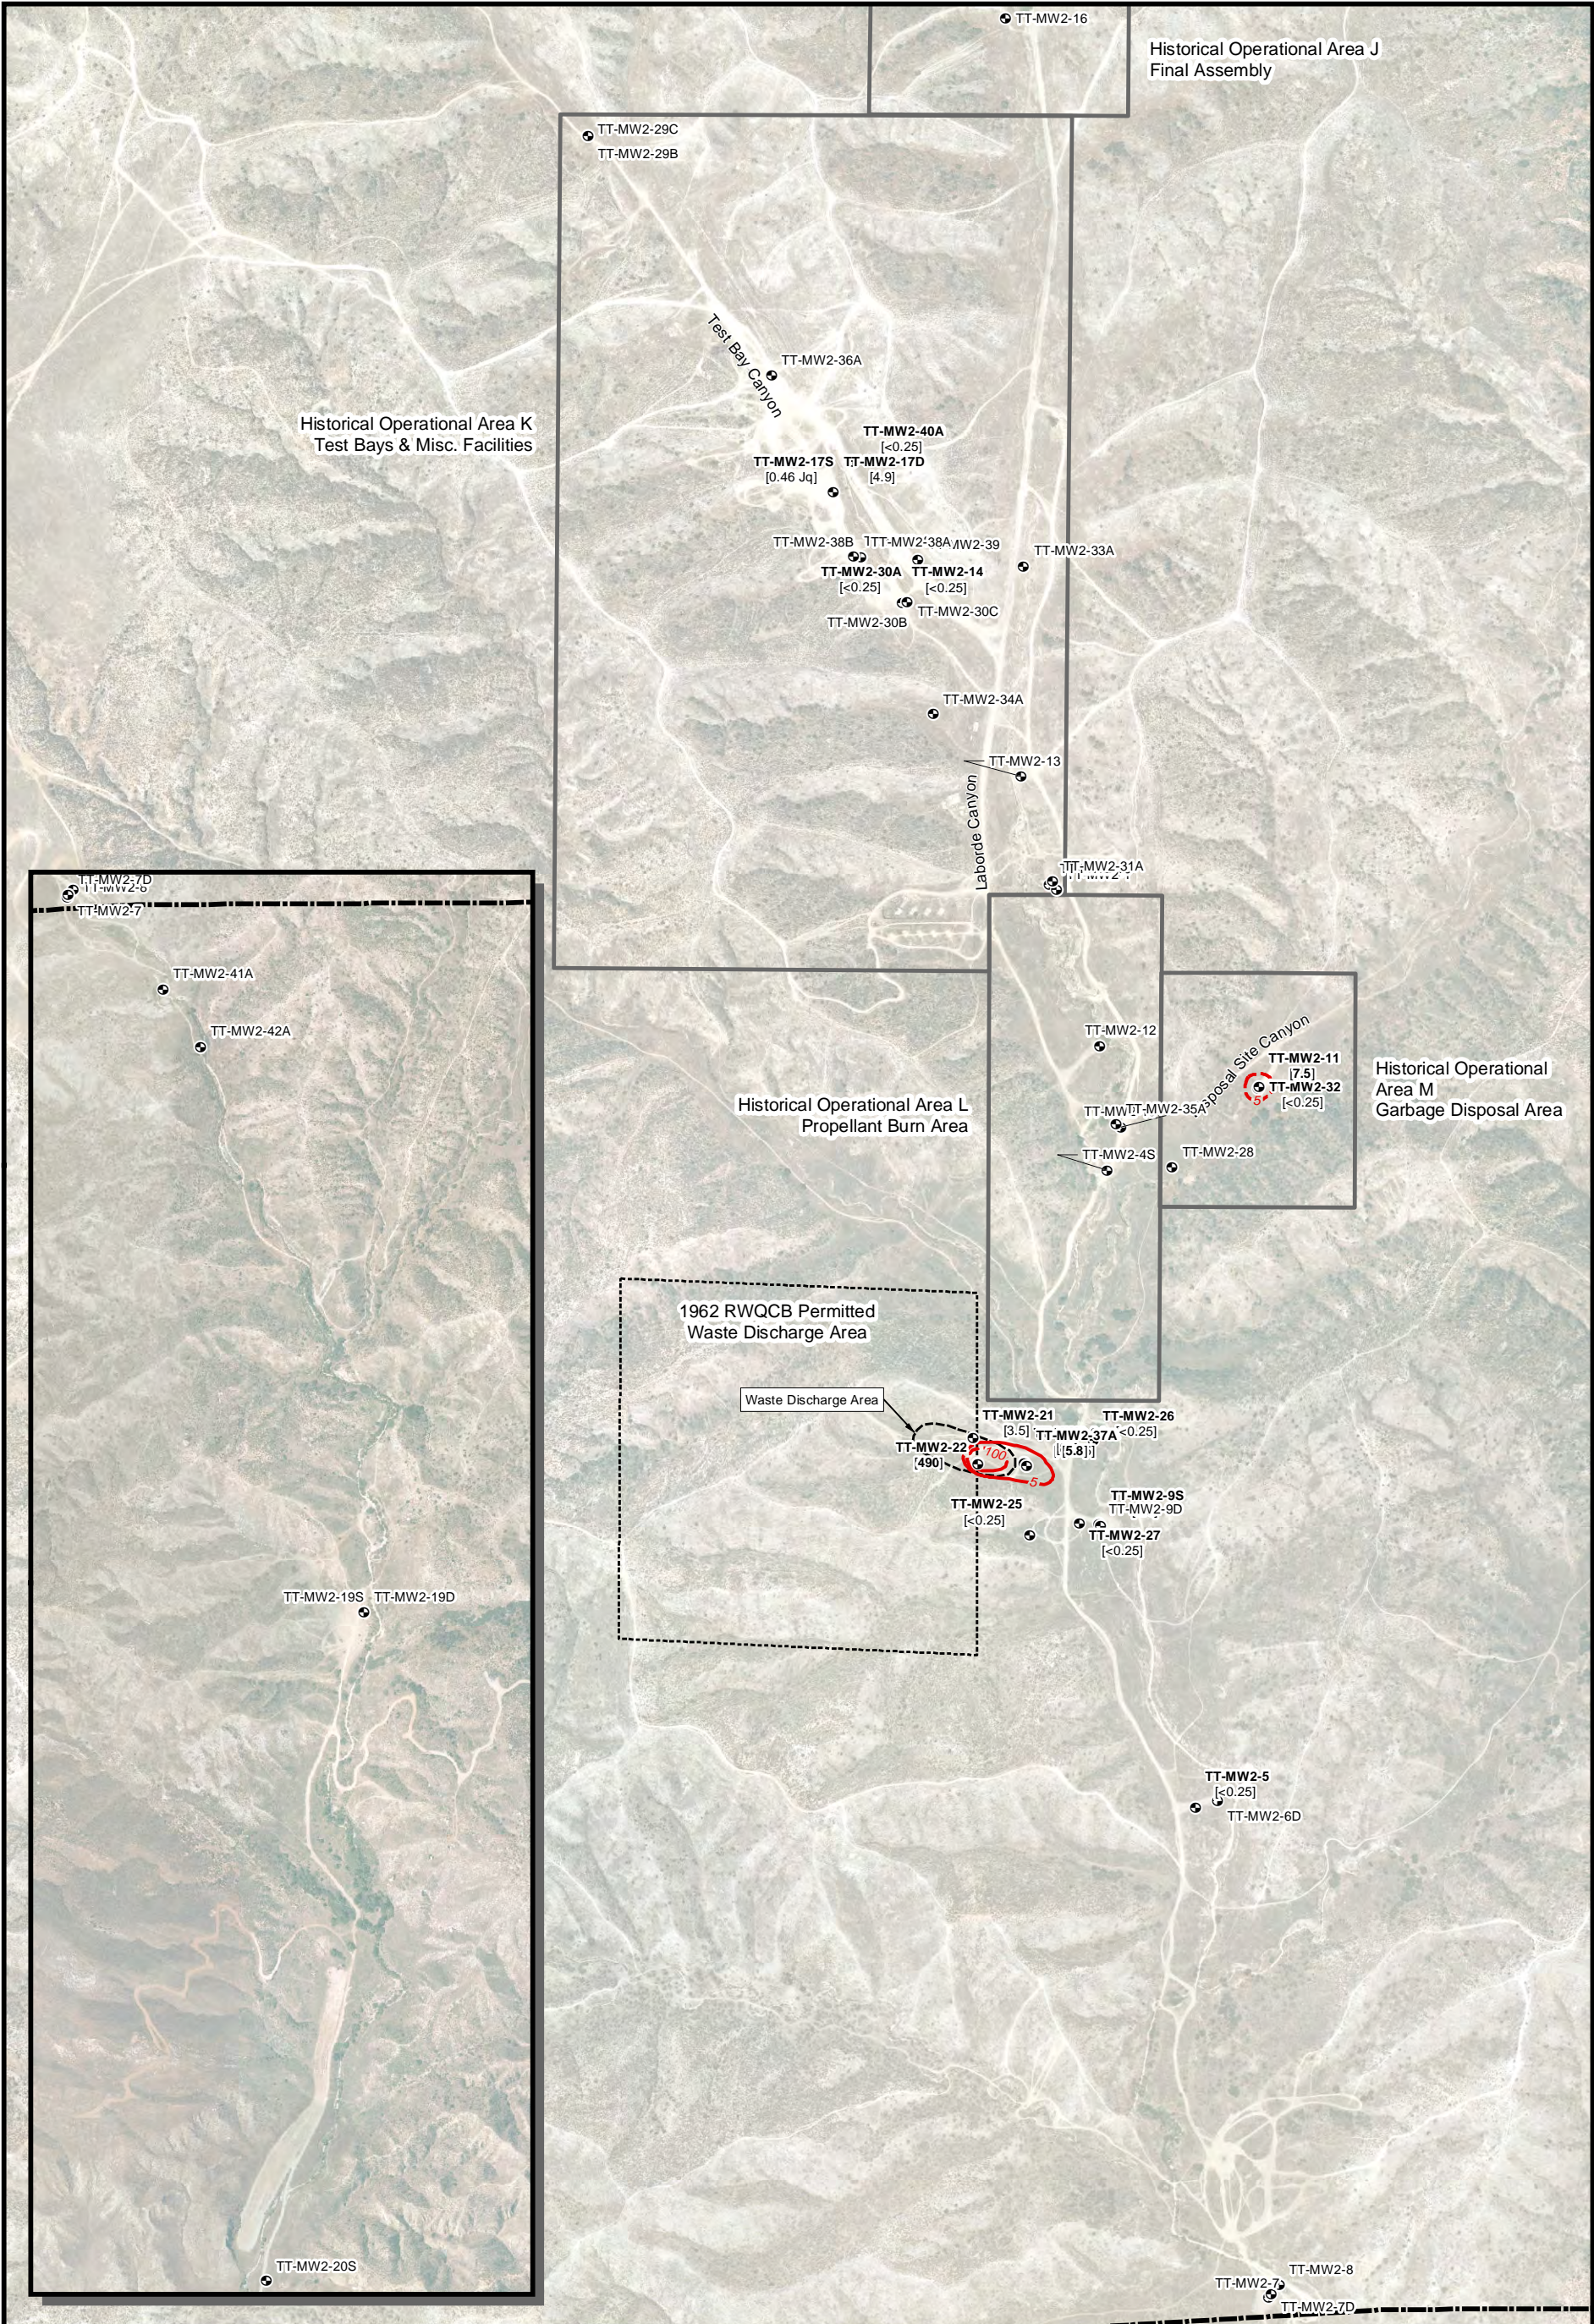


LEGEND

- Well Location with Trichloroethene Concentration (µg/L)
- Trichloroethene Isoconcentration Contour (Dashed where inferred)
- Historical Operational Area Boundary
- Laborde Canyon Site Boundary (Lockheed Martin Beaumont Site 2)

Notes: Beaumont Site 2 property boundary from Hillwig-Goodrow survey, May 2004.  
Results shown for sampled locations only.  
[#] Bold indicates MCL value exceeded.  
Highest concentration shown is contoured for clustered or nested well locations.

Adapted from: April 2007 aerial photograph.




Laborde Canyon  
(Lockheed Martin Beaumont Site 2)

Figure 10  
Trichloroethene (TCE)  
Isoconcentration Map (µg/L)  
Second Quarter 2014





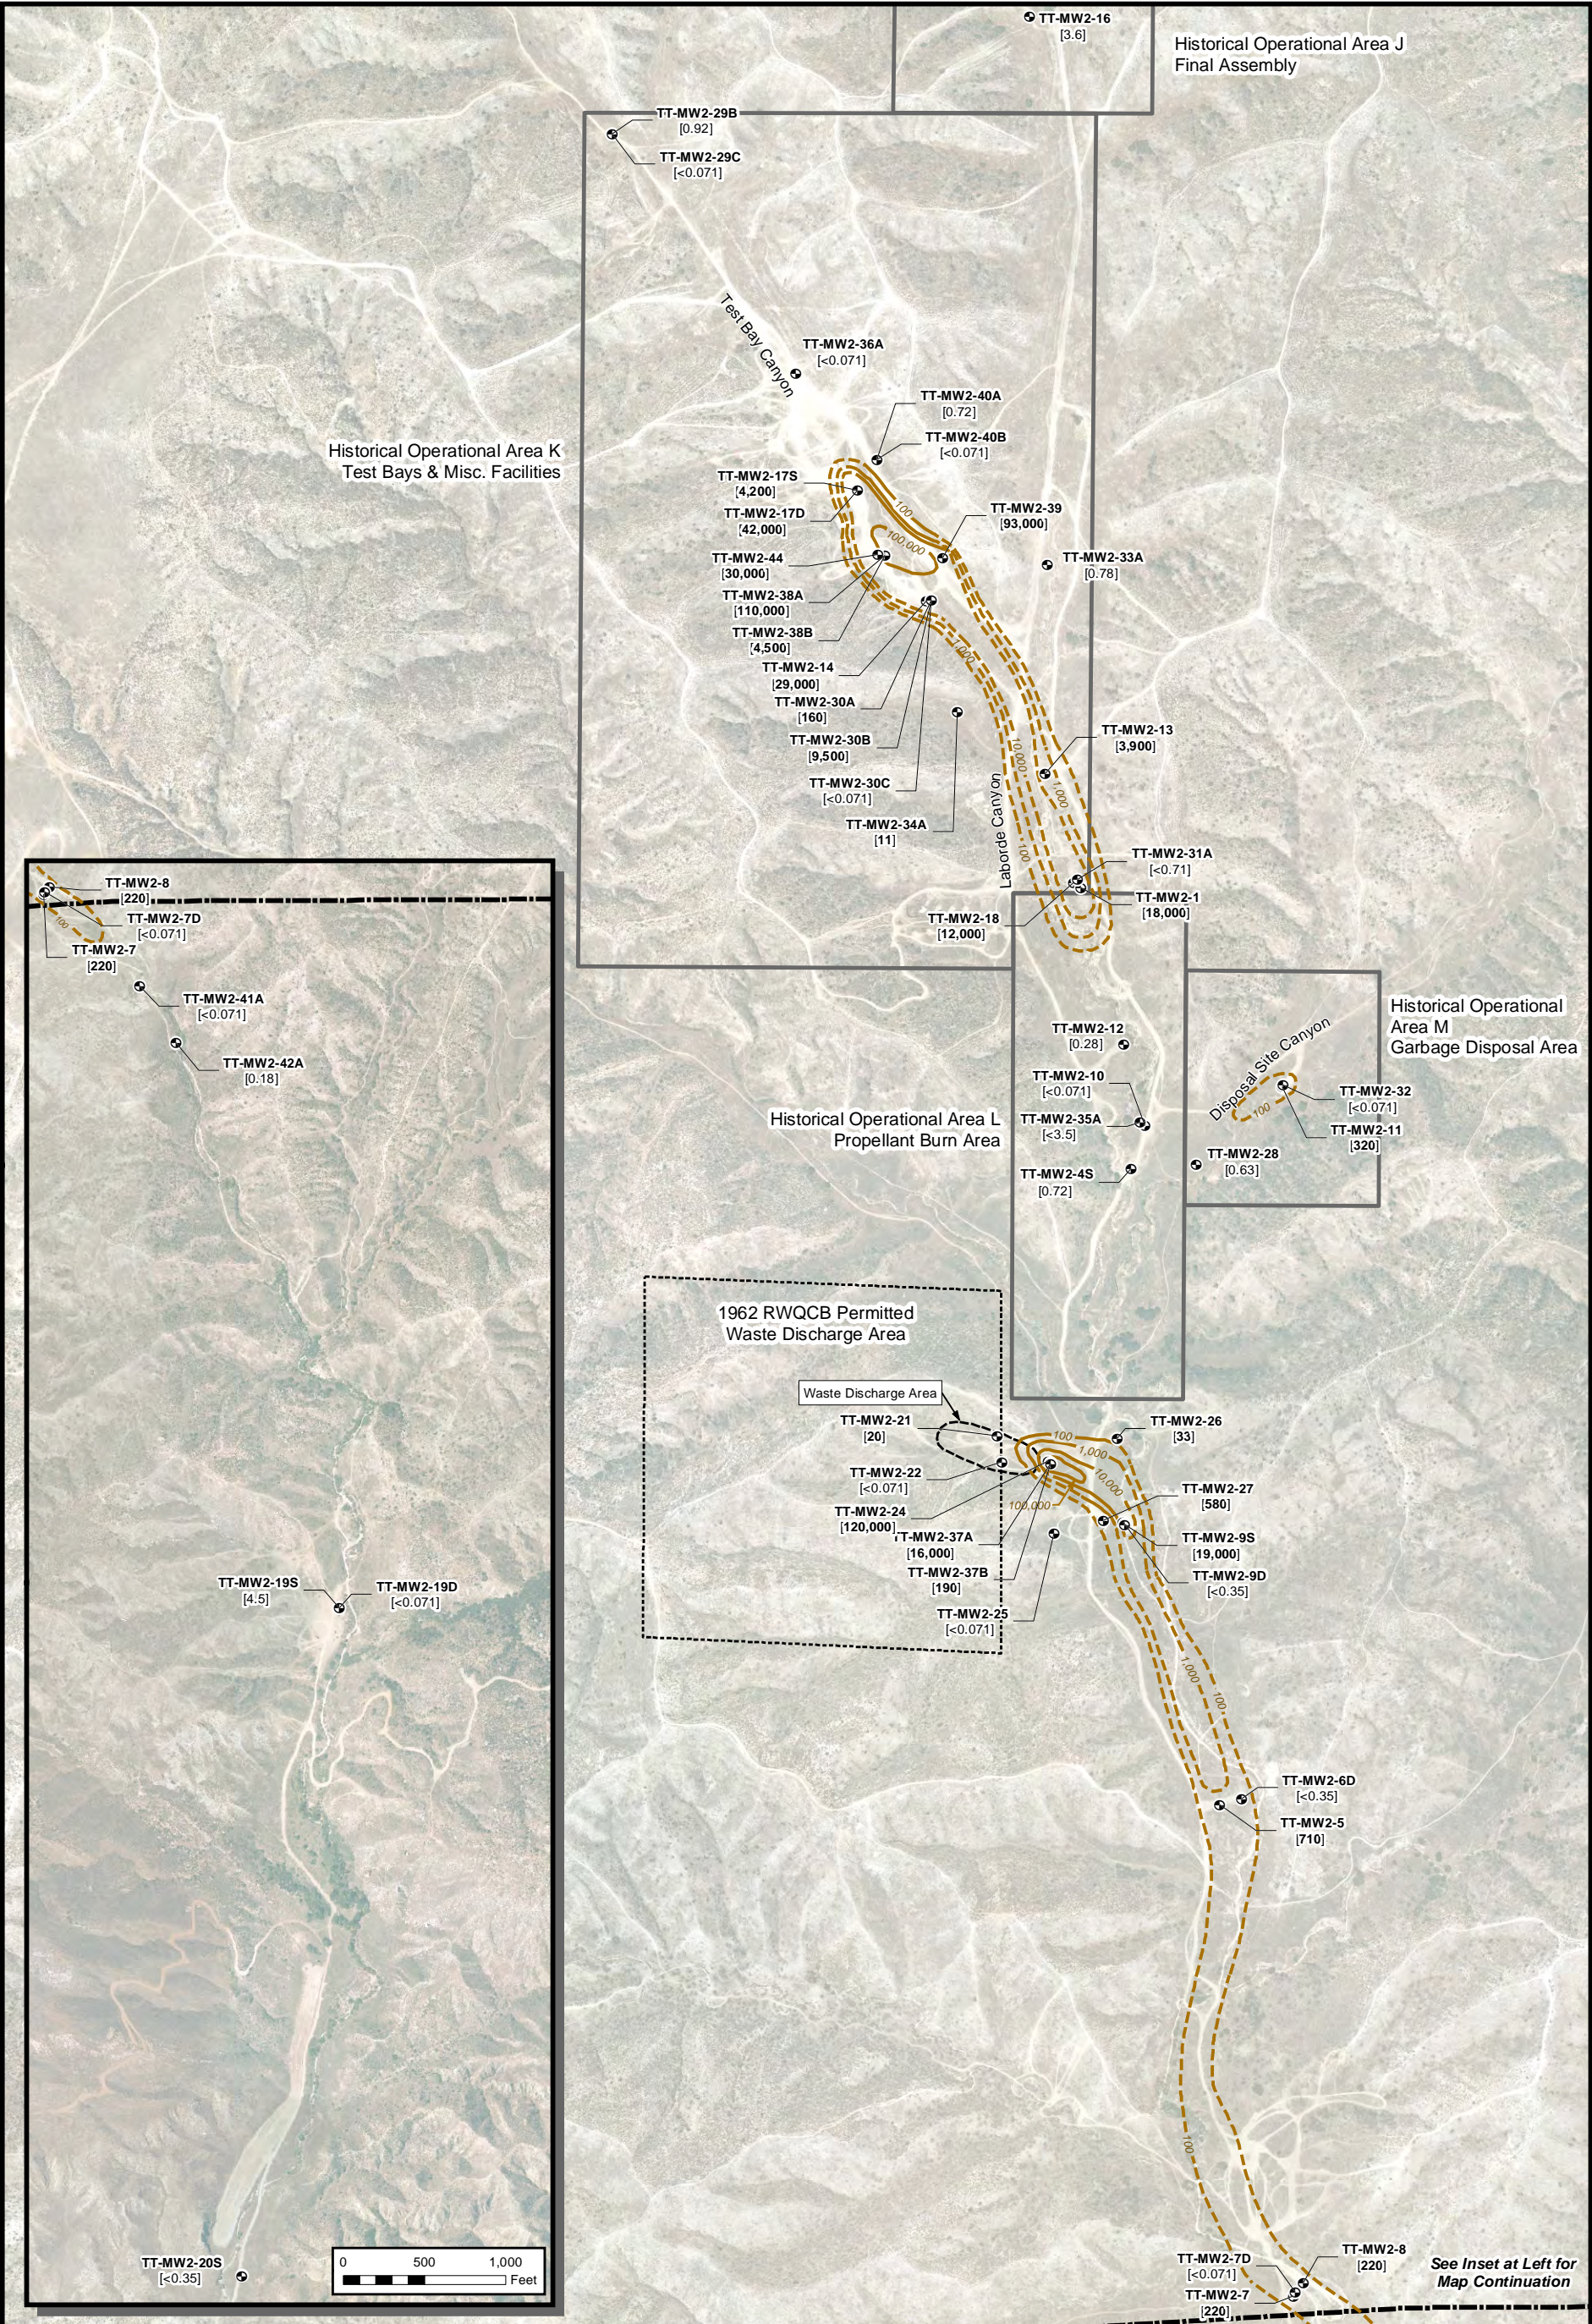

LEGEND

- Well Location with Perchlorate Concentration (μg/L)
- Perchlorate Isoconcentration Contour (Dashed where inferred)
- Waste Discharge Area
- RWQCB Permitted Waste Discharge Area



Historical Operational Area Boundary  
Laborde Canyon Site Boundary  
(Lockheed Martin Beaumont Site 2)

Notes: Beaumont Site 2 property boundary from Hillwig-Goodrow survey, May 2004.  
Results shown for sampled locations only.  
[#] Bold indicates MCL value exceeded.  
Highest concentration shown is contoured for clustered or nested well locations.

0 300 600 Feet




Laborde Canyon  
(Lockheed Martin Beaumont Site 2)

Figure 11  
Perchlorate  
Isoconcentration Map (μg/L)  
Second Quarter 2014





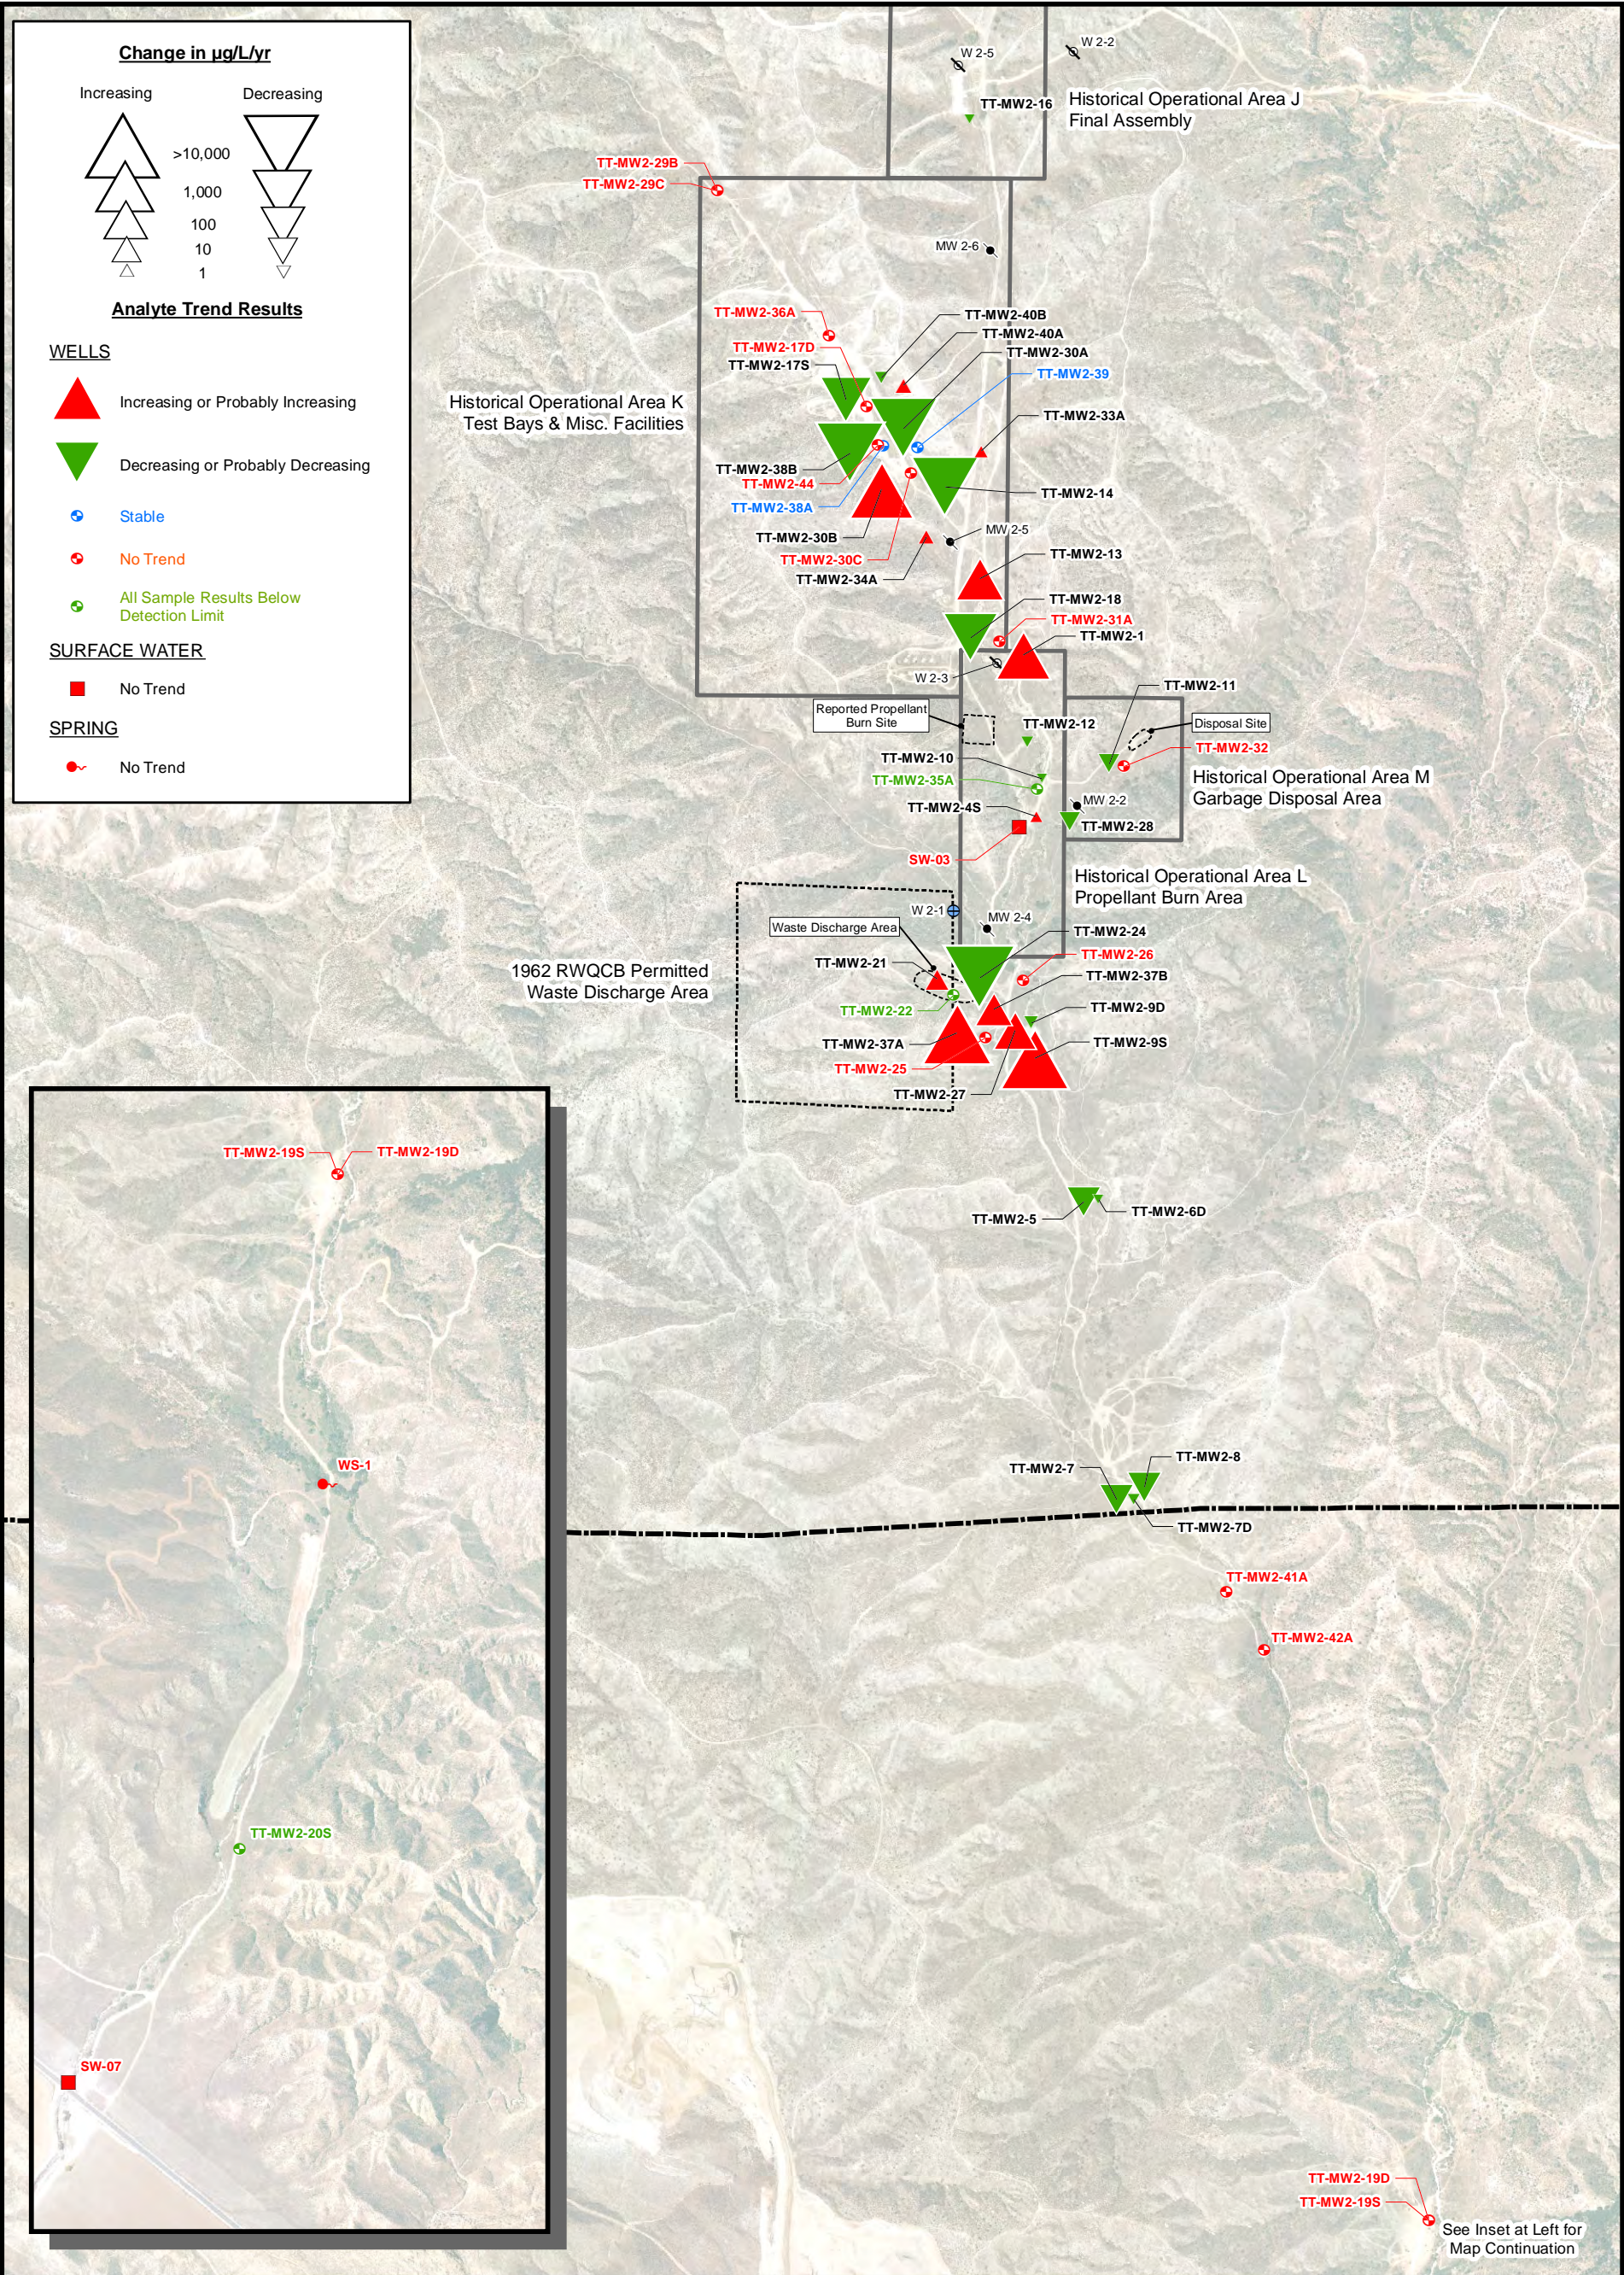

LEGEND

- Destroyed Production Well Location
- Destroyed Monitoring Well Location
- Reported Production Well Location
- RWQCB Permitted Waste Discharge Area
- Historical Operational Area Boundary
- Laborde Canyon Site Boundary

Adapted from:  
April 2007 aerial photograph.

Note:  
Beaumont Site 2 property boundary from  
Hillwig-Goodrow survey, May 2004.

0 500 1,000 Feet




Laborde Canyon  
(Lockheed Martin Beaumont Site 2)

Figure 12

Perchlorate Statistical Analysis  
Summary Results





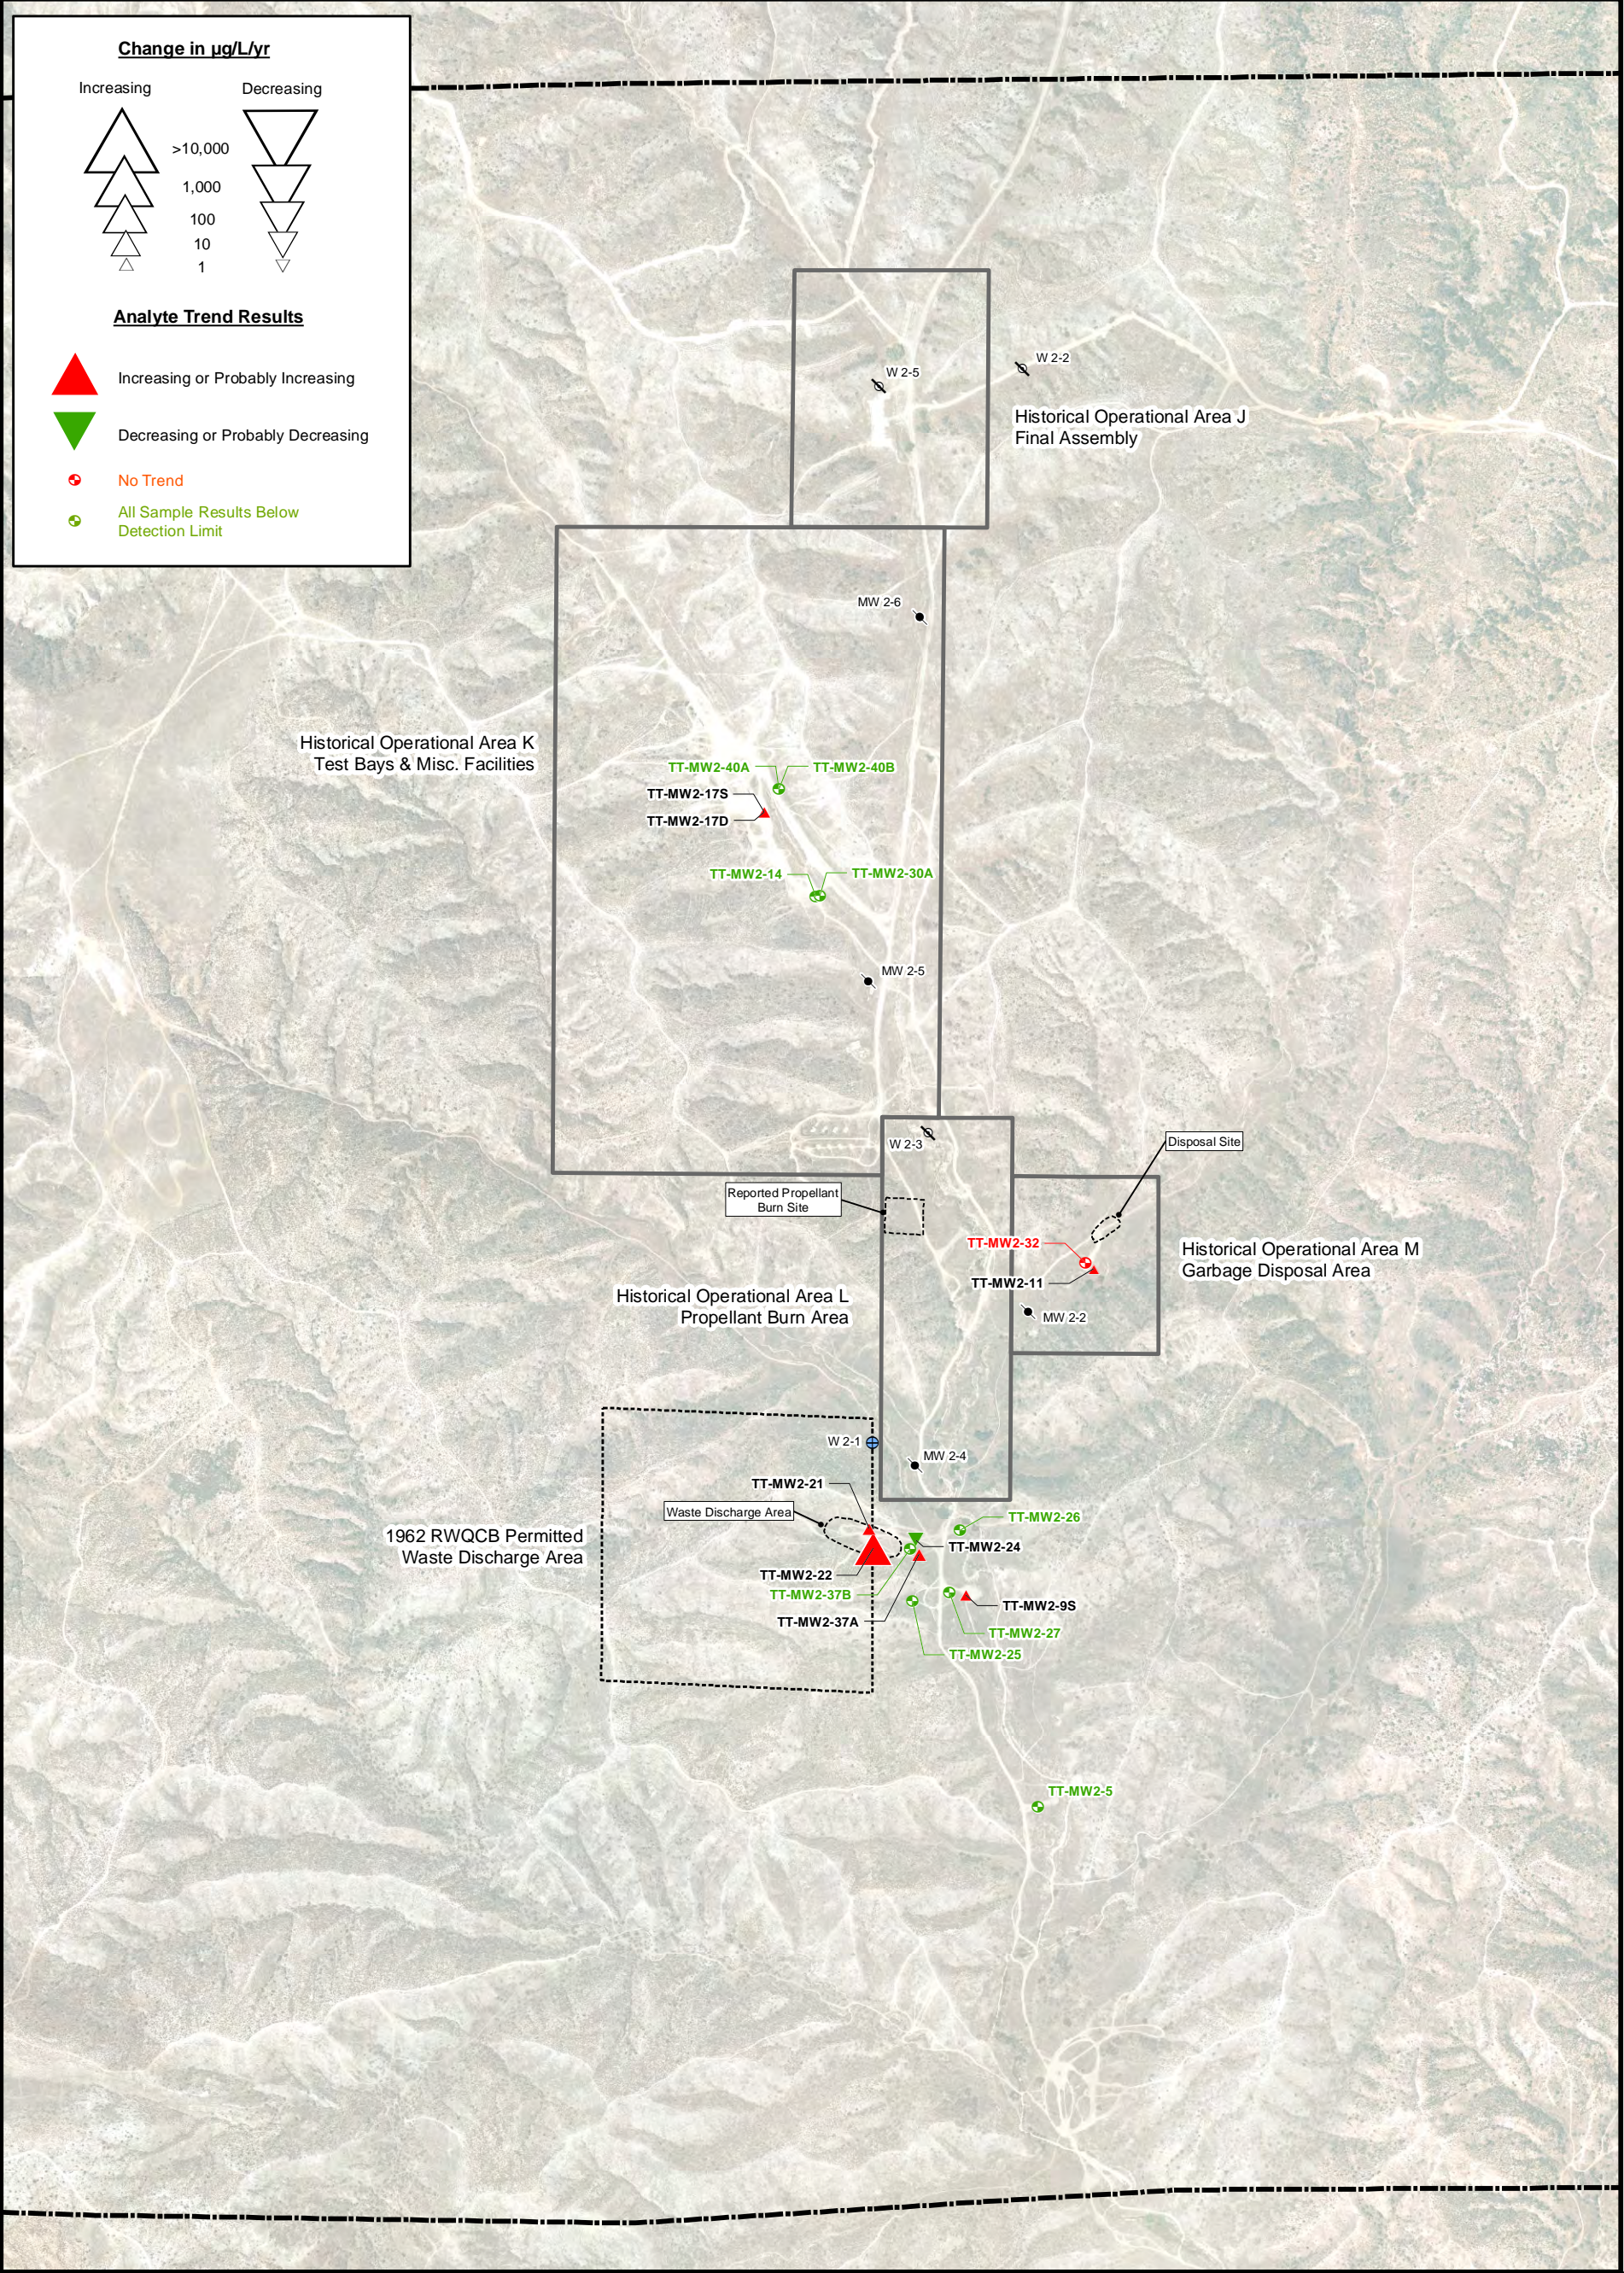

**LEGEND**

- Destroyed Production Well Location
- Destroyed Monitoring Well Location
- Reported Production Well Location
- RWQCB Permitted Waste Discharge Area
- Historical Operational Area Boundary
- Laborde Canyon Property Boundary

Adapted from:  
April 2007 aerial photograph.

Note:  
Beaumont Site 2 property boundary from  
Hillwig-Goodrow survey, May 2004.

0 400 800  
Feet




Laborde Canyon  
(Lockheed Martin Beaumont Site 2)

**Figure 13**

**TCE Statistical Analysis  
Summary Results**



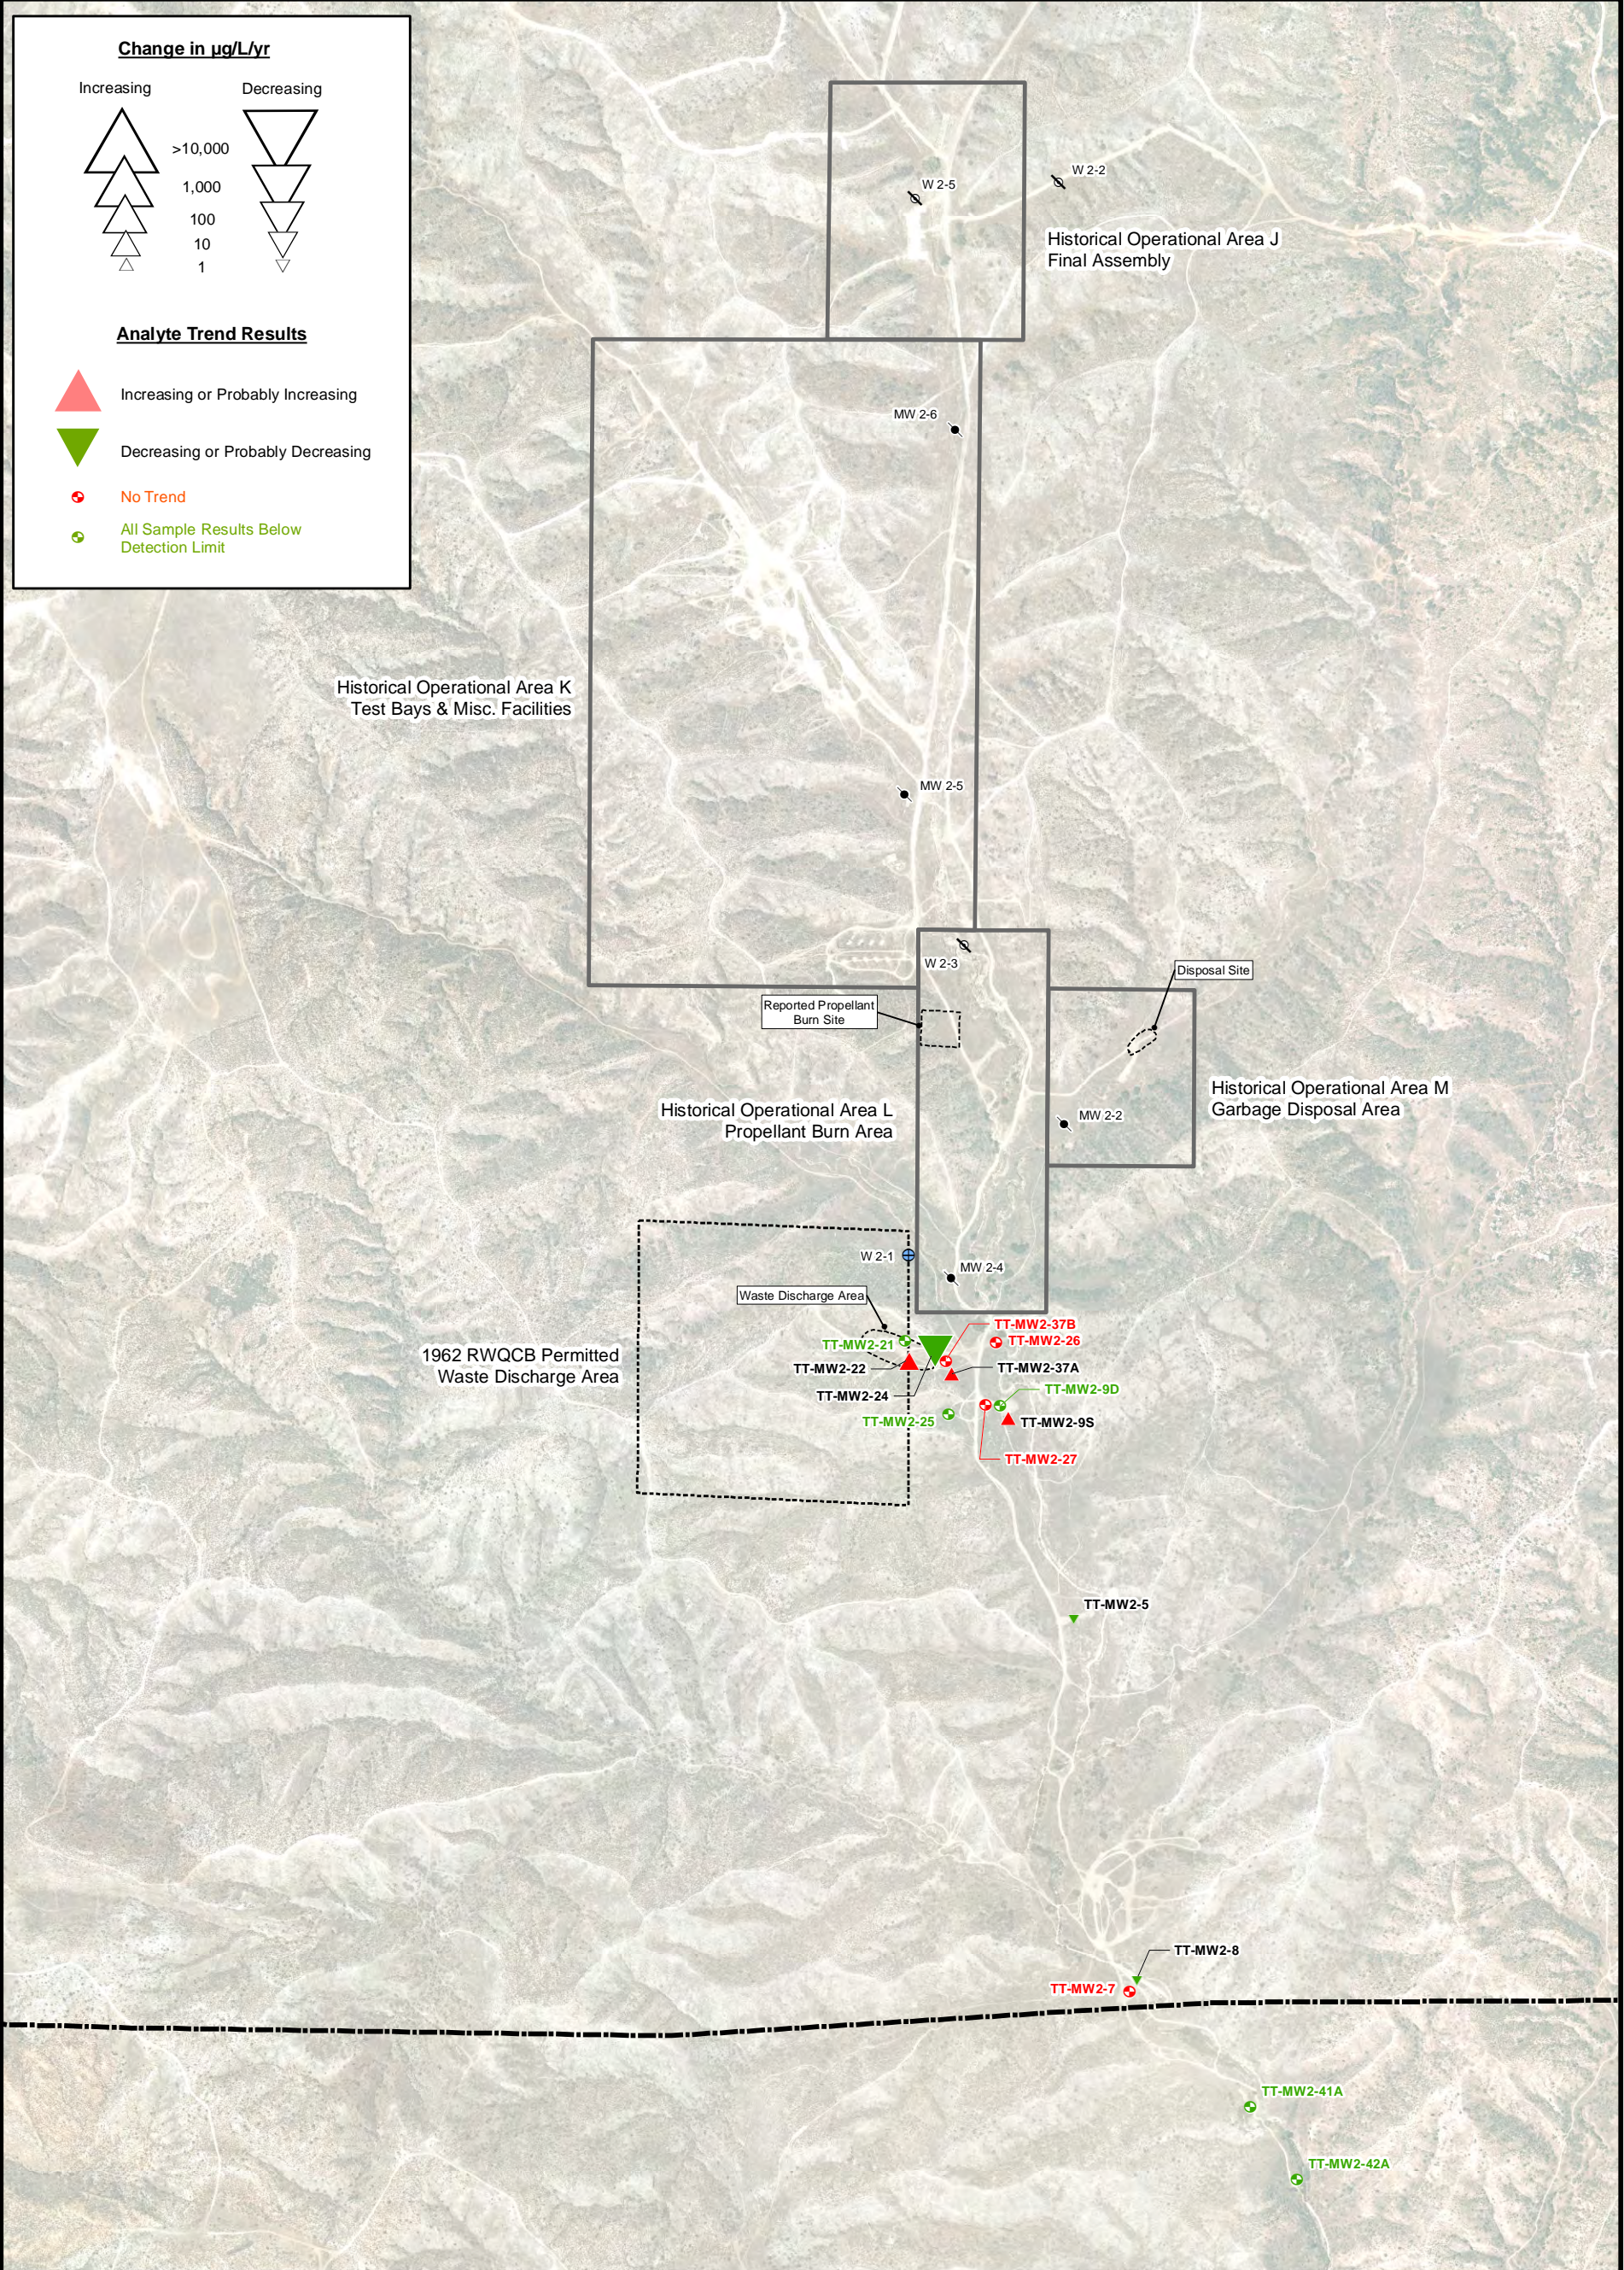


LEGEND

- Destroyed Production Well Location
- Destroyed Monitoring Well Location
- Reported Production Well Location
- RWQCB Permitted Waste Discharge Area
- Historical Operational Area Boundary
- Laborde Canyon Site Boundary

Adapted from:  
April 2007 aerial photograph.

Note:  
Beaumont Site 2 property boundary from  
Hillwig-Goodrow survey, May 2004.





Laborde Canyon  
(Lockheed Martin Beaumont Site 2)

**Figure 14**

**1,4-Dioxane Statistical  
Analysis Summary Results**



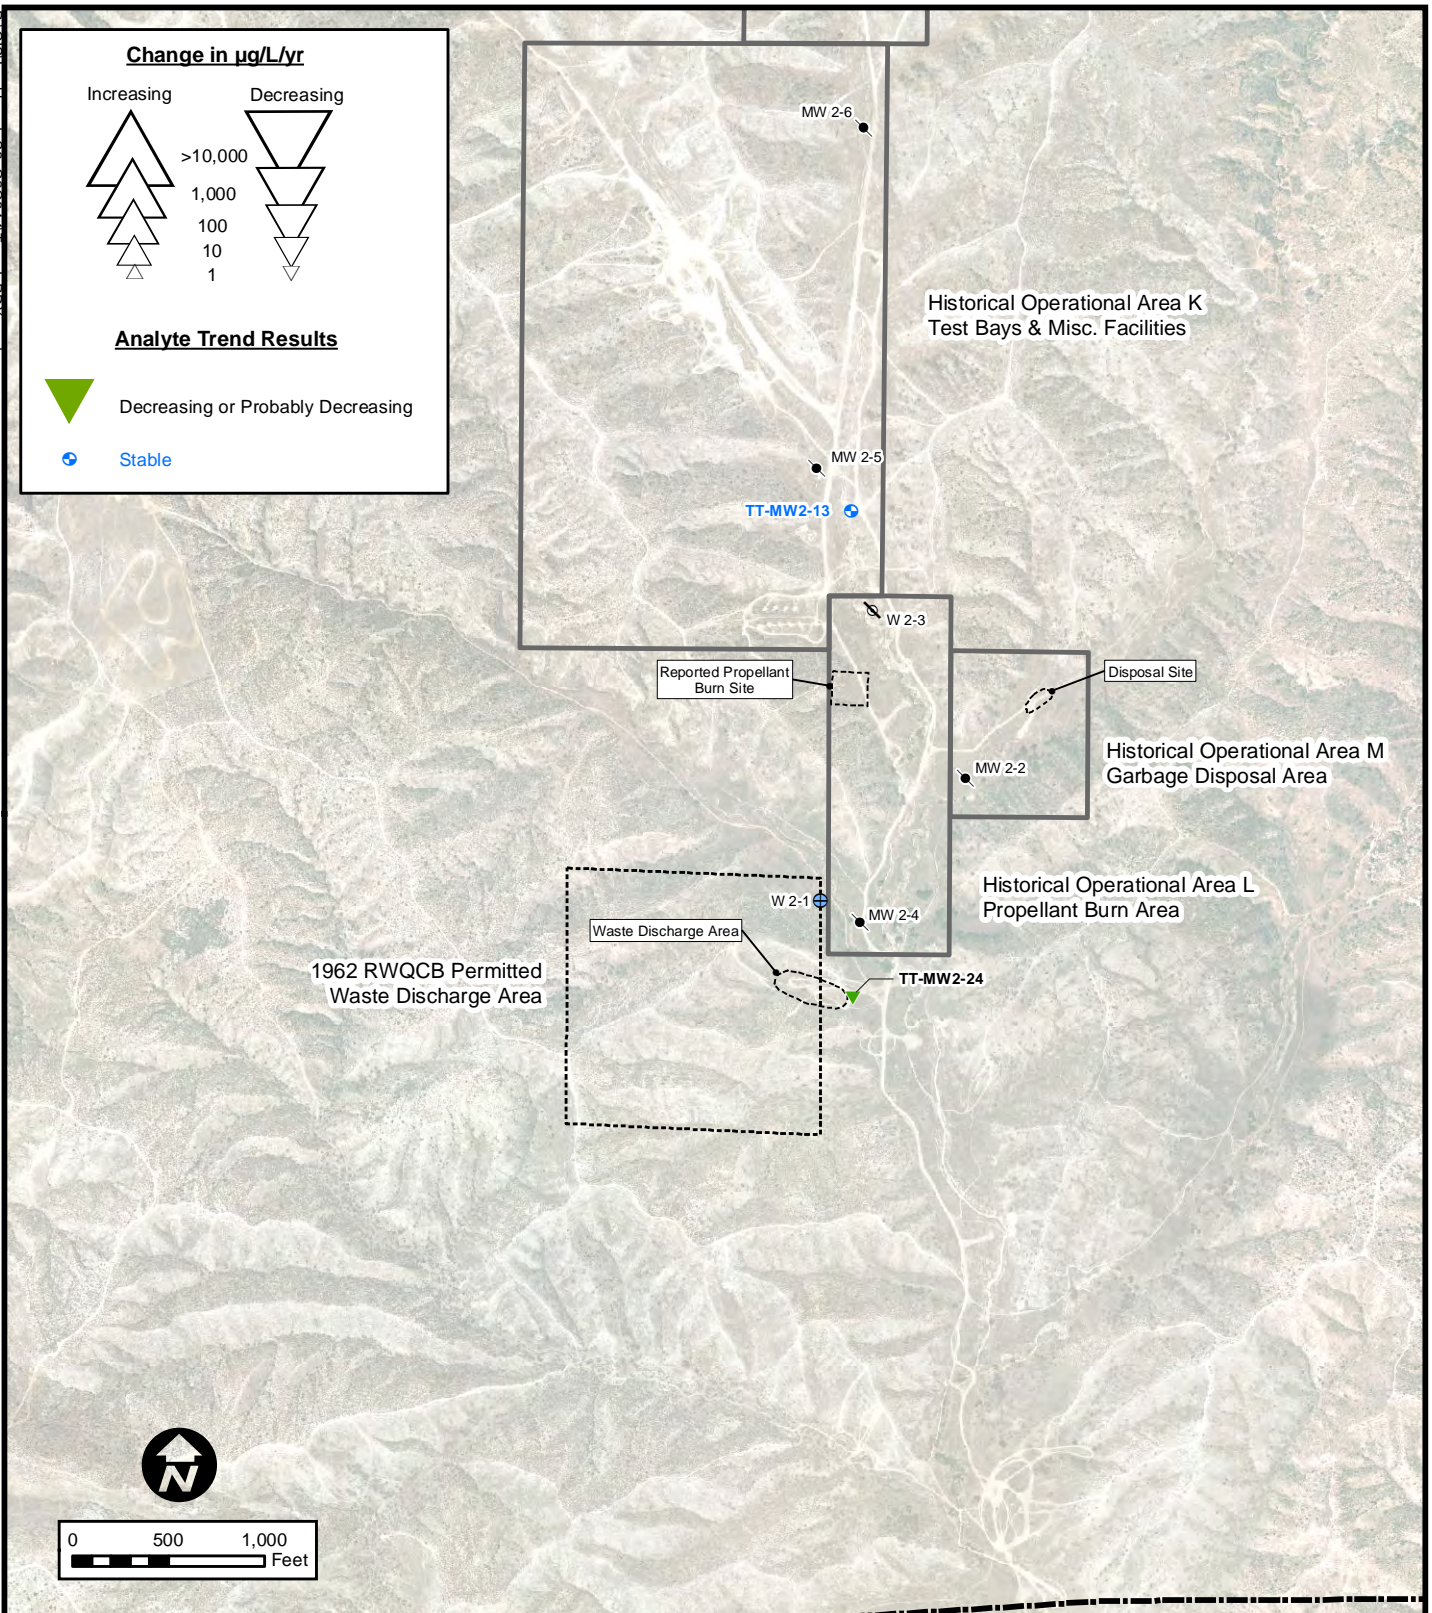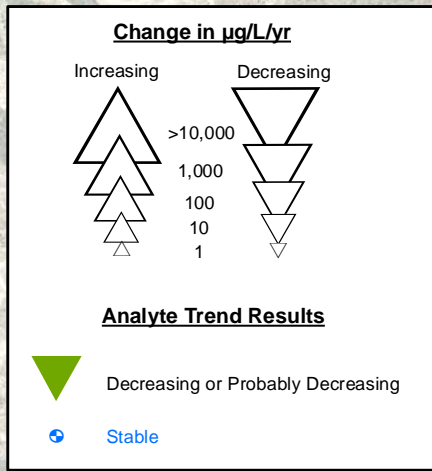

**LEGEND**

- Destroyed Production Well Location
- Destroyed Monitoring Well Location
- Reported Production Well Location
- RWQCB Permitted Waste Discharge Area



Historical Operational Area Boundary



Beaumont Site 2 Site Boundary

Adapted from: April 2007 aerial photograph.

Note: Beaumont Site 2 property boundary from Hillwig-Goodrow survey, May 2004.

Laborde Canyon  
(Lockheed Martin Beaumont Site 2)

**Figure 15**

**RDX Statistical  
Analysis Summary Results**

